

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 29, Township 134N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On DEC. 15, 1987 placed a 4" CAST IRON COUNTY MONUMENT, 1" ABOVE GROUND.
- ROCKS PILED AROUND MONUMENT, ALSO MONUMENT IS AT BASE OF HILL.

NO SCALE

SKETCH OF REFERENCE TIES

NOTE: ALL BEARINGS ARE MAGNETIC.
DISTANCES ARE TO DUPLEX NAILS IN SIDE OF TREES.
ALL TREES ARE MARKED WITH DOUBLE BLAZES.

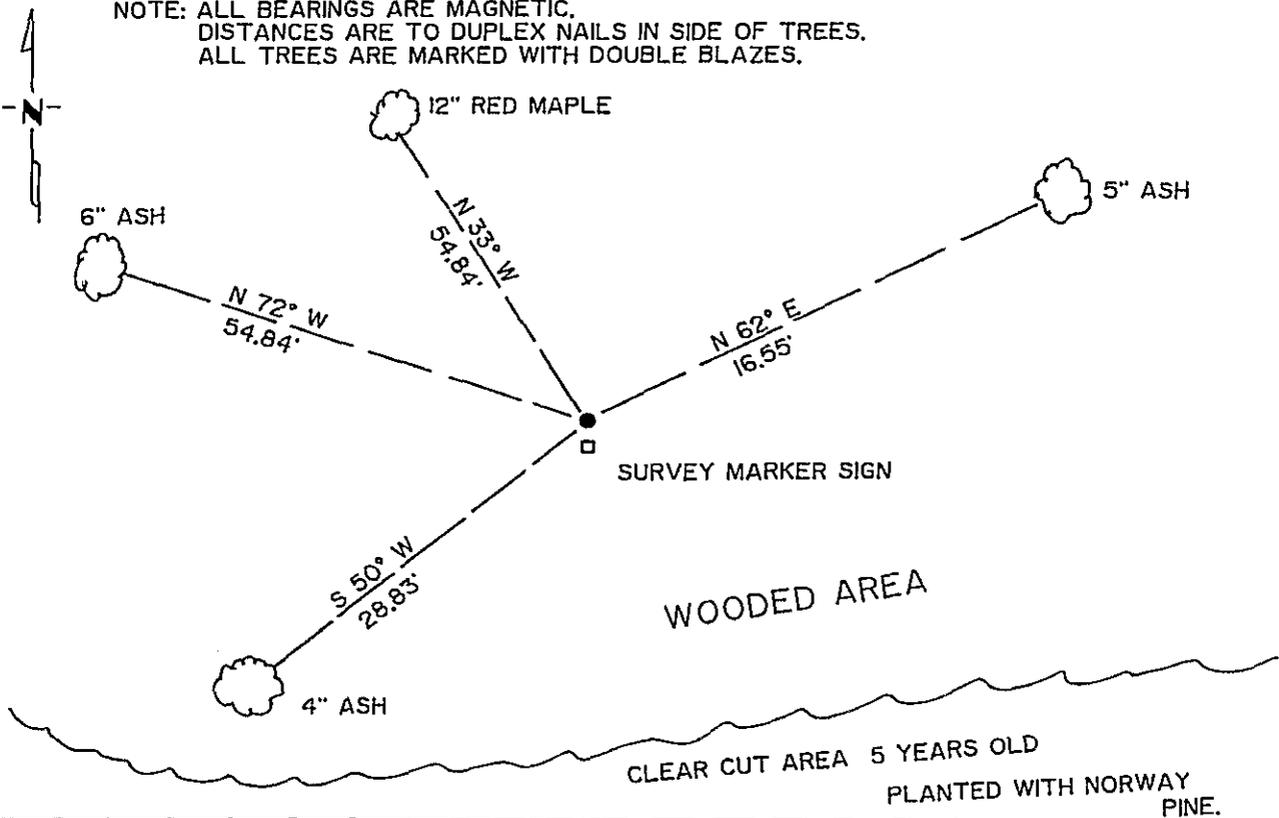

Statement of evidence relative to this corner location is on back of page. 302265

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald A. Landecker 12/31/87
SIGNATURE DATE

Registration No. 17008

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Pen

I hereby certify that this document was filed in the Co. Recorders office at 3:41 P. .M. on the 13 day of January A.D., 19 88

County Recorder Clairline Kay
By Ms, Deputy

DOCUMENT NO. 302265

Statement of Evidence:

R-9

Northeast Corner, Section 29, Township 134 North, Range 30 West, Cass County, Minnesota.

In 1868 the original government survey was done by N. Butler. A wood post was set to mark the corner. Four bearing trees witnessing said corner were marked, noted as follows:

8" White Oak North 12 degrees West, 32 links

15" Poplar North 42 degrees East, 38 links

13" Birch South 61 degrees East, 18 links

7" Ash South 64 degrees West, 36 links.

In 1987 David Landecker RLS #17008 surveyor with the firm Landecker & Associates, Inc. searched for and found no evidence of said corner or bearing trees.

A monument was set at this corner as noted on the face of this Certificate in accordance with State and Federal survey standards.

Landecker File Number 87109