

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 15, Township 143 N., Range 26 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 5/27/87 placed a 1 1/4" x 1 1/4" x 20" PERFORATED STEEL TUBE WITH
DATE ALUMINUM CAP STAMPED "DNR SURVEY MARKER", DOWN 0.4'

SKETCH OF REFERENCE TIES

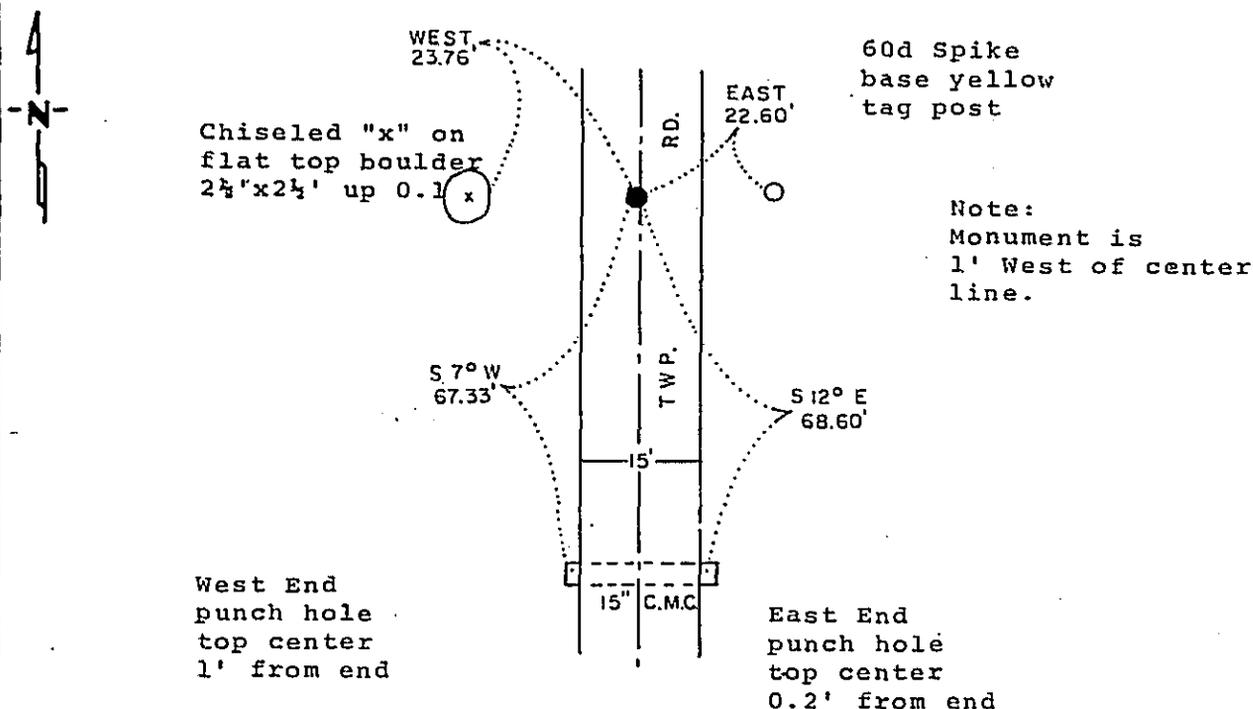

Statement of evidence relative to this corner location is on back of page.

J.A.G. 6/26/87
FILE G-321

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 2-1-88
SIGNATURE DATE

Registration No. 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

303528
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:40 P.M. on the 4 day of April A.D., 19 88

County Recorder Claudia Kayler

By ms, Deputy

DOCUMENT NO. 303528

North Quarter Corner Section 15, Township 143 North, Range 26 West

- 1872 The U.S. General Land Office set a post and recorded two bearing trees.
- 1900 The U.S. Corp of Engineers describes this corner as known.
- 1916 A survey on page 171 in Book "C" in the County Recorder's Office of E. B. Horst states that both GLO bearing trees were in place.
- 1935 The Civilian Conservation Corp. found an oak stake in place in good condition. The C.C.C. notes state that the stake was set by the County. The Corp. had a distance of 5466.75' to the south 1/4 corner of Section 15.
- 1959 The DNR set a spike in a north-south road 22.0 feet west of a C.C.C. reference post.
- 1987 The DNR placed a standard DNR monument as shown and described on this certificate. Dug a 3 ft. x 2.5 ft. x 1.6 ft. deep hole to below natural ground but found nothing. The DNR got a distance of 5436.14 ft. to the south 1/4 corner of Section 15.