


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 22, Township 141N, Range 30W, 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 01' 21.87072"
 Longitude: 94° 27' 35.18961"

- On 6-21-88 found a 2" iron monument with brass cap
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

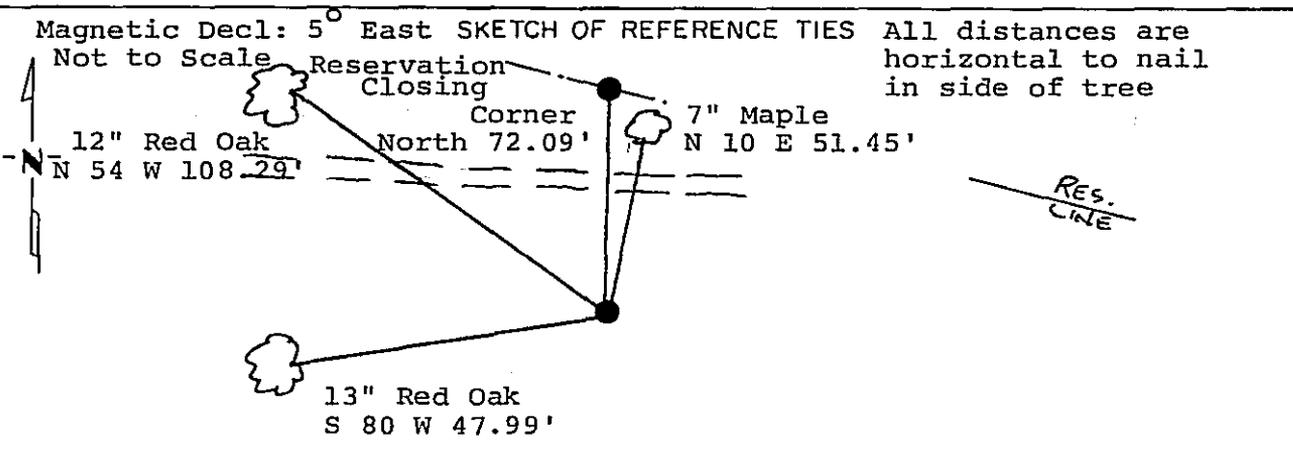

Monument is located
 32 feet south of
 Forest Service Trail
 #3735, clearing northerly
 of Aspen regeneration
 Sign post north 1.90'

Monument Stamped

T 141 N R 30 W

S 15

S 22

1978

R.L.S. No. 12261

All trees are painted with red enamel
 and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 309843

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 10:30 A.M. on the 12 day of January A.D., 1989

County Recorder Claudine Kayle

By ms, Deputy

DOCUMENT NO. 309843

Statement of Evidence:

North Quarter Corner Section 22, Township 141
North, Range 30 West, Cass County, Minnesota

N-15 141-30
Bk.5 Pg.7

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 18 inch Yellow Pine South 49 degrees East a distance of 19 links; and a 13 inch White Pine North 23 degrees East a distance of 55 links.

1914 County Surveyor's Record Book B pages 516-520 show a survey by James Middleton. A wood hub set from old Government bearing trees: a 18 inch Yellow Pine (remains) South 48 degrees East a distance of 19 links; and a 13 inch Yellow Pine stub North 23 degrees East a distance of 55 links.

1917 U.S. General Land Office dependant resurvey found the corner marked by a wooden stake 3 inches by 3 inches by 24 inches above ground marked "1/4 S15" on North face and one original bearing tree; a Pine (dead) North 23 degrees East a distance of 55 links marked 15; no traces of Southeast bearing tree.

1978 U.S. Forest Service set a 5 foot by 6 inch diameter concrete monument with a marked brass cap to identify corner, steelpost North a distance of 1.9 feet and the following witnesses: a 9 inch Birch South 37 degrees East a distance of 15.57 feet; a 13 inch Red Oak South 80 degrees West a distance of 47.99 feet; and a 12 inch Red Oak North 54 degrees West a distance of 108.29 feet.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner. 1 bearing tree was cut off.

1988 on June 21 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a concrete monument with brass cap 32 feet South of Forest Service trail 3735; 1978 bearing trees: a 13 inch Red Oak South 80 degrees West a distance of 47.99 feet; and a 12 inch Red Oak North 54 degrees West a distance of 108.29 feet. New tie, 7 inch Maple North 10 degrees East a distance of 51.45 feet; closing corner on reservation line is North a distance of 72.09 feet; post and sign 54-9 North a distance of 1.9 feet. The location of this monument fits that of the 1914 County and 1917 U.S. surveys.