

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 19, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: 47° 01' 22.178"


Longitude: 94° 23' 45.299"

- On 7/6/88 found a 1" iron monument with brass cap. USFS
DATE
set rerod from 1918 GLO BT TIES at monument base
 left monument as found, lowered monument, removed monument (explain)
- On 7/26/88 placed a 2" x 24" iron monument with a brass cap
DATE
6 inches below surface of road.

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

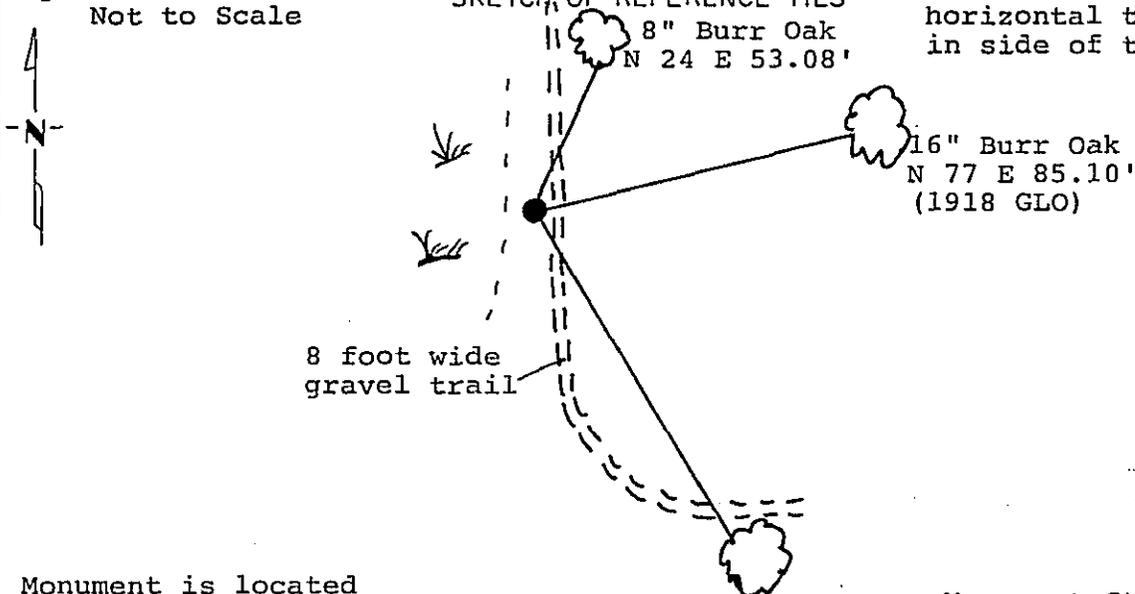

Monument is located 5 feet west of center-line of North-South trail, 15 feet, more or less, East of swamp, and 1 foot west-southwest of treated post.

8' steel sign post West 2.0 feet.

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

T 141 N R 29 W
 S 18

S 19
 1988

RLS No. 17008

Statement of evidence relative to this corner location is on back of page.

311037

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 1-18-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:20 A.M. on the 25 day of January A.D., 19 89

County Recorder Clondine Kayler

By MS, Deputy

DOCUMENT NO. 310037

Statement of Evidence:

North Quarter Corner Section 19, Township 141
North, Range 29 West, Cass County, Minnesota

N-3 141-29
Bk.4 Pg.16

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 4 inch Birch South 32 degrees West a distance of 34 links; and a 4 inch Birch North 78 degrees West a distance of 13 links.

1917 County Surveyor's Record Book C page 267 show survey by John Curo. He set a 2 inch by 48 inch iron monument proportionally.

1918 U.S. General Land Office dependant resurvey found the corner marked by a 1 and 1/4 inch galvanized pipe at a proportional point established by county surveyor. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 14 inch White Oak North 77 degrees 15 minutes East a distance of 129 links; and a 14 inch White Oak South 30 degrees 15 minutes East a distance of 227 links.

1986 U.S. Forest Service crews set a rerod and aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 6 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: monument bent, with rerod at base of pipe; both 1918 General Land Office ties that check with rerod set by the United States Forest Service in 1986.

1988 on July 26 a Landecker-Stevenson & Associates crew set a 2 inch by 24 inch iron pipe with marked brass cap down 6 inches at 1918 General Land Office location. 1 new bearing tree was marked and is shown on front of this certificate, an 8 foot steel sign post is in place as noted on front of this certificate.