

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Point South

of Meander Corner of Sections 26/27, Township 141 N., Range 30 W., 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch: Latitude: 47° 00' 23.666"
 Longitude: 94° 26' 59.118"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 1/27/89 placed a 2 inch by 48 inch iron pipe with brass cap,
DATE
plastic base and magnet as Witness Point on Section line.

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

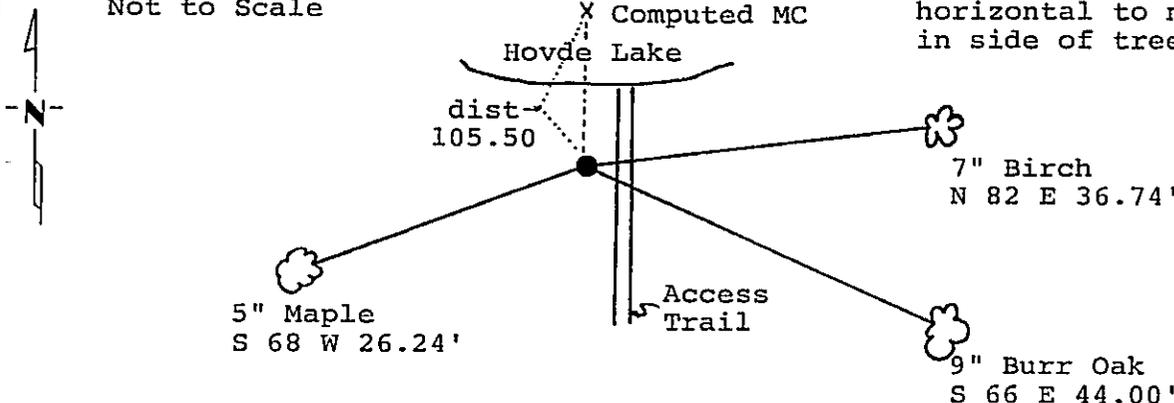

Monument is located 35' southerly of the South shore of Hovde Lake and 14' westerly of access trail to lake.
 8' steel sign post North 5.0'

Monument Stamped
 T141N R30W
 WP
 S27+S26
 1989
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

310869

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/10/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:20 P. M. on the 14 day of March A.D., 19 89

County Recorder Clondine Kayler

By MS, Deputy

DOCUMENT NO. 310869

Statement of Evidence:

Meander Corner, Section 26 and Section 27,
Township 141 North, Range 30 West, Cass County,
Minnesota

RS-17 141-30
Bk.5 Pg.55

1873 P. H. Conger, U.S. Deputy Surveyor, originally established the meander corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 30 inch White Pine South 22 degrees East a distance of 52 links; and a 36 inch White Pine South 25 degrees West a distance of 27 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on September 9 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no original post or accessories were found. Computed position falls in Hovde Lake.

1989 on January 27 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap and plastic base with magnet for a witness point on the line between Sections 26 and 27. The meander corner position was determined lost and computed on line by single proportion between the Northeast Corner Section 22 and the Southeast Corner Section 27, all in said township. This position then fell in Hovde Lake. A witness point was set on the section line 105.50 feet Southerly of computed Meander Corner position. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.