

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 21, Township 141 N, Range 30 W, 5th P.M.



STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 00' 56.976"
 Longitude: 94° 28' 15.069"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/11/88 placed a 2 inch by 54 inch iron pipe with brass cap.
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

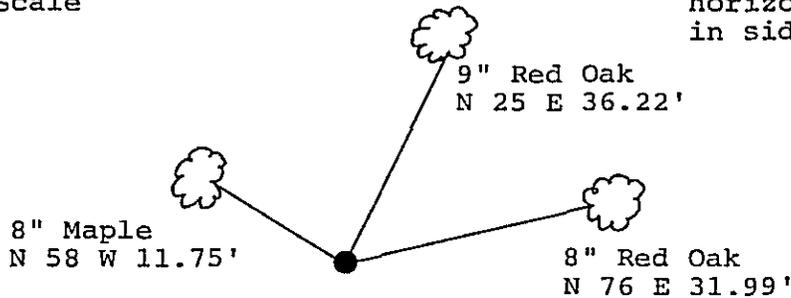

Monument is located on top of Large Rock in hardwoods 350 feet, more or less, northerly of pond.
 8' Sign post North 5.0'

Monument Stamped
 T 141 N R 30 W
 $\frac{1}{4}$
 S21+S22
 1988
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

311060

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:35 A. M. on the 27 day of March, A.D., 1989

County Recorder Claudia Kayler
 By ms, Deputy

DOCUMENT NO. 311060

Statement of Evidence:

East Quarter Corner Section 21, Township 141
North, Range 30 West, Cass County, Minnesota

P-13 141-30
Bk.5 Pg.38

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 30 inch Yellow Pine South 62 degrees West a distance of 26 links; and a 30 inch White Pine South 85 degrees East a distance of 252 links.

1939 Civilian Conservation Corps set Forest Service Location Poster.

1964 U.S. Forest Service technician Ekstrom found the 1939 Forest Service Location Poster. No other evidence was found.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on September 22 a Landecker-Stevenson & Associates crew searched for the corner and found no evidence from the original or following survey visits.

1988 on October 11 a Landecker-Stevenson & Associates crew set a 2 inch by 54 inch iron pipe with brass cap, plastic base and magnet at the lost single proportion position between the Northeast and Southeast corner of Section 21. New bearing trees were marked as shown on front of this certificate. Steel sign posts are in place as shown.