

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 24, Township 141 N, Range 30 W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 00' 56.774"
 Longitude: 94° 24' 24.003"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12/6/88 placed a 2 inch by 48 inch iron pipe with brass cap.
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

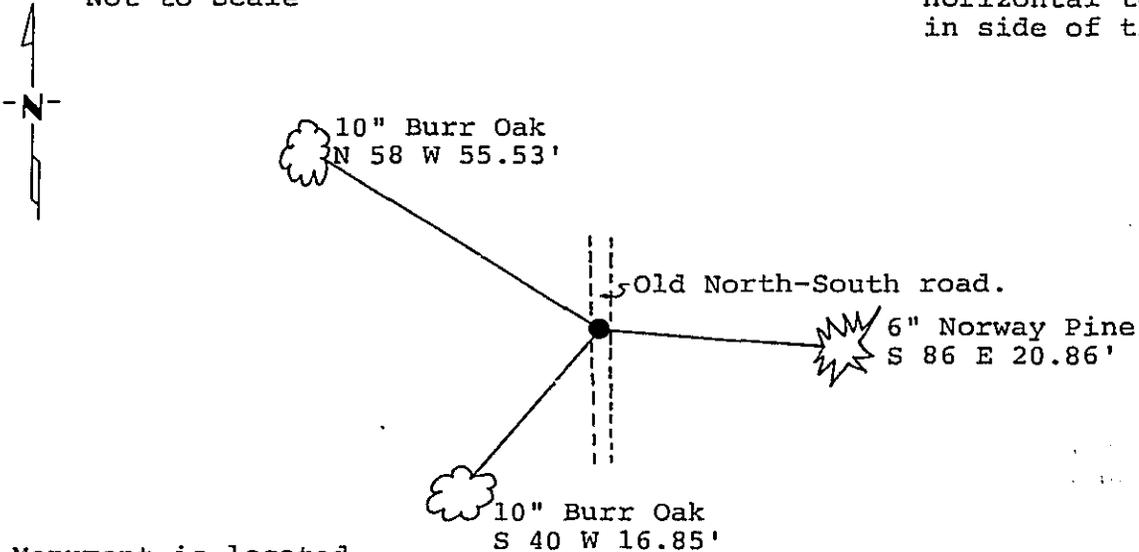

Monument is located at westerly edge of 15-20 year old Norway Pine Plantation and 600 feet, more or less, northeasterly of trail, in old North-South road. 8' Sign post North 5.0' All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped
 T 141 N
 R 30 W R 29 W
 S24+S19
 1988
 RLS 17008

Statement of evidence relative to this corner location is on back of page.

311063

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:50 A.M. on the 27 day of March, A.D., 1989

County Recorder Claudia Kayler
 By MS, Deputy
 DOCUMENT NO. 311063

Statement of Evidence:

East Quarter Corner Section 24, Township 141
North, Range 30 West, Cass County, Minnesota

P-25 141-30
Bk.4 Pg.3

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while running the east township line of Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch White Pine North 31 and 1/2 degrees West a distance of 44 links; and a 10 inch White Pine North 64 and 1/2 degrees East a distance of 39 links.

1912 County Surveyor's Record Book A page 499 show survey by John Curo. He found the Northeast bearing tree and roots of the Northwest bearing tree and set a 3 by 3 by 36 inch Oak stake. New bearing trees: a 3 inch Poplar North 63 degrees East a distance of 26.50 feet; and a 3 inch Poplar South 60 degrees East a distance of 20 feet.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 6 a Landecker-Stevenson & Associates crew searched for the corner using compass and chain to determine search area. The following information was noted: no evidence of post or accessories. Position falls in center of old North-South road.

1988 on December 6 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet at the lost single proportion position between the Northeast and Southeast corners of said Section 24. New bearing trees are shown on front of this certificate and steel sign posts are in place as shown.