

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 34, Township 141N, Range 28W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 33.821"
 Longitude: 94° 12' 18.330"


On 6-16-88 found a 2" iron monument with brass cap (USFS)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

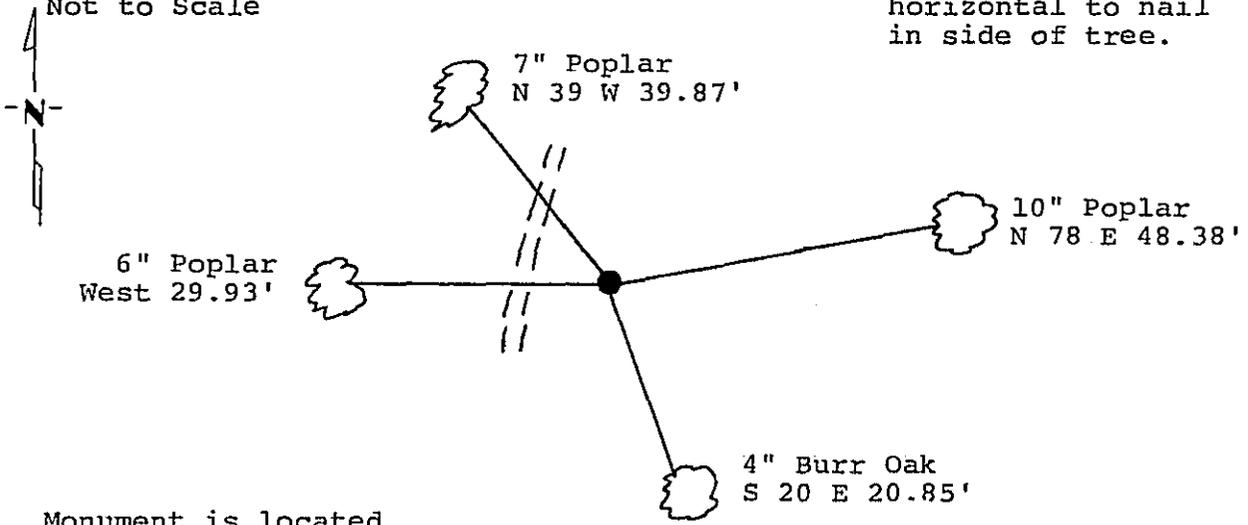

Monument is located
 18' east of trail on
 east side of Longville
 Airport
 Sign post north 5.0'

Monument Stamped

T 141 N	R 29 W
S 27	S 26
S 34	S 35

All trees are painted with red enamel
 and marked with a 54-3 (Bearing Tree) tag.

R.L.S. No. 12684

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/31/89 Registration No. 17008

311163
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:25 A .M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kayler
 By BjK, Deputy
 DOCUMENT NO. 311163

Statement of Evidence:

Northeast Corner Section 34, Township 141
North, Range 28 West, Cass County, Minnesota

V-17 141-28

Bk.7 Pg.7

1874 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 28 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Poplar North 40 degrees East a distance of 17 links; a 6 inch Fir South 45 degrees East a distance of 28 links; a 7 inch White Pine South 33 degrees West a distance of 26 links; and a 4 inch Poplar North 11 degrees West a distance of 16 links.

1918 U.S. General Land Office dependant resurvey found the corner marked by decayed wood stake, which fits with original topography calls in the area. A 2 by 36 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 10 inch Norway Pine South 80 and 1/2 degrees West a distance of 331 links.

1963 George Claydon records plat of AUDITORS PLAT OF LONGVILLE. Said plat being mathematically tied to 1918 General Land Office corner.

1986 U.S. Forest Service records show the following: USFS technicians and Cass County Survey technicians find a 2 inch by 36 inch iron without cap under pile of field stone. This iron was found from traverse information provided from Gary Stevenson, Licensed Land Surveyor Number 12684 using computations derived from 1918 General Land Office survey. A 2 inch by 48 inch iron pipe with bronze tablet was set over iron in mound of stone.

1988 on June 16 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 2 inch brass cap monument up 1.3 feet in pile of rock, as set in 1986, stamped monument with RLS Number 12684. New bearing trees were marked as shown and steel sign post is in place as noted on front of this certificate.