

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter                      Corner of Section 30, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

Latitude: 47° 00' 31.219"  
Longitude: 94° 23' 45.889"

On                      found a                       
DATE


left monument as found,  lowered monument,  removed monument (explain)

On 12/8/88 placed a 2 inch by 54 inch iron pipe with brass cap.  
DATE

Magnetic Decl: 5° East  
Not to Scale

### SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

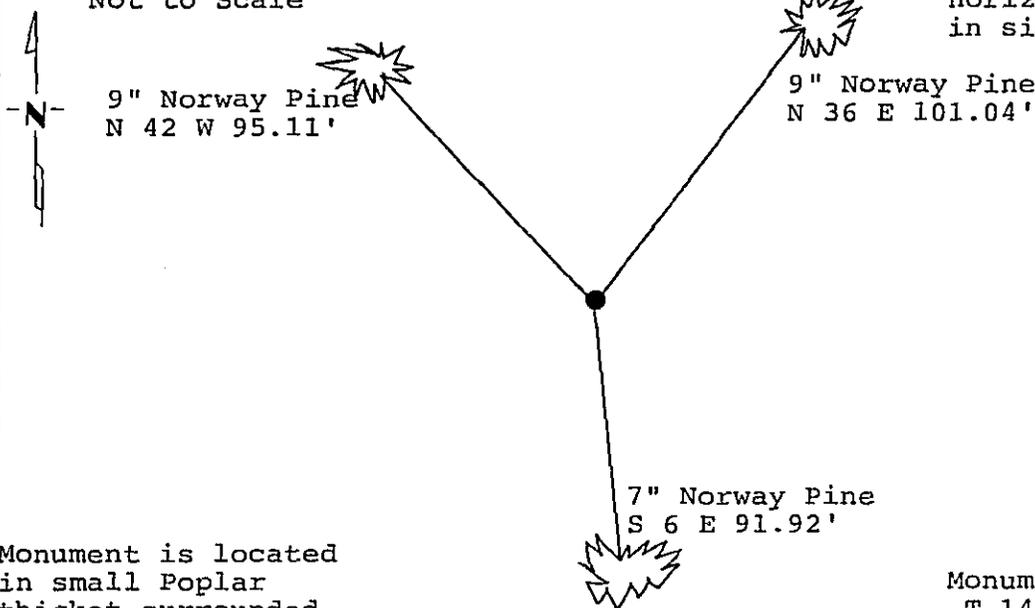

Monument is located in small Poplar thicket surrounded by Norway Pine plantation 425 feet, more or less, easterly of "Y" in trail. 8' Sign post North 3.0' All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped  
T 141 N R 29 W  
S 19  
1/2 S 30  
1988  
RLS 17008

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
David S. Landecker

Date 3/31/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 11:50 A.M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor  
By Bjk, Deputy  
DOCUMENT NO. 311168

Statement of Evidence:

North Quarter Corner Section 30, Township 141  
North, Range 29 West, Cass County, Minnesota

R-3 141-29  
Bk.6 Pg.7

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch White Oak South 53 degrees East a distance of 18 links; and a 12 inch Elm North 30 degrees East a distance of 17 links.

1964 U.S. Forest Service records show the following: technician Ekstrom found no evidence of original bearing trees.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 6 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of original post or bearing trees, whole area sheared off with rows of debris in the area.

1988 on December 8 a Landecker-Stevenson & Associates crew set a 2 inch by 54 inch iron pipe with brass cap, plastic base and magnet at the lost proportion position between the Northwest and Northeast corners of Section 30. New bearing trees were marked as shown and steel sign post was set as noted on front of this certificate.