

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 32, Township 141N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 35.973"
 Longitude: 94° 21' 54.176"


On 6/28/88 found a 2" iron monument with a brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree

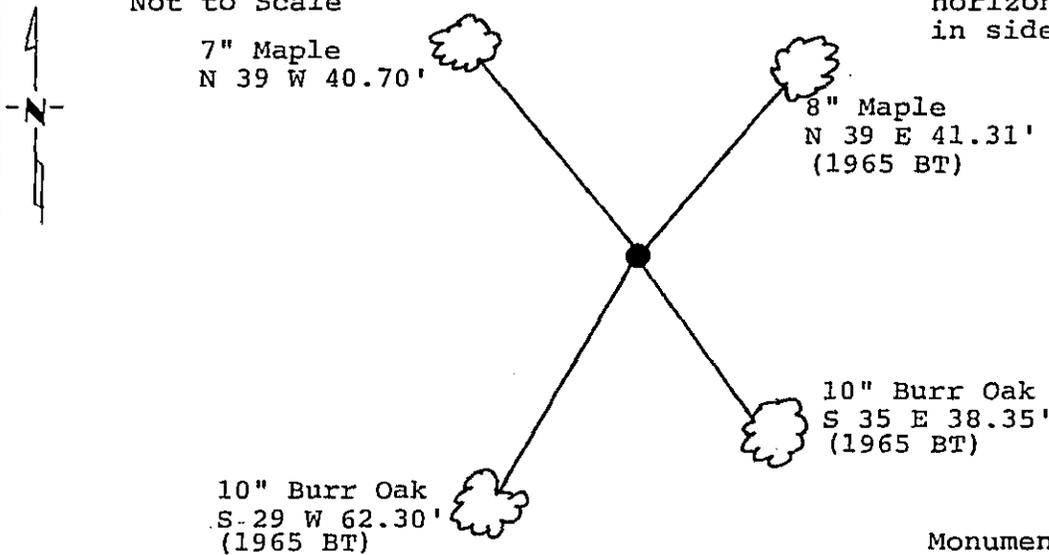

Monument Stamped

T 141 N	R 29 W
S 29	S 28
S 32	S 33

Monument is located
 100' more or less north
 and 230' more or less west
 of Moccasin Lake on
 hilltop
 6' sign post west 8.35'
 8' sign post east 5.0'

All trees are painted
 with red enamel and
 marked with a 54-3
 (bearing tree) tag.

1965

RLS 6807

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/31/89 Registration No. 17008

311173

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:15 P.M. on the 3rd day of April AD, 1989

County Recorder Claudine Kaylow
 By BJK, Deputy

DOCUMENT NO. 311173

Statement of Evidence:

Northeast Corner Section 32, Township 141
North, Range 29 West, Cass County, Minnesota

V-9 141-29
Bk.6 Pg.12

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch Maple North 46 degrees East a distance of 27 links; a 7 inch Oak North 48 degrees West a distance of 13 links; a 7 inch Oak South 71 degrees West a distance of 13 links; and a 6 inch Oak South 78 degrees East a distance of 11 links.

1965 U.S. Forest Service records show the following: found a 1 and 1/2 inch iron pipe, reported to be a good corner. Set a 2 inch by 5 foot iron pipe with bronze tablet and 6 foot sign post West 8.3 feet and marked the following bearing trees: an 8 inch Oak North 82 degrees West a distance of 20.0 feet; an 8 inch Oak South 29 degrees West a distance of 62.6 feet; a 9 inch Oak South 35 degrees East a distance of 38.5 feet; and a 4 inch Maple North 39 degrees East a distance of 41.4 feet.

1973 Myron Landecker, Registered Land Surveyor Number 7452 uses corner to survey plat of ONDARKOS ACRES of record. In his research, he notes that the corner pipe found in 1965 by USFS is a perpetuation of the original as established by William J. Spain, Jr., Licensed Land Surveyor. This as stated by Spain to Landecker.

1980 Walt Curo, Registered Land Surveyor Number 11395, uses corner to survey plat of MOCCASIN BAY of record.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-B-219. This target allowed for the search and location of this corner. The 1965 Northwest bearing trees was cut off.

1988 on June 28 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: the U.S. Forest Service brass cap monument with a 1 and 1/2 inch iron pipe alongside. Three of the 1965 bearing trees are shown on front of this certificate. A new bearing tree was marked as shown and steel sign posts are in place as noted on front of this certificate.