

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Number 18 Meander Corner of Sections 32/33 Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 16.472"
Longitude: 94° 21' 54.278"

On 1/27/89 found a remains of the original Southeast Pine stump
DATE

left monument as found, lowered monument, removed monument (explain)


On 3/15/89 placed a 2" by 48" iron pipe with brass cap and
DATE
plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.



Mocassin Lake

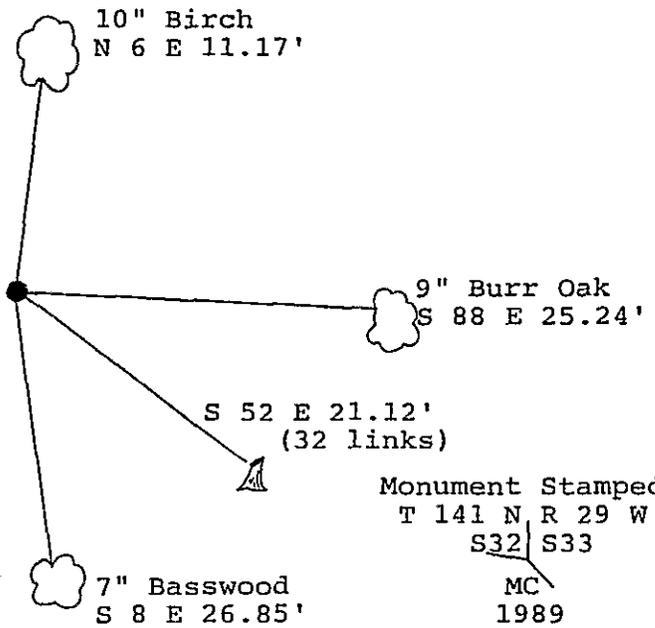

Monument is located 25'± Easterly of waters edge, at bottom of steep bank northeasterly. 8' steel sign post South 4.0' All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Monument Stamped
T 141 N R 29 W
S32 | S33
MC
1989
RLS 17008

Statement of evidence relative to this corner location is on back of page.

311848

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.
David S. Landecker
Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass
I hereby certify that this document was filed in the Co. Recorders office at 3:56 P. on the 3 day of May A.D., 1989
County Recorder Clonnie Kayler
By MS, Deputy
DOCUMENT NO. 311848

Statement of Evidence:

Meander Corner Number 18 Section 32, Township 141
North, Range 29 West, Cass County, Minnesota

WX-9 141-29
Bk.6 Pg.30

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 18 inch White Pine South 52 degrees East a distance of 32 links; and a 12 inch White Pine North 10 degrees West a distance of 23 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1989 on January 27 and 30 a Landecker-Stevenson & Associates crew found remains of the original Southeast Pine stump and reestablish the corner position from the stump. This position was also reconstructed from the original meander notes and the existing shore line.

1989 on March 15 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet at the original bearing and distance from the Southeast Pine stump remains. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.