

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 15, Township 139 N., Range 26 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 01-28-1988 found a GLO bearing tree stump
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 01-28-1988 placed a 1 1/4" X 1 1/4" X 20" perforated steel tube
DATE with an aluminum cap, stamped "DNR SURVEY MARKFR", up 0.5'.

SKETCH OF REFERENCE TIES

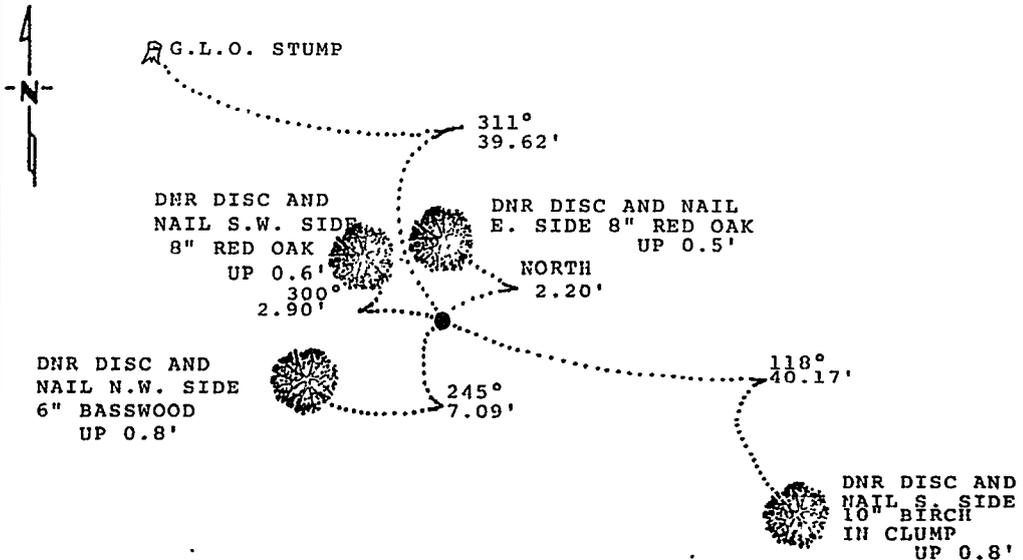

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

D.D.S. 4-4-88
FILE F-761

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-14-89
SIGNATURE DATE

Registration No. 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

312 280

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:00 P.M. on the 22 day of May, A.D., 1989

County Recorder Christine Kayler

By MS, Deputy

DOCUMENT NO. 312 280

North Quarter Corner Section 15, Township 139 North, Range 26 West

The following offices were contacted for information concerning this corner:

MN Secretary of State
Cass County Surveyor
Mn/DNR Washburn Forestry Station

- 1863 This corner was established by the U.S. General Land Office, marked with a wood post and witnessed by two bearing trees:
14" Yellow Pine, N. 49° W., 60 links (39.60 feet)
15" White Pine, S. 30° E., 20 links (13.20 feet)
- 1909 John Curo, Surveyor, found stumps of both B.T.'s and set corner.
- 1988 The DNR Bureau of Engineering found a 20" pine stump, up 2 feet, with ax marks on the southeast side of a partly healed over blaze. The stump was identified as the remains of the original northwest B.T.

The corner was re-established using recorded bearing and distance from the B.T. stump. A DNR Survey Marker was set to perpetuate the corner location.