


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 18, Township 140, Range 31, 5th P.M.
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 11/20/89 found a 1 1/2-inch iron pipe and original Northwest bearing tree stump.
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of trees.
Not to Scale

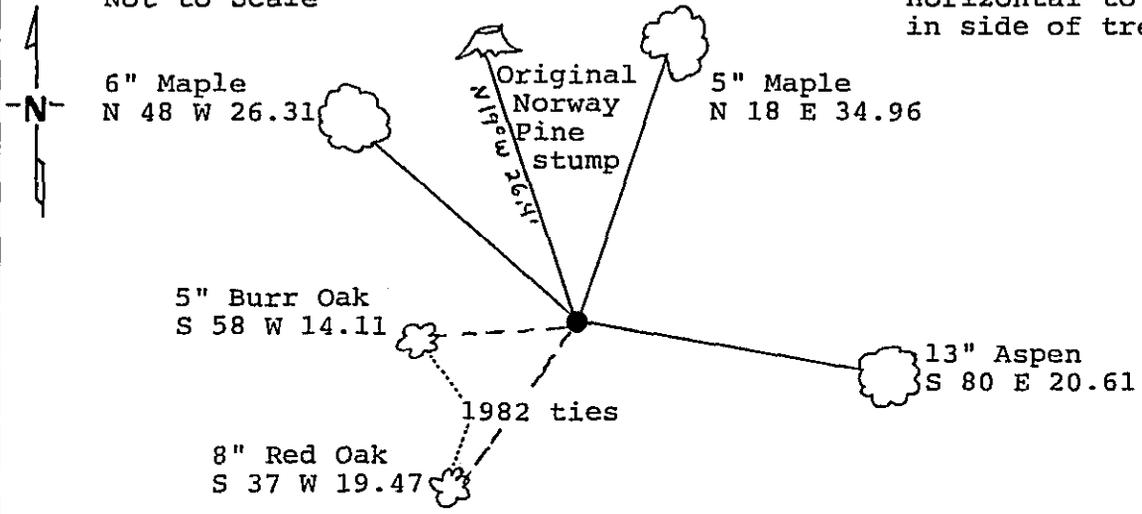

Corner is on an easterly facing slope
230'± West-Southwest of Snoway 1 Trail.
7' Steel sign post set East 2.0'

All bearing trees have 1 6d nail in base of trees and bearing tree tags on front and back.

Statement of evidence relative to this corner location is on back of page. 317226

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 11/29/89
SIGNATURE DATE

Registration No. 17008

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:30 P. M. on the 7 day of Dec. A.D., 1989

Register of Deeds Clondine Kayler
By MS Deputy

DOCUMENT NO. 317226

Northeast Corner, Section 18, Township 140
North, Range 31 West, Cass County, Minnesota

- 1870 T.B. Walker, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 140 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 10 inch Aspen North 35 degrees East a distance of 10 links; a 4 inch Sp. Pine South 45 degrees East a distance of 15 links; a 6 inch Sp. Pine South 55 degrees West a distance of 22 links; and a 10 inch Norway Pine North 19 degrees West a distance of 40 links.
- 1982 Cass County Survey Technician, Terry Freeman and County Forester, Larry Olson find 1 and 1/2 inch iron pipe in place up 1.3 feet. They mark the following bearing trees: a 4 inch Burr Oak South 74 degrees West a distance of 14 feet; and a 7 inch Red Oak South 37 degrees West a distance of 19.2 feet.
- 1989 On November 20, a Landecker-Stevenson & Associates, Inc., survey crew found the 1 and 1/4 inch iron pipe up 15 inches, the original Northwest Norway Pine bearing tree stump at distance and bearing which checks well with the 1870 original calls, and both County 1982 bearing trees. New bearing trees were marked as shown. A 7 foot steel sign post was set as noted on front of this certificate.