

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 10, Township 133N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 10/15/86 placed a 2"x 18" telespar with aluminum cap
DATE
down 10" in centerline east to west road in line with fence south.

SKETCH OF REFERENCE TIES

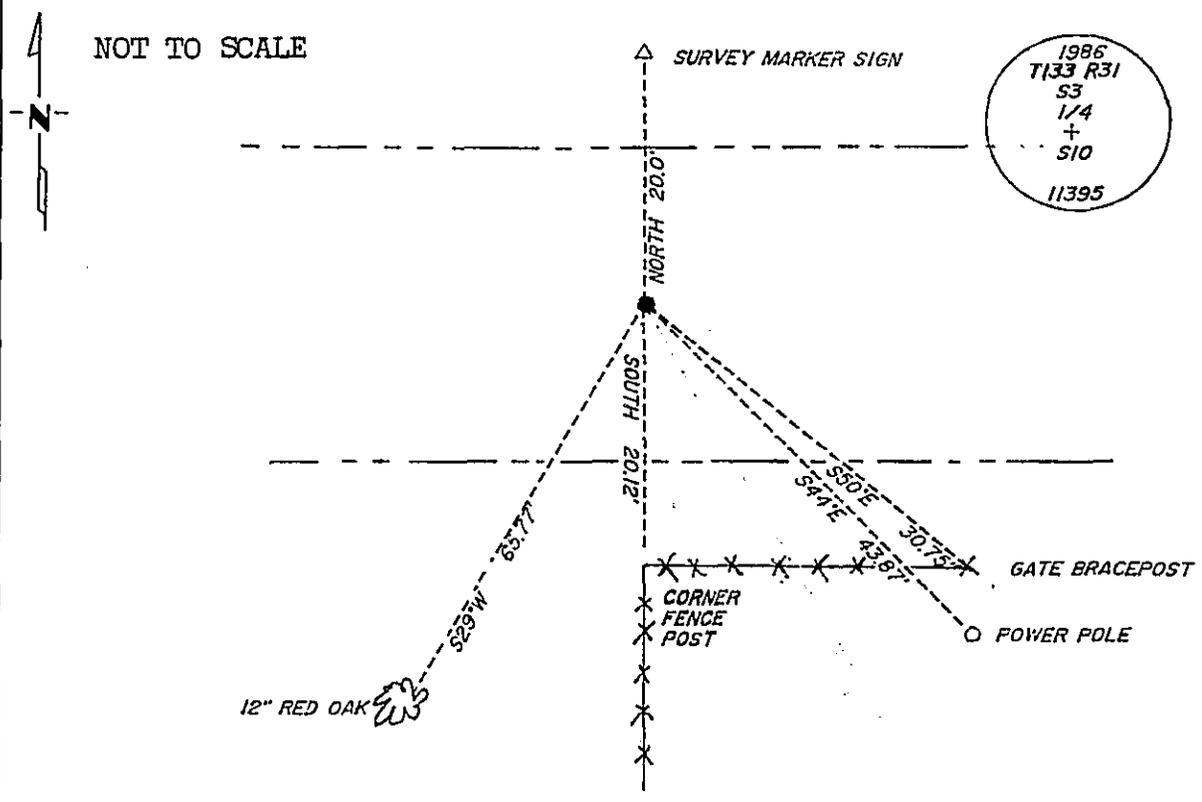

Statement of evidence relative to this corner location is on back of page. 317965

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Carr 1-22-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:15 P. on the 22 day of January A.D., 19 90

County Recorder Clairine Kayler
By M.S., Deputy

DOCUMENT NO. 317965

Statement of Evidence:

E-15

North Quarter Corner, Section 10, T.133N., R.31W., 5th P.M.

- 1863 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 7" Aspen S55W 15 links and an 8" Aspen N18E 8 links.
- 1986 On May 19, Terry Freeman of the Cass County Surveyors Office and backhoe operator Glen Williams dug in the area of the east to west road and the fence south. They dug an area 9' north to south by 14' east to west by 2' deep.
- 1986 On October 15, Terry Freeman placed a 2"x 18" telespar with an aluminum cap down 10" in the centerline of the east to west road in line with a fence to the south.