


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 1, Township 142N, Range 26W, 5th P.M.
 STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 1-17-1990 found a 2" X 60" bronze capped monument
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

Monument Marked



SKETCH OF REFERENCE TIES
 not to scale

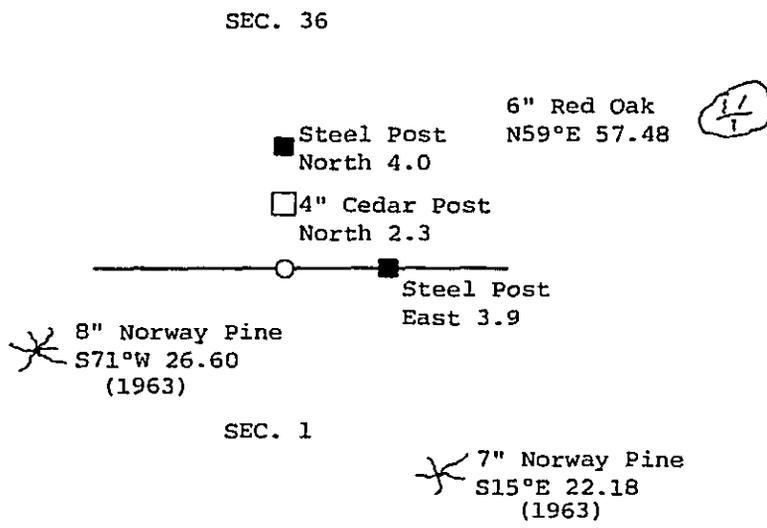

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.
 bearings are true

Statement of evidence relative to this corner location is on back of page. 319603

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Clapp
 Date 3/20/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:05 A...M. on the 12 day of April A.D., 19 90
 County Recorder Claudia Kayler
 By M.S., Deputy
 DOCUMENT NO. 319603

Statement of Evidence:

Z23 South quarter corner section 36

1/4 Cor. 1 and 36 (S 1/4 Cor. Sec. 36)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Birch 8" S 68 degrees E, 20 Links (13.20 feet)
White Pine 8" N 25 degrees W, 17 Links (11.22 feet)
- 1937 J.A. Gjelhaug, USFS, notes state no trees, heavy burn, he set a 1.5" diameter iron pipe (notes are unclear as to how he established this position).
- 1963 W. Okerman, U.S.F.S. found 1.5" diameter iron pipe, replaced with 2" X 60" iron pipe with brass cap and the following references:
Red Pine 5" S 15 degrees E, 22.2 feet
Red Pine 7" S 71 degrees W, 26.8 feet
Cedar Post 4"x4" North, 2.3 feet
An affidavit as to location of Government corner was filed for record in the office of the Cass County Records Office from the above information by William H. Okerman, RLS, on October 20, 1964.
- 1-17-1990 Personnel from Kovanen & Osufsen Inc. found U.S.F.S. monument in good condition and U.S.F.S. witnesses, added spike and painted;
Red Pine 7" S 15 degrees E, 22.18 feet
Red Pine 8" S 71 degrees W, 26.60 feet
Cedar Post 4"x4" North, 2.3 feet
also found;
Red Oak 6" N 59 degrees E, 57.48 feet
we added the following witnesses:
Set 8' long steel sign post with sign attached, North 4.0 feet
Set 8' long steel sign post with sign attached, East 3.9 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.