

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WC Meander Corner of Section 5, Township 142N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass, West side of Taylor Lake


At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 10-2-1990 placed a 2" X 48" brass capped monument on an 8' steel fence  
DATE \_\_\_\_\_  
post.

Monument Marked

T143N R26W  
WCMC  
20' WEST OF MC  
S 32  
S 5  
T142N  
1990  
RLS 17767

### SKETCH OF REFERENCE TIES Not to Scale

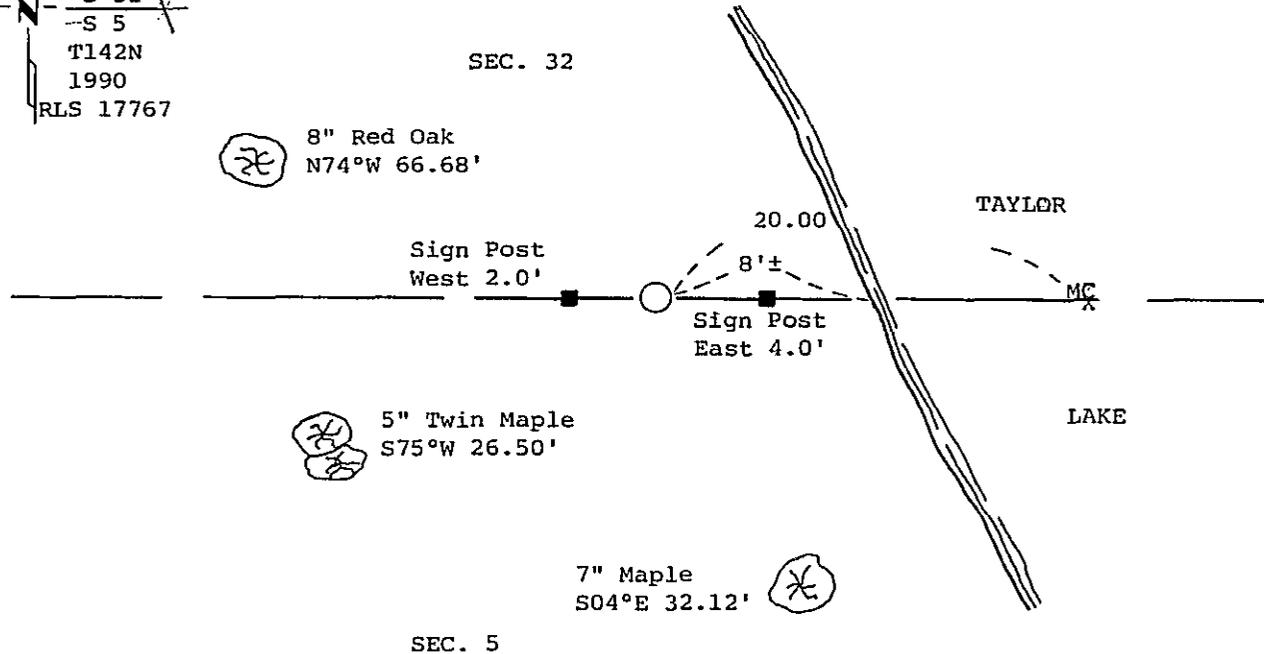

Bearings are true.

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325469

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Cooper

Date 12/05/90 Registration No. 17767

#### OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:30 P.M. on the 10 day of December A.D., 1990

County Recorder Claudia Kaylor

By MJ, Deputy

DOCUMENT NO. 325469

Statement of Evidence:

A6,7 Meander corner section 32

Meander Cor. 5 and 32 (MC Sec. 32)

- 1872 U.S. General Land Office survey set wood post for corner and the following reference was noted:  
Birch 10" N 80 degrees W, 50 Links (33.00 feet)
- 11-20-1963 W. Okerman, USFS, chained to area from centerline of Highway to West, no evidence of corner or BT was found.
- 11-1-1985 USFS personnel, traverse to area, no evidence of corner or BT was found.
- 11-20-1990 Personnel from Kovanen & Osufsen Inc. chain to area from Section corner to West, no evidence of corner or BT was found.
- 10-2-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 48" brass capped monument on top of an 8 foot steel fence post as a witness corner to the meander corner position which was established at record distance and on line between the recovered Southwest corner and South Quarter corner of Section 32 and witness the witness corner as follows:  
Red Oak 8" N 74 degrees W, 66.68 feet  
Twin Maple 5" S 75 degrees W, 26.50 feet  
Maple 7" S 04 degrees E, 32.12 feet  
Set 8' long steel sign post with sign attached, West 2.0 feet  
Set 8' long steel sign post with sign attached, East 4.0 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.