

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest Corner of Section 6, Township 142, Range 31, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 1/19/91 found a 3 inch General Land Office iron pipe with marked <sup>DATE</sup> brass cap and 1919 General Land Office bearing tree SW
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
Not to Scale

All distances are horizontal to nail in side of tree

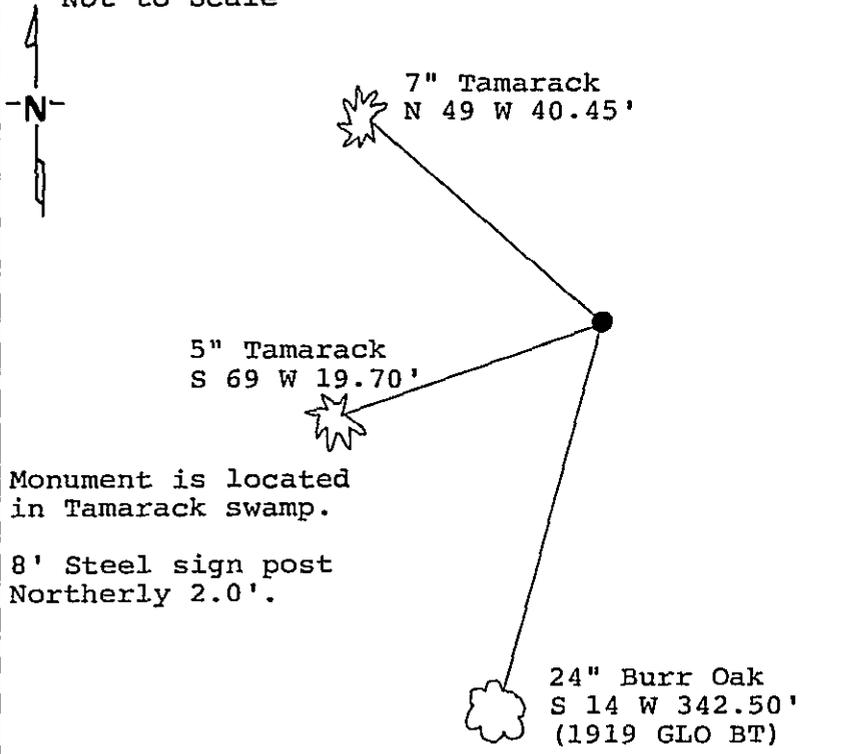

Monument Stamped  
T143N  
R32W S36 | S31 R31W  
S 1 | S 6  
T142N  
1919

Monument is located in Tamarack swamp.

8' Steel sign post Northerly 2.0'.

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 327264

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Arnold A. Leckel 3/6/91  
SIGNATURE DATE

Registration No. 17008

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:05 P. M. on the 11 day of March A.D., 1991

Register of Deeds Clondine Kogler  
By MJ Deputy

DOCUMENT NO. 327264

Northwest corner, Section 6, Township 142 North, Range  
31 West, Cass County, Minnesota

A-1 142-31

1871 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the West line of Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Tamarack South 40 degrees East a distance of 35 links; an 8 inch Tamarack North 75 degrees East a distance of 19 links; an 8 inch Tamarack North 43 degrees West a distance of 45 links; and a 7 inch Tamarack South 72 degrees West a distance of 36 links.

1915 Cass County Surveyor's Office records on microfilm roll 11 S, Book 81, page 26 show a survey by Molyneux. The notes indicate that he found the corner and set an iron monument on top of 6 foot Tamarack piling. The notes do not indicate that any bearing trees were marked.

1919 U.S. General Land Office dependent resurvey found the corner marked by a 2 and 1/2 inch galvanized iron pipe and remains of all four original bearing trees. A 3 inch by 36 inch iron pipe with brass cap was set alongside iron. The following bearing trees were marked: an 8 inch White Pine North 38 and 1/2 degrees East a distance of 450 links; an 8 inch White Oak South 14 and 1/2 degrees West a distance of 519 links; a 4 inch Aspen North 27 and 1/2 degrees West a distance of 407 links.

1931 Hubbard County Surveyor's Office Record Book B, page 213 show a survey by A.R. Taubman, County Engineer. He found a U.S. Land Survey iron at the Northeast corner of Section 1, Township 142 North, Range 32 West. Taubman does not give any additional information about the corner.

1982 The Hubbard County Survey Office find a County iron monument up 3 feet as set by a County Surveyor and found by the U.S. General Land Office in 1919. They did not find the GLO iron, but found the Southwest 1919 bearing tree. Brian Mills, Registered Land Surveyor Number 13798 filed a Certificate of Government Corner in Hubbard County, recorded as Document number 172966.

1991 on January 5, United States Forest Service personnel found corner and tie into traverse.

1991 on January 19, a Landecker and Associates, Inc., survey crew found corner in good shape in Tamarack swamp up 6 inches with County monument alongside northwesterly .55 feet. Also found two bearing trees as marked by the USFS and the 1919 GLO bearing tree South 14 degrees West a distance of 342.50 feet, now a 24 inch tree. A steel sign post was set as noted on front of this certificate. Landecker and Associates, Inc. accepts the GLO brass cap monument as a perpetuation of the original corner position.