

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner

Number 27 Corner of Section 6, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:



On 1/19/91 found a spike set by United States Forest Service from  
DATE  
stumps of both original bearing trees

left monument as found,  lowered monument,  removed monument (explain)

On 1/19/91 placed a 2 inch by 48 inch iron pipe with brass cap  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree

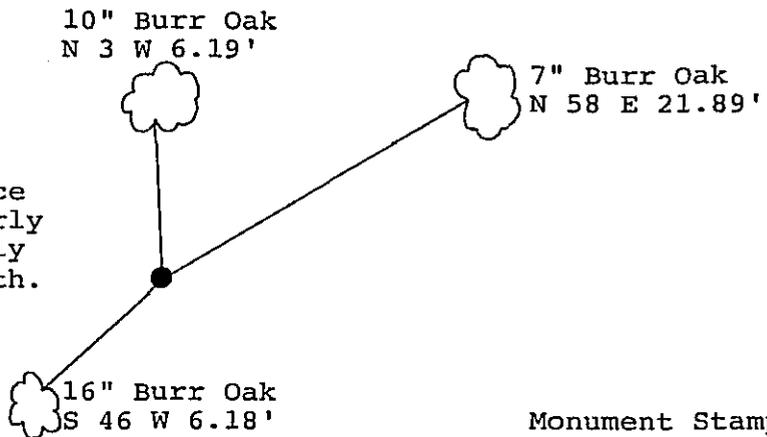

Monument is located on ice ridge between bog northerly and Kabekona Bay southerly 20'± north of bog to south. 8' Steel sign post Northerly 2.0'.

Monument Stamped  
 T142N  
 R32W | R31W  
 S 1+S 6  
 MC  
 1991  
 RLS 17008

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 327265

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 3/6/91  
 SIGNATURE DATE

Registration No. 17008

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:10 P. .M. on the 11 day of March A.D., 19 91

Register of Deeds Claudia Kayler  
 By h Deputy

DOCUMENT NO. 327265

Meander corner number 27, Section 6, Township 142 North,  
Range 31 West, Cass County, Minnesota

BC-1 142-31

1871 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the West line of Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Yellow Pine North 50 degrees East a distance of 22 links; and an 8 inch Yellow Pine North 58 degrees West a distance of 30 links.

1915 Cass County Surveyor's Office records on microfilm roll 11 S, Book 81, page 26 show a survey by Molyneux. The notes indicate that he found the corner. The notes do not indicate that any bearing trees were marked.

1989 on May 10, United States Forest Service personnel, Krause and Brama, find original Pine stumps at bearing and distance and set 60d spike for corner.

1991 on January 19, a Landecker and Associates, Inc., survey crew set a 2 inch by 48 inch iron pipe with brass cap in place of spike set by USFS from stumps of both original bearing trees. Monument was left up 12 inches and evidence of original Pine stumps were present. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate. Landecker & Associates, Inc. set this corner in the obliterated position of the original corner.