

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 29, Township 141, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 11/23/92 placed a 2 inch by 48 inch iron monument with brass
DATE
cap up 15 inches.

Magnetic Decl: 5° East
Not to Scale


SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.



Monument Stamped:
T141N R31W
S29+S28
1992
RLS 21367

Monument is located at east edge of Aspen regeneration and 100'± southwest of southwest end of small pond.
8' steel sign post West 2.62'.
8' steel sign post N 45 E 6.63'.

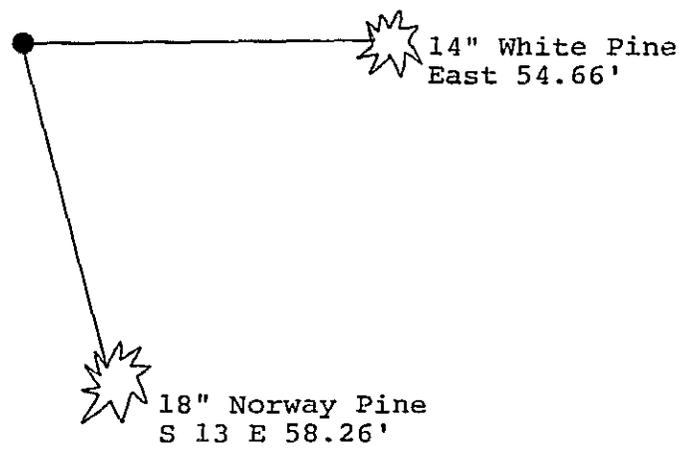

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 343563

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
Terry L. Freeman
Date 12/8/92 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:40 P.M. on the 8 day of December A.D., 1992

County Recorder Claudia Kayler
By ms, Deputy
DOCUMENT NO. 343563

Statement of Evidence:

East Quarter corner, Section 29, Township
141 North, Range 31 West, Cass County,
Minnesota

T-9

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 31 West. The notes indicate that he set a wood post and marked the following bearing trees: a 9 inch Birch South 17 degrees East a distance of 44 links (29.04 feet); and a 5 inch Birch North 70 degrees West a distance of 38 links (25.08 feet).

1962 on September 18, United States Forest Service notes for Township 141 North, Range 31 West, in Book 1, page 71, show search by R.H. McDonald. The notes indicate that he did not find any evidence of the original corner.

1973 on September 20, United States Forest Service notes indicate that United States Forest Service employees, C.K. and L.W. placed a Forest Service Location Poster on an 18 inch Norway Pine that states "approximate corner North 9 degrees East a distance of 40 feet".

1992 on October 13, a Landecker & Associates of Walker, Inc., survey crew traverse in area and search for corner. No evidence was found of the corner. They did find the 1973 "approximate corner" tag.

1992 on November 23, a Landecker & Associates of Walker, Inc., survey crew set a 2 inch by 48 inch iron pipe with brass cap up 15 inches at the lost, single proportion position between the Northeast and Southeast corners of Section 29. New bearing trees were marked and steel sign posts set as noted on front of this certificate.