

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 8, Township 145, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10/25/93 found a 1/2" Capped pipe, R.L.S. 15483, above a 1 1/4" Capped
DATE
pipe. Removed 1/2" pipe.
- left monument as found, lowered monument, removed monument (explain)
- On 10/25/93 placed a Mn/DOT Cast Iron Monument above existing 1 1/4" capped
DATE
pipe. Top of monument flush with highway surface.

SKETCH OF REFERENCE TIES

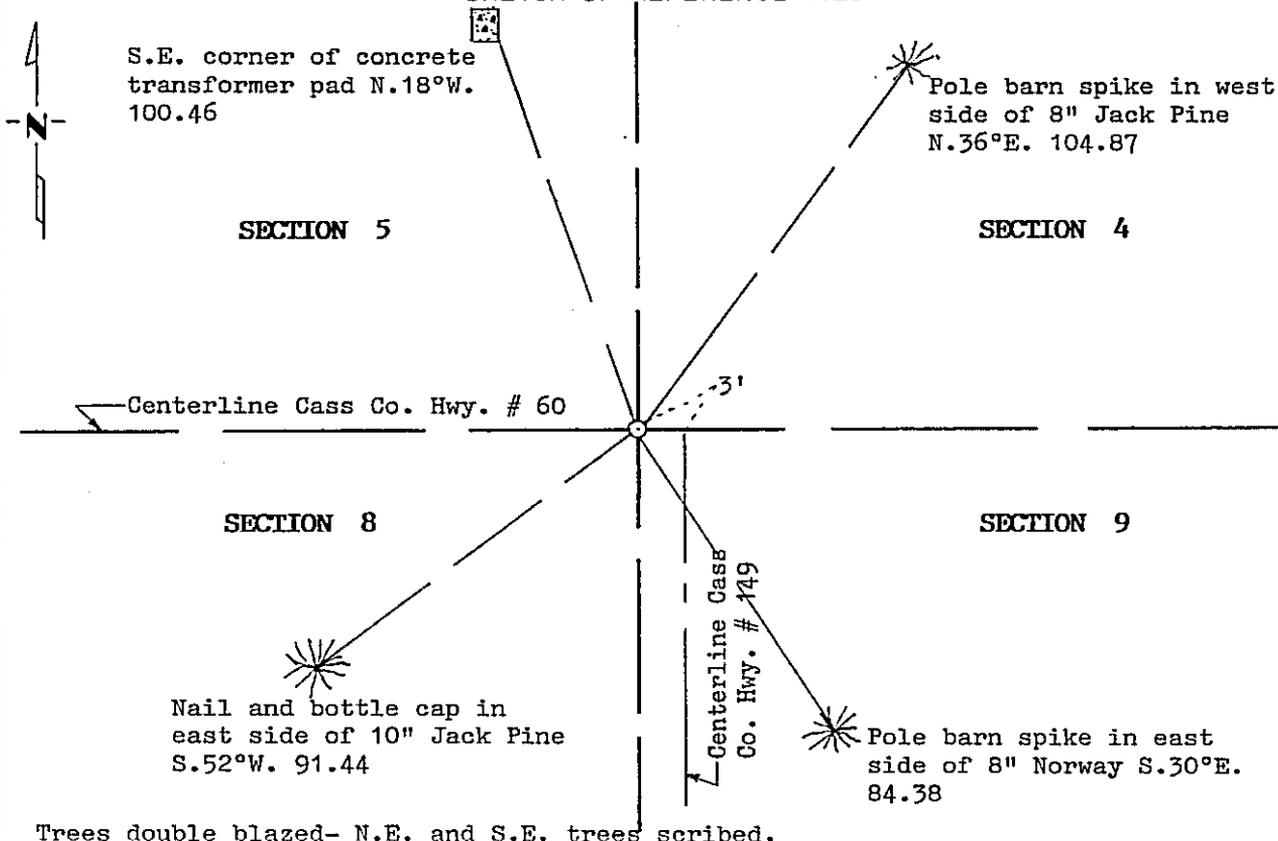

Trees double blazed- N.E. and S.E. trees scribed.

Statement of evidence relative to this corner location is on back of page.

357109

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Robert W. Murray SIGNATURE 3-28-94 DATE

Registration No. 15483
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 11:40 A. .M. on the 26th day of APRIL A.D., 19 94

County Recorder Claudine Kaylar
 By N.S. MICROFILM, Deputy
 DOCUMENT NO. 357109

Statement of Evidence:

**NORTHEAST CORNER SECTION 8, TOWNSHIP 145 NORTH,
RANGE 31 WEST, FIFTH PRINCIPAL MERIDIAN**

- 1875** The original Public Land Survey was run by Benjamin C. Baldwin. A scribed post was set to mark corner and witness ties were recorded:
- 8" Jack Pine N. 64^o E. 27 links
 - 8" Jack Pine N. 70^o W. 24 links
 - 6" Jack Pine S. 6^o W. 44 links
 - 6" Jack Pine S. 67^o W. 31 links
- 1906** John Curo found corner and set additional bearing trees. (Survey Record Book A, page 274-275)
- 14" Jack Pine N. 57^o15' E, 20 feet
 - 14" Jack Pine S. 77^o30' W. 35 feet
- 1910** James Middleton found hub set in place of government stake and remains of original government bearing trees. (Survey Record Book B, page 575)
- 1912** Harry S. Todd found corner set by Middleton and stumps of all four government bearing trees and set new witness ties:
(Survey Record Book B, pages 310-311)
- 12" Jack Pine Stp S. 70^o E. 20.25 feet
 - 15" Stump S. 72^o W. 34.60 feet
 - 15" Jack Pine Stp N. 65^o E. 50.66 feet
- 1913** John Curo found three old bearing tree stumps and two of Curo's bearing trees. He set 1 1/2" x 48" galv. capped iron pipe for corner. (Survey Record Book D, page 152)
- 1915** John Curo found monument set in 1913. (County Resurvey Plat E-67)
- 1992** Murray Surveying, Inc., found 1 1/2" capped down below road surface and accepted iron pipe for section corner and placed MNDOT monument above existing iron pipe.

For information regarding this survey, contact Murray Surveying, Inc., Bemidji, MN.