

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 20, Township 145, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 10/28/93 found a 3/4" Capped pipe, R.L.S. 6807 under bituminous.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10/28/93 placed a Mn/DOT Cast Iron Monument. Top of monument flush  
DATE with highway surface.

### SKETCH OF REFERENCE TIES

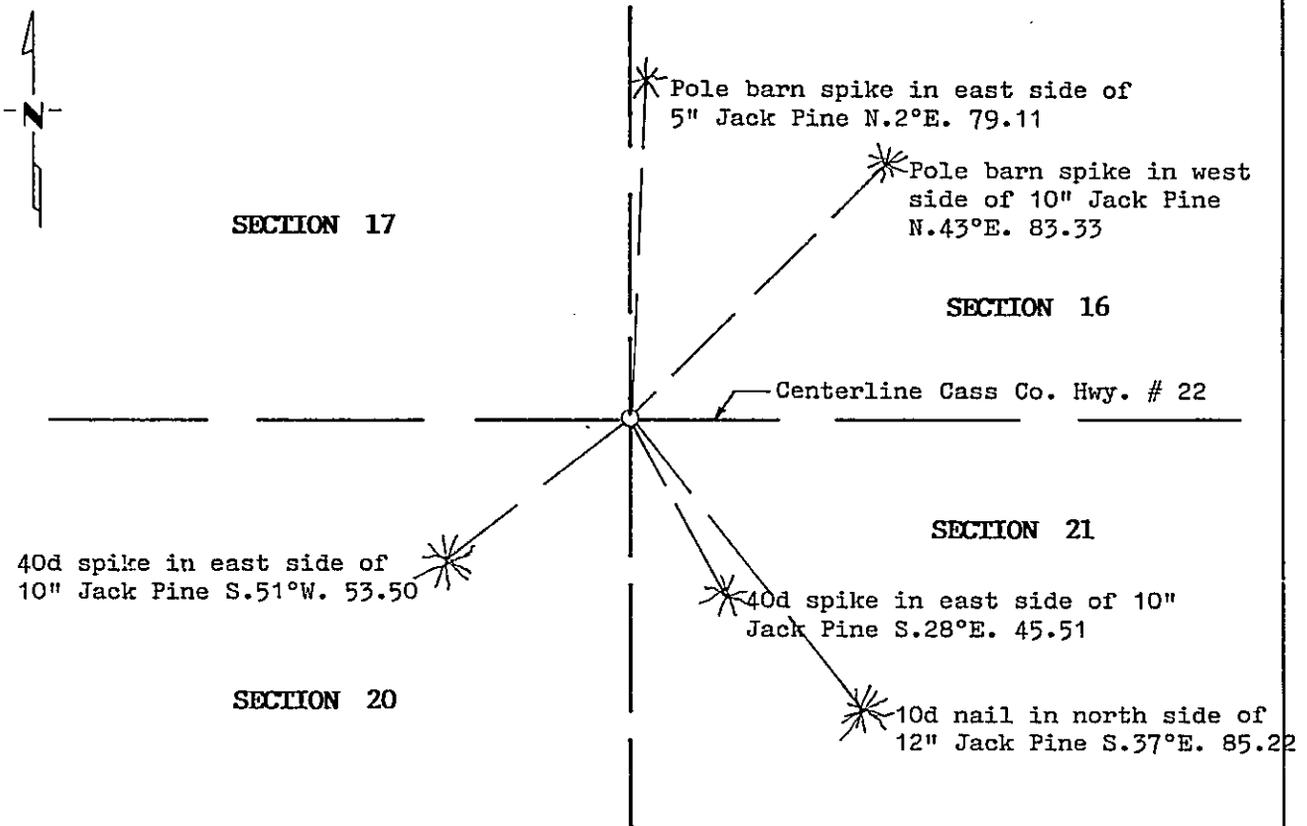

Statement of evidence relative to this corner location is on back of page.

357130

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Robert W. Murray

Date 3-28-94 Registration No. 15483

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 3:10 P. .M. on the 26th day of APRIL A.D., 19 94

County Recorder Claudine Kaylor  
By N.A. AMERICAN, Deputy

DOCUMENT NO. 357130

Statement of Evidence:

**NORTHEAST CORNER SECTION 20, TOWNSHIP 145 NORTH,  
RANGE 31 WEST, FIFTH PRINCIPAL MERIDIAN**

**1875** The original Public Land Survey was run by Benjamin C. Baldwin. A scribed post was set to mark corner and witness ties were recorded:

20" Norway Pine S. 80° E. 38 links  
20" Norway Pine N. 53° E. 77 links  
16" Norway Pine S. 37° W. 46 links  
20" Norway Pine N. 12° W. 40 links

**1910** James Middleton found hub set from stumps of original government bearing trees and made additional witness ties: ( Survey Record Book B, page 576 )

15" Norway Pine Stump N. 31°45' E. 61.70 feet  
14" Norway Pine Stump S. 48°45' E. 75.64 feet  
18" Norway Pine Stump N. 86°51' W. 68.28 feet  
9" Jack Pine S. 38°36' W. 95.60 feet

**1963** Jack Salo, RLS, indicates setting a spike for corner and witness ties.

7" Jack Pine Northwest 64.60 feet  
8" Jack Pine Southwest 71.85 feet  
Jack Pine Southeast 34.36 feet

**1982** Okerman Surveying, Inc., found spike under road surface and 1910 bearing tree with rail road spike and set 3/4 " capped iron pipe for corner and the following witness ties.

8" Jack Pine N. 2° E. 64.78 feet  
8" Jack Pine S. 36° E. 85.22 feet  
4" Jack Pine S. 51° W. 53.48 feet

**1992** Murray Surveying, Inc., found 3/4 " capped iron pipe RLS 6807 and the southwest and southeast Okerman bearing trees. Accepted found monument as northeast corner of Section 20.

For information regarding this survey, contact Murray Surveying, Inc., Bemidji, MN.