

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 28, Township 141, Range 27, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/4/94 placed a 2 inch by 24 inch iron pipe with brass cap
DATE
over an 8 foot steel sign post, up 20 inches.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

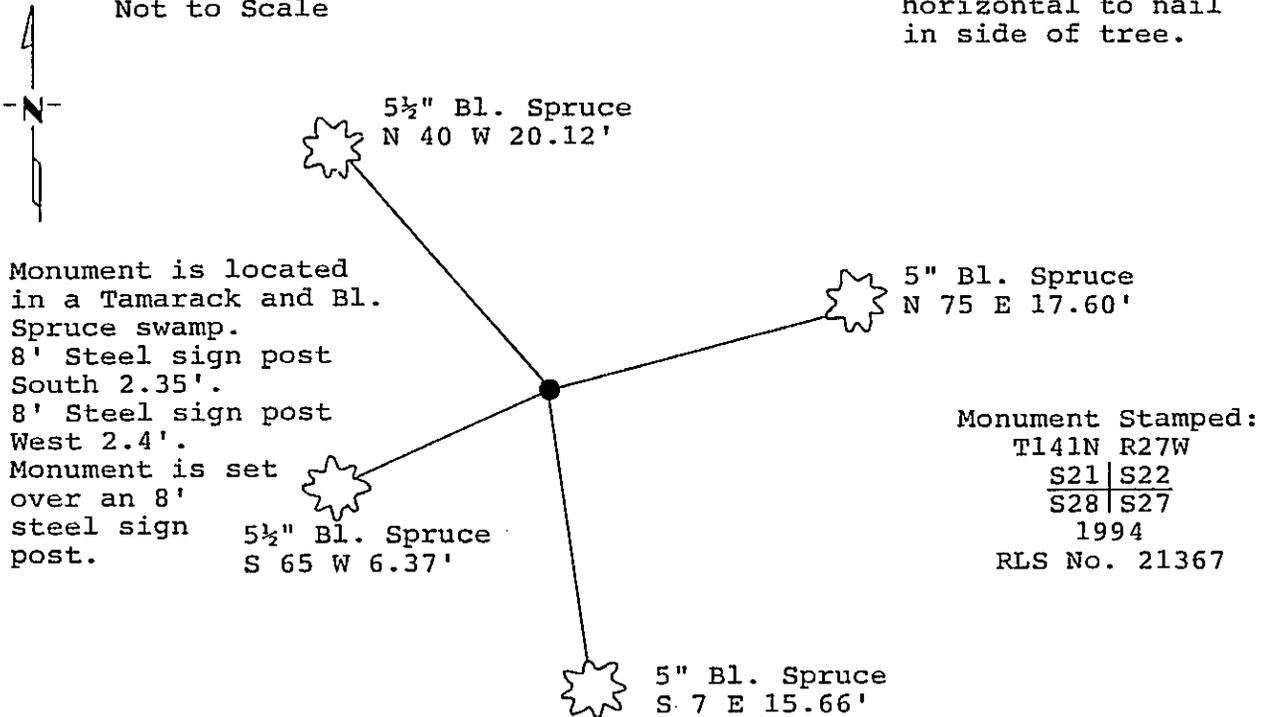

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

357305

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 Terry L. Freeman
 Date 5/4/94 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 9:10 A.M. on the 4th day of MAY A.D., 1994

County Recorder Claudine Kaylar
 By N.C. MICROFILM, Deputy

DOCUMENT NO. 357305

Statement of Evidence:

Northeast corner, Section 28, Township 141 North,
Range 27 West, Cass County, Minnesota

R-13

1874 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 27 West. The notes indicate that he set a wood post and marked the following bearing trees: a 6 inch Spruce South 39 degrees East a distance of 27 links (17.82 feet); and a 7 inch Tamarack South 30 degrees West a distance of 23 links (15.18 feet).

1968 United States Forest Service notes for Township 141 North, Range 27 West, in Book 2, Page 61, in United States Forest Service files in Cass Lake, Minnesota, show that technicians chained to this location from evidence found at the quarter corner of Sections 22 and 27. They searched for two man hours and found no evidence of the original corner.

1993 in October, a Landecker & Associates, Inc. survey crew traversed into the area of the corner. The crew searched for the original survey evidence and evidence of other surveys. No tie trees or post could be found. They located the edge of the swamp to the south and east to aid in their search and for computing the obliterated position of the corner.

1994 on March 4, a Landecker & Associates, Inc. survey crew made a final search for the original survey post or ties, and finding nothing, set a 2 inch by 24 inch iron pipe with brass cap over an 8 foot steel sign post. New bearing trees were marked and steel sign posts set as noted on front of this certificate. The corner was set at the obliterated position using the original survey measurements of East 2.0 chains and South 1.0 chains to edge of swamp.