


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner on the east shore of Wilson Lake, common to Sections 24 and 25, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota. In May, 1997, Northern Lights Surveying and Mapping, Inc. set a galvanized steel pipe with a brass cap as a perpetuation of the original General Land Office (G.L.O.) meander corner.


SKETCH OF REFERENCE TIES & EVIDENCE

T.142N., R.26W.



NOT TO SCALE

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

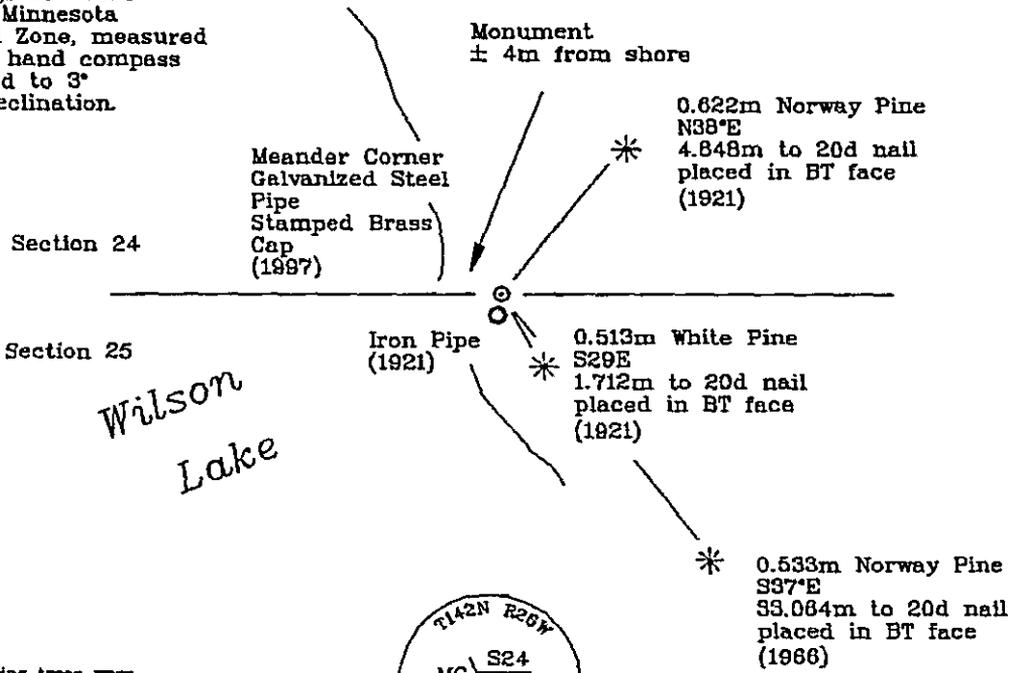

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

395074

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Laverne Leuelling 11-16-97
Date

Registered Land Surveyor No. 18089
NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 4:05 P.M. Date: Dec. 8, 1997

Recorder Claudine Taylor
By K.G. Deputy

DOCUMENT NO. 395074

Statement of Evidence

Meander Corner on the east shore of Wilson Lake, common to Sections 24 and 25, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

November, 1872; General Land Office (G.L.O.) survey notes; Deputy Surveyor E.W. Griffin set a wooden post and established the following references:

8" White Pine (0.203m)	8" Spruce (0.152m)
N52°E	S35°E
5 Links (1.006m)	3 Links (0.804m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1921; Cass County notes Book "C" p. 416; Cass County Surveyor James H. Flynn recovered evidence of a pine stump frozen in ice, scribed "MC S25BT" and marked the following new references:

16" Norway Pine (0.406m)	10" White Pine (0.254m)
N35°E	S45°E
16 Feet (4.877m)	6.0 Feet (1.829m)

1965-66; Survey by R.F. Schneider, Walker, Minnesota; Schneider set an iron pipe using the 1921 ties and established the following additional reference:

16" Norway Pine (0.406m)
S37°E
109.2 Feet (33.284m)

June, 1989; United States Department of Agriculture-Forest Service (U.S.D.A.-F.S.) crew of Gary Brown and Curt Krause found 1.5" diameter iron pipe in good condition, with the 1921 and 1966 references. They placed rocks around the iron pipe (Book #2, p.74).

May, 1997; Joe Foster of Northern Lights Surveying and Mapping, Inc. tied in the 1921 meander corner conventionally. Later in the month, Foster and Mike Sherek returned to the meander corner and found it in good condition. The crew set a 1.219m long, 0.051m diameter galvanized steel pipe with an 0.083 diameter brass cap up 0.430m at the 1921 position; the following references were observed:

0.622m Norway Pine	0.513m White Pine	0.533m Norway Pine
N38°E	S29°E	S37°E
4.848m to 20d nail placed in BT face	1.712m to 20d nail placed in BT face	33.064m to 20d nail placed in BT face

The 1921 iron pipe was placed adjacent to the set meander corner, south side, up 0.170m.

Northern Lights Surveying and Mapping, Inc. Slater Township Field Book #3, p. 27.

Coordinates:

Cass County North

Northing = 62,614.046 meters
Easting = 174,874.406 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 332,609.194 meters
Easting = 825,003.771 meters

Latitude = 47°05'32.14444" North
Longitude = 93°55'14.44838" West