


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Center Quarter of Section 11, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

July, 1997; Northern Lights Surveying and Mapping, Inc. set a Witness Corner to the Center Quarter 197.654m westerly, on line, from the calculated Center Quarter position, with a stamped aluminum rod.


## SKETCH OF REFERENCE TIES & EVIDENCE

T.142N., R.26W.



NOT TO SCALE

Bearings are Grid North Minnesota Central Zone, measured with a hand compass adjusted to 3°E East declination.

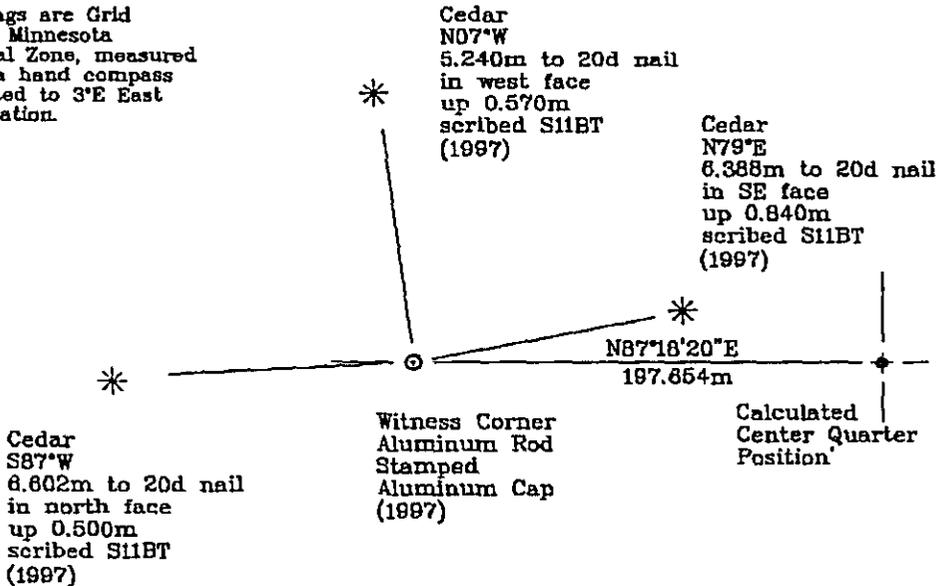

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.



400497

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

*LaVerne Leuelling* 5-20-1998  
 LaVerne Leuelling Date  
 Registered Land Surveyor No. 18089  
 NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 1:30 P.M. Date: June 1st, 1998  
 Recorder Claudine Kaylor  
 By K.F. Deputy  
 DOCUMENT NO. 400497

## Statement of Evidence

Center Quarter of Section 11, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

July, 1936; Arthur H. Jager, Civilian Conservation Corps (C.C.C.) compassman under the United States Department of Agriculture-Forest Service (U.S.D.A.-F.S.) recovered a cedar post scribed "center 1/4 S11" in good condition, with the following references:

14" White Pine (0.356m)	Tamarack Snag
S23°W	S40°E
0.18 chains (3.621m)	0.19 chains (3.822m)

He believed it to be a county established corner. A sketch shows the corner position lying west of a creek.

Form 874-9, U.S.D.A.-F.S.

October, 1963; U.S.D.A.-F.S. T.142N., R.26W. Field Book #3, p.27; Surveyor William Okerman noted that scribing was visible on a White Pine snag.

November, 1996; Northern Lights Surveying and Mapping, Inc. crew of David Anderson and Mike Sherek cruised to, established, and GPS'd two search positions. No evidence of the corner or its accessories was found at this time. The two eccentrics were set at the edge of a cedar swamp, as the center quarter cruise position was unable to be reached due to a beaver flowage with weak ice. An additional search was conducted later in the year, but still no evidence was found.

July, 1997; Joe Foster of Northern Lights Surveying and Mapping, Inc. set a witness corner to the center quarter of Section 11 197.654m westerly, on line, from the position arrived at by calculation the intersection of opposite and corresponding quarter corners of Section 11. He set a 3.658m long, 0.019m diameter aluminum rod with a 0.083m diameter stamped aluminum cap, up 0.210m, from which the following were established:

Cedar	Cedar	Cedar
N07°W	N79°E	S87°W
5.240m to 20d nail	6.388m to 20d nail	6.602m to 20d nail
in west face	in SE face	in north face
up 0.570m	up 0.840m	up 0.500m
scribed S11BT	scribed S11BT	scribed S11BT

Northern Lights Surveying and Mapping, Inc. Slater Township Field Book #2, pp.68-17, and #3, p.44.

## Coordinates:

Cass County North

Northing = 66,728.605 meters  
Easting = 173,610.124 meters

State Plane Coordinate System  
Minnesota Central Zone  
NAD 83

Northing = 338,726.826 meters  
Easting = 823,744.617 meters

Latitude = 47°07'45.50173" North  
Longitude = 93°56'13.77690" West