

410185

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jamie Krume SIGNATURE 2/12/99 DATE

Registration No. 23668

- Land Surveyor, Professional Engineer,
- County Surveyor, County Engineer,

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:15 P M. on the 23rd day of February A.D., 1999

County Recorder Claudine Kaylor

By K. J. Deputy

DOCUMENT NO. 410185


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 10, Township 141 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 6/26/97 found a 2 INCH SQUARE TELSPAR TUBE MONUMENT,
DATE
CAP MISSING, DOWN 0.30 FEET ON CENTERLINE OF HWY. 200.
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

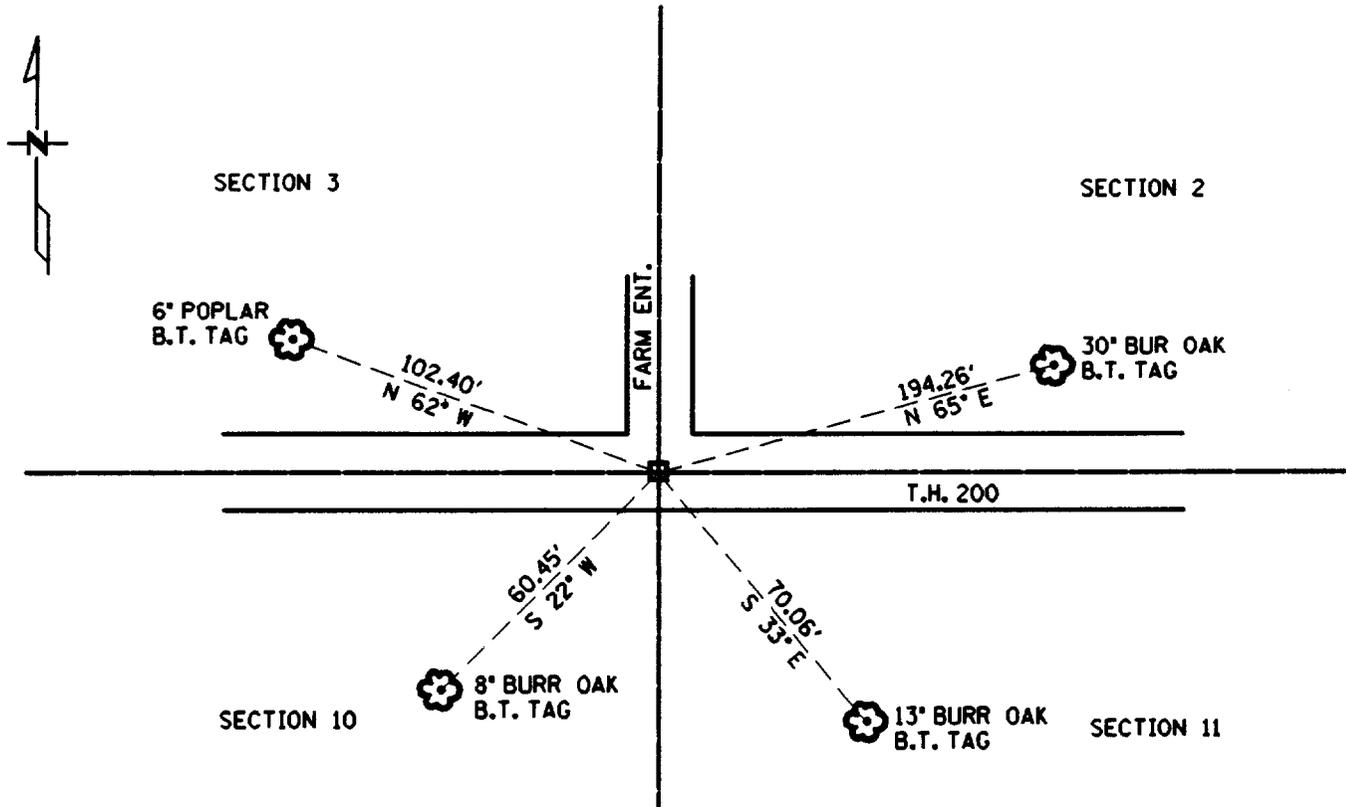

Statement of evidence relative to this corner location is on back of page.

Statement of Evidence: Northeast corner section 10, T. 141 N., R. 28 W., 5th P.M.

- 1874 US General Land Office survey set a wood post for this corner and marked the following bearing trees: 8" Elm S 4 W 60 links, 9" Oak N 77 E 80 links.
- 1915 County Surveyor Record Book "B", pages 169-177, shows a survey by John Curo. He found the old Govt. White Oak and stake and set a 2 1/2" x 48" Iron Monument.
- 1917 County Surveyor Record Book "B", pages 601-603, shows a survey by E.B. Horst. He found an iron monument.
- 1918 US General Land Office dependant resurvey found a 3" I.P. and old BT's: Oak stump NE and stump hole southerly. Set a 2" x 36" I.P. with marked brass cap and marked the following bearings: 8" Poplar N 49-45 E 339 links, 16" White Oak S 61-15 E 334 links, 8" Poplar S 55-45 W 219 links, 6" Norway Pine N 36 W 315 links.
- 1923 Minnesota Highway Dept. R/O/W map shows brass cap in road at PI station 471+27.5.
- 1987 Walt Curo, under forest service contract, found a 1" iron rod on centerline E-W Hwy 200, down 1', set a 2" sq. X 18" telspar monument with stamped aluminum cap. Marked the following bearings, 6" Poplar N 62 W 102.40 ft., 30" Burr Oak N 65 E 194.26 ft., 8" Burr Oak S 22 W 60.45 ft., 13" Burr Oak S 33 E 70.06ft.
- 1997 Minnesota Department of Transportation found a 2" sq telspar monument with stamped aluminum cap. The Minnesota Department of Transportation accepts this position as the correct location for the corner.

For details and survey analysis, contact The Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.