



**CERTIFICATE OF LOCATION OF GOVERNMENT CORNER**


North Quarter Corner, Section 3, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

October 21, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) set an aluminum capped, aluminum rod at the quarter corner as a perpetuation of the original General Land Office (G.L.O.) position based on record bearings and distances from original Bearing Tree evidence.

SKETCH OF REFERENCE TIES & EVIDENCE  
T.143N., R.27W.



NOT TO SCALE

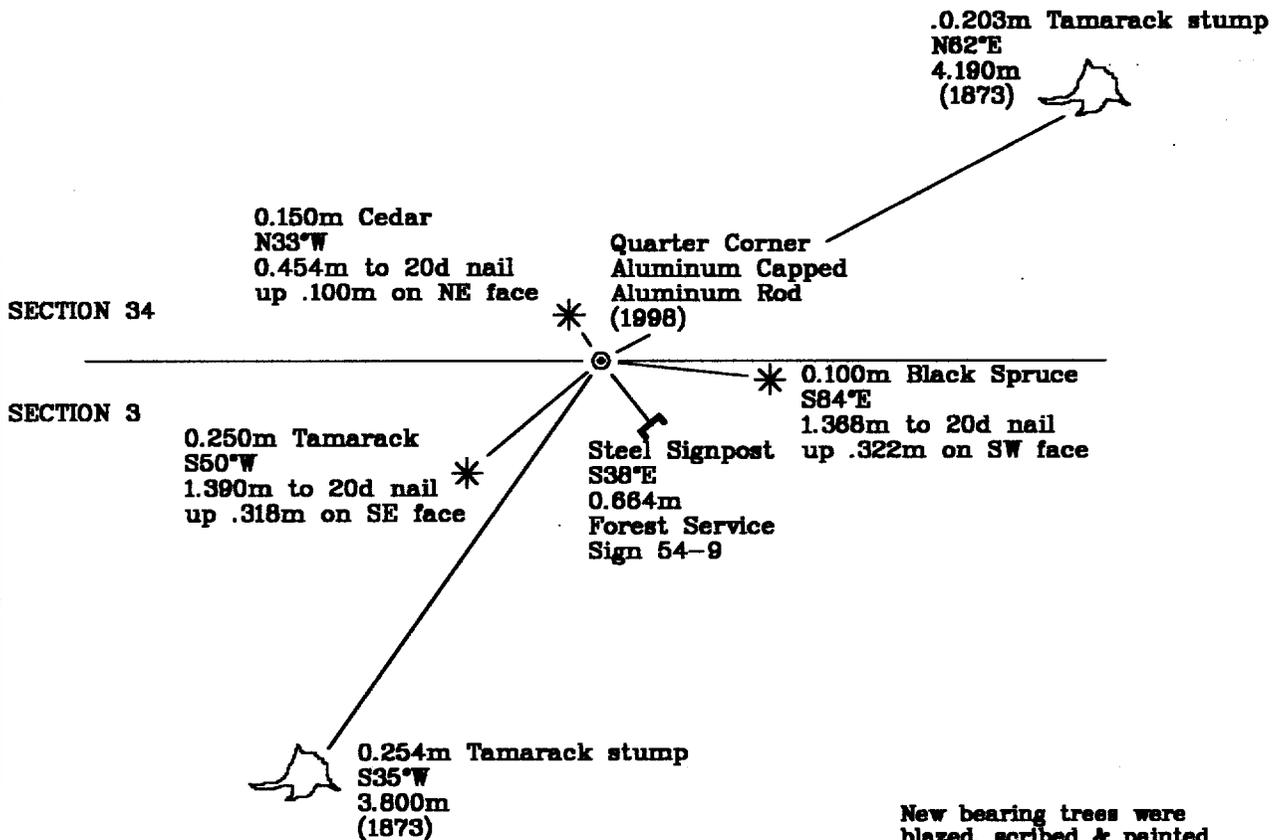

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

T.142N. R.27W.

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*LeVerne Leuelling* 5-20-99  
LeVerne Leuelling Date  
Licensed Land Surveyor No. 16089  
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413183  
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 4:20 P.M. Date: May 25, 1999  
Recorder Claudine Kaylor  
By K.F. Deputy  
DOCUMENT NO. 413183

## Statement of Evidence

Page 2 of 2

North Quarter Corner, Section 3, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873: General Land Office (G.L.O.) survey notes; Deputy Surveyor P.H. Conger set a wooden post for the quarter corner and referenced it with the following:

6"(0.152m) Tamarack	8"(0.203m) Tamarack
S39°W	N68°E
18 Links (3.621m)	20 Links (4.023m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

April 7, 1903; R.C. Smith of the Army Corps of Engineers Book #355, p.63, found two 6" Tamarack trees that were bearing trees. Both were alive and all marks were plain Stadia based; calculated distance to SW corner of Section 34 was 808.3m and to SE corner of Section 34 was 817.9m.

October 15, 1998; Northern Lights Surveying and Mapping, Inc., crew of Foster and Heinle cruised 2640' (804.674m) east from the SW of section 34 and established 2 GPS points. An initial search was made with a possible NE BT being found N52°W ± 23m from GPS point.

October 21, 1998; Northern Lights Surveying and Mapping, Inc., crew of Leuelling and Heinle returned to found BT and found a second stump nearly matching GLO bearing and distance. A 0.019m diameter aluminum rod, 1.829m long, with a stamped 0.083m diameter aluminum cap was set at a compromised record bearing and distance from the 2 stumps and the following references were then established:

0.150m Cedar	0.250m Tamarack	0.100m Black Spruce
N33°W	S50°W	S84°E
0.454m to 20d nail	1.390m to 20d nail	1.368m to 20d nail
up .100m on NE face	up .318m on SE face	up .322m on SW face
Steel Signpost	.0.203m Tamarack stump	0.254m Tamarack stump
S38°E	N62°E	S35°W
0.864m	4.190m	3.800m
Forest Service	(1873)	(1873)
Sign 54-9		

The 2 stumps were believed to be original GLO bearing trees. Our distance to the SW corner of Section 34 was 800.087m and our distance to the SE corner of Section 34 was 824.369m.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p.70.

## Coordinates:

## Cass County North

Northing = 69242.020 meters  
Easting = 162522.977 meters

State Plane Coordinate System  
Minnesota Central Zone  
NAD 83

Northing = 339,232.105 meters  
Easting = 812,650.340 meters

Latitude = 47°09'07.85518" North  
Longitude = 94°04'59.52133" West