


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner, Section 22, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

A brass capped steel pipe was set at the position of a County wooden hub set in the 1910 - 1915 era by Cass County Surveyor who had recovered the General Land Office post.

SKETCH OF REFERENCE TIES & EVIDENCE
T.143N., R.27W.



NOT TO SCALE

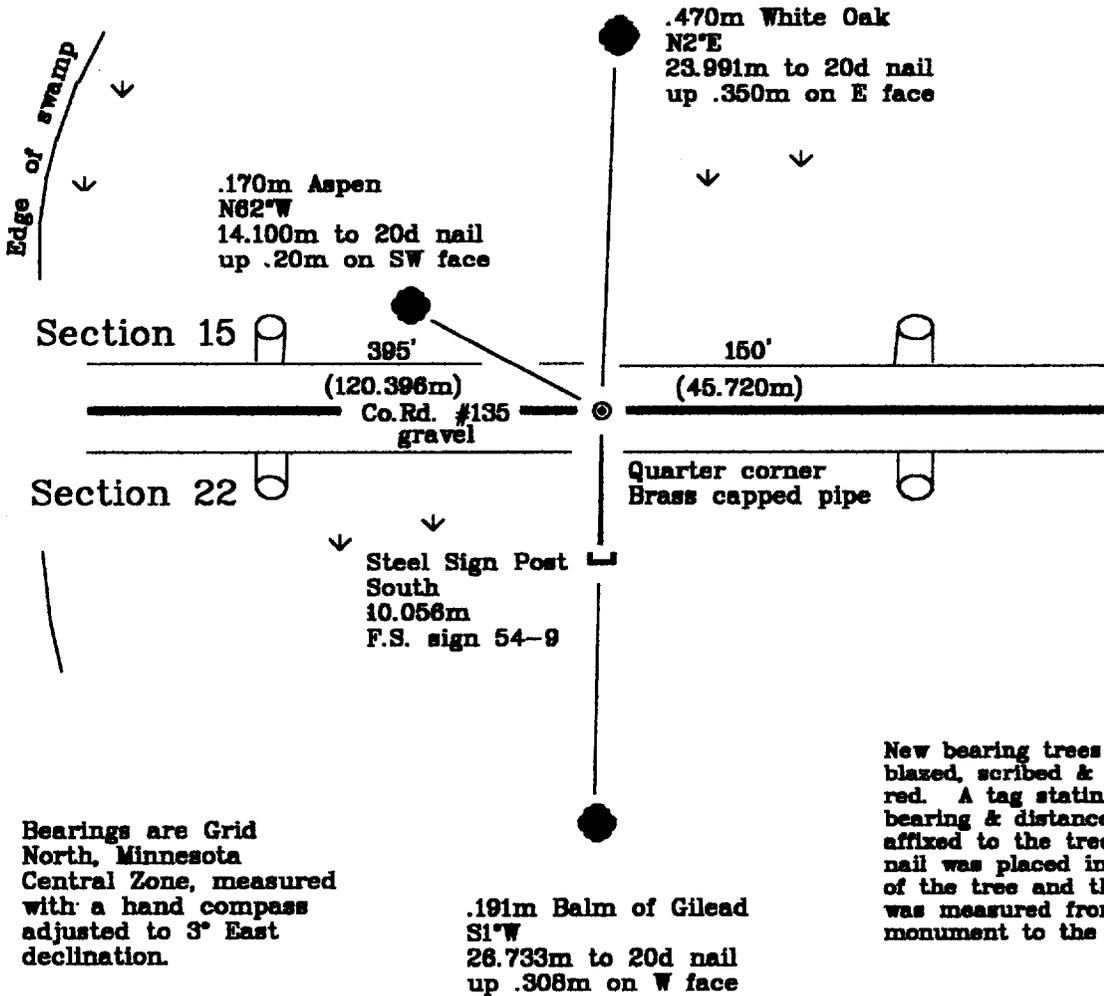

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelking 5-30-1999
 LaVerne Leuelking Date
 Licensed Land Surveyor No. 16089
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413416
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 9:55 A.M. Date: 6-3-99
 Recorder Claudine Kaylor
 By K.F. Deputy
 DOCUMENT NO. 413416

Statement of Evidence

North Quarter corner of Section 22, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wood post for the quarter corner and referenced it with the following:

10" (0.254m) Tamarack	10" (0.254m) Tamarack
S6°E	N72°W
48 Links (9.656m)	76 Links (15.289m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1910-1915; County Road Survey by George Ralph, Book "B," P.97, Survey Record #280: found old post, and the following Bearing Tree:

	also set a new BT:
6" (0.152m) Ash	6" (0.152m) Poplar
S38°30'W	N37°30'W
47.6 ft (14.509m)	41.8ft (12.741m)

The distance west to the NW corner of Section 22 was 2653.4 feet. The distance east to the NE corner of Section 22 was 2668.6 feet.

1925; Cass county Land Corner Record: During a Survey of State Road #4, Cass County Highway Department found what is called an approximate corner, which nearly matched position called for in 1910-1915.

November 14, 1969; United States Forest Service T.143N. R. 27W. field book #1 P. 43; William Okerman LS 6807, using county survey record distance from the west, searched but did not find the corner.

1998; Northern Lights Survey and Mapping, Inc., crew of Leuelling and Heinle used road calls from the 1925 Road alignment survey to try and locate the corner position. Calls were as follows:

Culvert 150 feet east of corner
NLSM: 150 feet
Culvert 417± feet west of corner
NLSM: 395 feet
Swamp edge 7.83 chains west
NLSM: 505 feet

December, 1998; NLSM crew of Ruuhela and Carlson returned to site to set the monument. Position was based on the call for the east culvert and the centerline of road. As they dug to set monument, they found the County post, and set monument in that position. The monument set was a brass capped 0.015m diameter galvanized steel pipe 0.610m long and 0.250m below the grade. The following references were established:

.470m White Oak	.170m Aspen	.191m Balm of Gilead
N2°E	N62°W	S1°W
23.991m to 20d nail	14.100m to 20d nail	26.733m to 20d nail
up .350m on E face	up .20m on SW face	up .308m on W face

Steel Sign Post
South
10.058m
F.S. sign 54-9

Distance west to NW corner of section 22: 803.63m
Distance east to NE corner of section 22: 816.246m

Northern Lights Surveying and Mapping, Inc., Boy River Township Book#2, p.27.

Coordinates:

Cass County North

Northing = 74098.522 meters
Easting = 162475.940 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 344088.430 meters
Easting = 812601.366 meters

Latitude = 47°11'45.10912" North
Longitude = 94°05'01.36203" West