

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 11, Township 140, Range 28, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


- On 3/22/00 found a BROKEN CIM LAYING DOWN WITH TOP MISSING  
DATE AND 2 RECORD TIE TREES
- left monument as found,  lowered monument,  removed monument (explain)
- On 3/22/00 Placed a DEPARTMENT SURVEY MONUMENT  
DATE IN CENTER OF WEST ROAD DITCH.

### SKETCH OF REFERENCE TIES



NOTE:  
ALL TIE TREES BLAZES PAINTED RED

- ① FOUND DBL BLAZED OAK W/BT TAG
- ② FOUND DBL BLAZED MAPLE, NO BT TAG
- ③ SET DNR RP UP 2.7' S SIDE 10" ASH DBL BLAZED

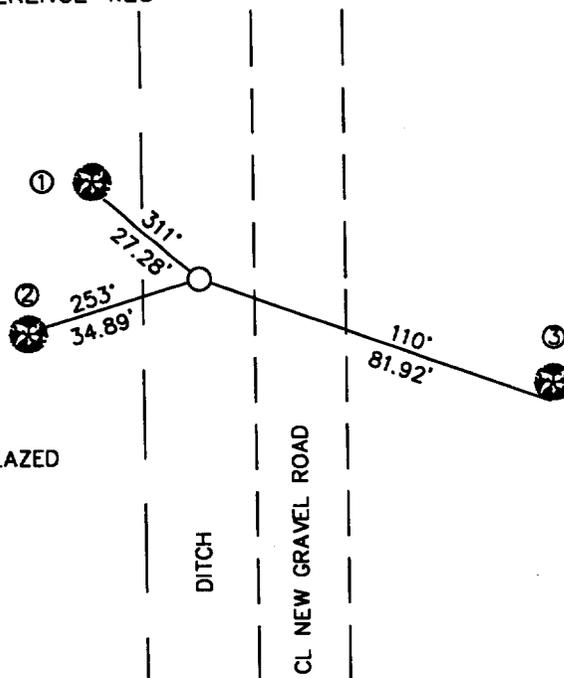

1983 CASS COUNTY NORTH  
COORDINATE SYSTEM  
1996 ADJUSTMENT  
N= 155620.43  
E= 510686.50

AZIMUTHS ARE OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page.

11/9/00  
FOM 01869

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 11/22/00  
SIGNATURE DATE

License Number 16098

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER # 430977  
County of Cass

I hereby certify that this document was filed in the Co. Recorders Office at 3:20 P .M. on the 28th day of Nov. A.D., 2000

County Recorder Claudine Kaylor for  
By \_\_\_\_\_, Deputy

DOCUMENT NO. 430977

**East Quarter Corner Section 11, Township 140 North, Range 28 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying  
AMI Surveyors and Mappers

The history is the same as on the Certificate of Location of Government Corner filed by Gary H. Stevenson and recorded as Document # 295284.

2000 In March, the DNR Survey Crew found a broken cast iron monument, top missing, laying in road ditch. The road has been reconstructed and moved about 13' easterly. Two record tie trees were found: W. Oak 8" N 49° W 27.28' and Maple 16" S 73° W 34.89'. Set a 3/4" x 24" iron rod with a MN DNR SURVEY MARKER top flush in ground at the intersection of the ties.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401