

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 138N, Range 32W, 5TH P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch

- ON 5/21/97 found an 8" X 8" X 36" concrete monument 1.3'
below the road surface.
- left monument as found, lowered monument, removed monument (explain)
- ON 5/21/97 placed a 3/4" Iron pin on the south edge of the
concrete monument.

NOTE: ~~All Bearings are magnetic.~~
Bearing trees are blazed.

SKETCH OF REFERENCE TIES

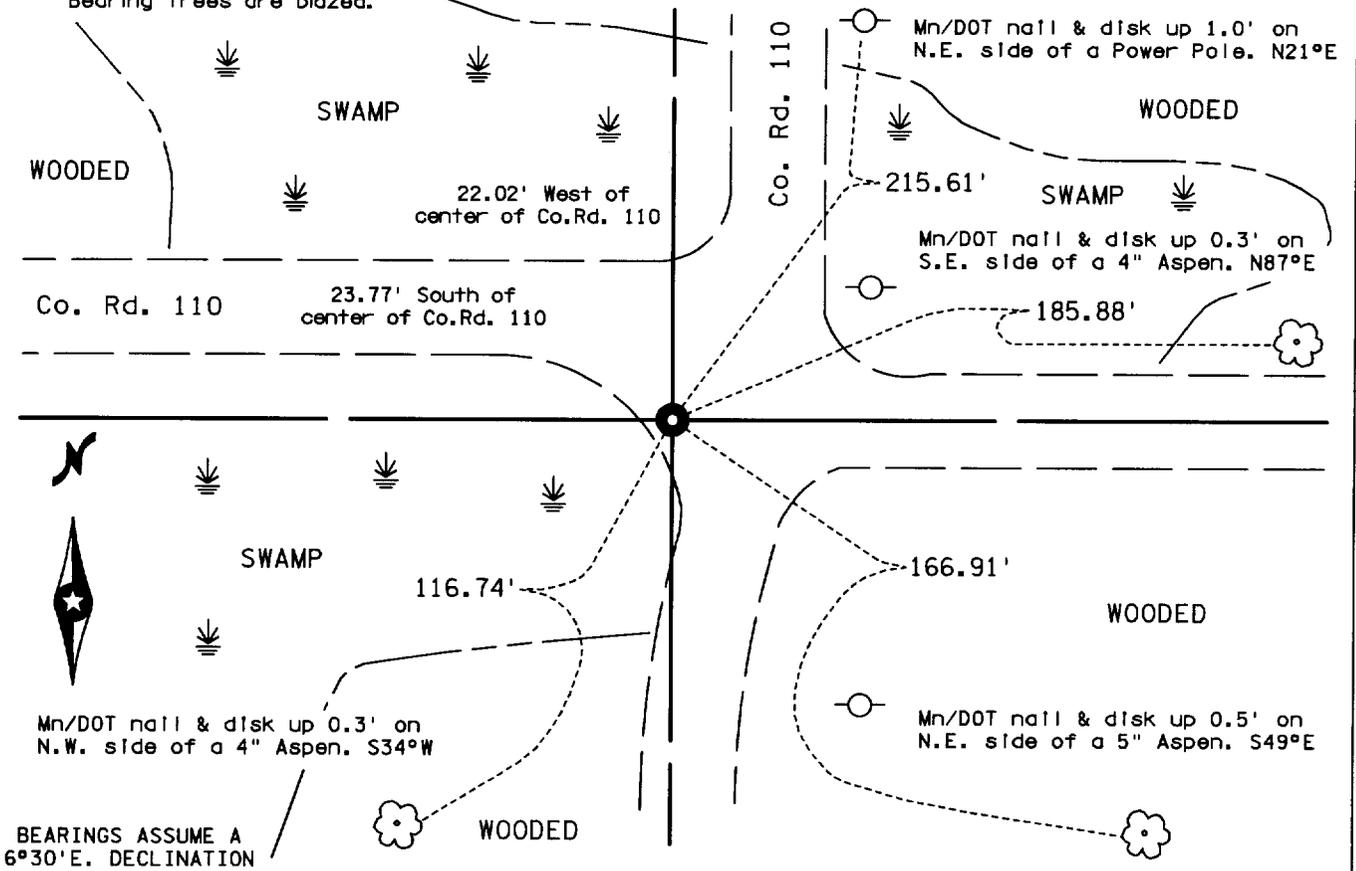

BEARINGS ASSUME A 6°30'E. DECLINATION

Statement of evidence relative to this corner is on back of page # 433372

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Kenneth R. Donaghy 7/27/97
SIGNATURE DATE

Registration No. 14950

Land surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:05 A.M. on the 5th day of March A.D. 192001

County Recorder Claudia Kaylor
By John F. Nader, Deputy

DOCUMENT NO. 433372

Statement of Evidence:

NORTH EAST CORNER SECTION 6, TOWNSHIP 138 NORTH,
RANGE 32 WEST OF THE FIFTH PRINCIPAL MERIDIAN

The original Public Land Survey was run by Jacob Myers in 1860. A post was set to mark the corner and three bearing trees were recorded as accessories; a 4- inch Tamarack South 9 ½ degrees East 62 links, a 10- inch Aspen South 15 degrees West 125 links and a 14- inch Tamarack North 73 degrees East 165 links.

In 1898 Lewis A. Berg, Hubbard County Surveyor, accomplished a subdivision of Section 31, Township 139 North, Range 32 West. No information about this corner was recorded.

At a unknown date H.S. Todd duplicated much of the work accomplished by Berg in 1898. No information about this corner was recorded.

In 1908 John Curo, Cass County Surveyor, searched for and failed to recover any evidence of this corner. A wood stake was placed to mark the corner in lost position; a single proportion measurement between the northwest corners of Sections 4 and 6 of Township 138 North, Range 32 West. In 1912 the wood stake marking the corner was replaced with an 8 inch by 8 inch by 36 inch cement monument.

In 1946, E. M. Wilsie, Hubbard County Surveyor, recovered the cement monument placed by Curo in 1912 to mark this corner.

May 21, 1997, Todd Larson and Ryan Durgin of the Minnesota Department of Transportation recovered the cement monument placed by Curo in 1912 to mark this corner. The cement monument was recovered 1.3 feet below the road surface and was left in place.

The cement monument placed by Curo in 1912 and recovered by Larson and Durgin in 1997 was accepted as marking this Public Land Survey corner. This cement monument was placed by applying proper survey procedure and acceptable survey tolerances.

For recent survey measurements and additional information contact the Surveys Section of the Minnesota Department of Transportation in Bemidji.