

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Greg L. Smith*

Date: 9/6/01 License No: 21367

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 10:35 o'clock A.M. on the 10th day of Sept., 20 01 A.D.

County Recorder Kathryn M. Norby

By: John F. Maeder, Deputy  
DOCUMENT NO. 440133

RM TO MC #24 Corner of Section 4, Township 141 N, Range 31 W, 5TH P.M.

On 5/10/01 found a 2" TELSPAR POST WITH ALUM. CAP MARKED RLS 11946


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

decl: 5° E (ASSUMED)

## SKETCH OF REFERENCE TIES

LAT. 47° 04' 07.6701"  
LONG. 94° 36' 03.1589"

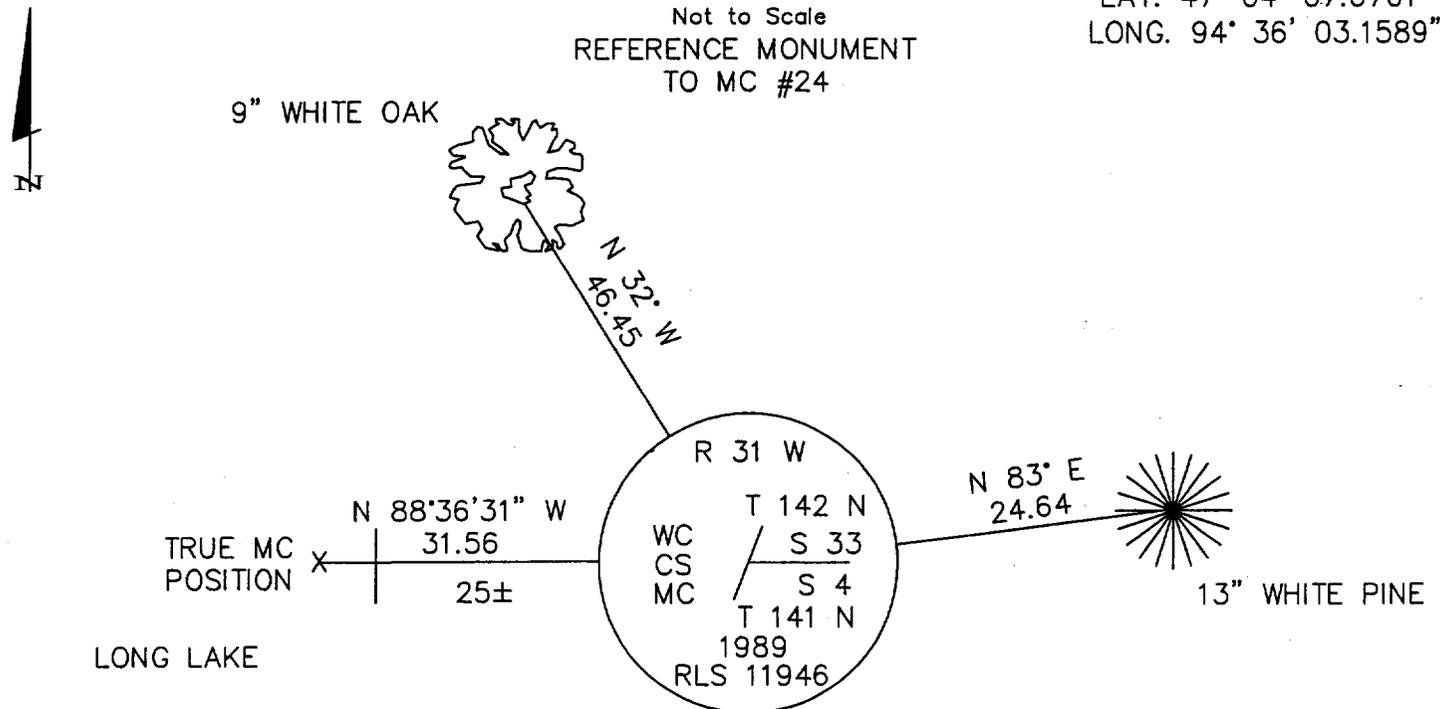

CORNER IN HIGH VISIBILITY AREA.  
NO NEW SCRIBING OR PAINTING ON B.T.S.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. A 12 - 13

Reference to Meander Corner No. 24, Section 33,  
Township 142 North, Range 31 West, Cass County,  
Minnesota

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while running the south line of Township 142 North, Range 31 West. A wood post was set to mark the corner position with the following witnesses: A 4" Birch, North 13 degrees East, 28 links; a 4" Birch, South 88 degrees East, 26 links.

1925 County resurvey plat by John Greene shows the subdivision of Section 4, Township 141 North, Range 31 West. An iron monument was set on the Section line.

1989 Roger Mustonen, RLS No. 11946 set a County Telspar monument with aluminum cap on the Section line.

2001 May 10, a Landecker & Associates, Inc. survey crew found a 2" Telspar post with aluminum cap marked with RLS 11946 and dated 1989. Landecker & Associates, Inc. of Walker accepts the monumented position as reference to the meander corner position from which the following accessories: A 13" White Pine, North 83 degrees East 24.64 feet MKD with a chest high blaze and "BT" at base, and a 9" White Oak, North 32 degrees West 46.45 feet MKD with a chest high blaze and "BT" at base. The true meander corner position was determined by measuring the original distance westerly from the Northeast corner of Section 4.

True Meander Corner Position  
LAT. 47° 04' 07.6755"  
LONG. 94° 36' 03.6147"