

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 24, Township 135 N, Range 31 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 7-8-98 found a 2" Ø IRON PIPE UP 0.5' IN WOODS ± 55' W OF  
DATE E LOGGING TRAIL ROAD
- left monument as found,       lowered monument,       removed monument (explain)
- On \_\_\_\_\_ Placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

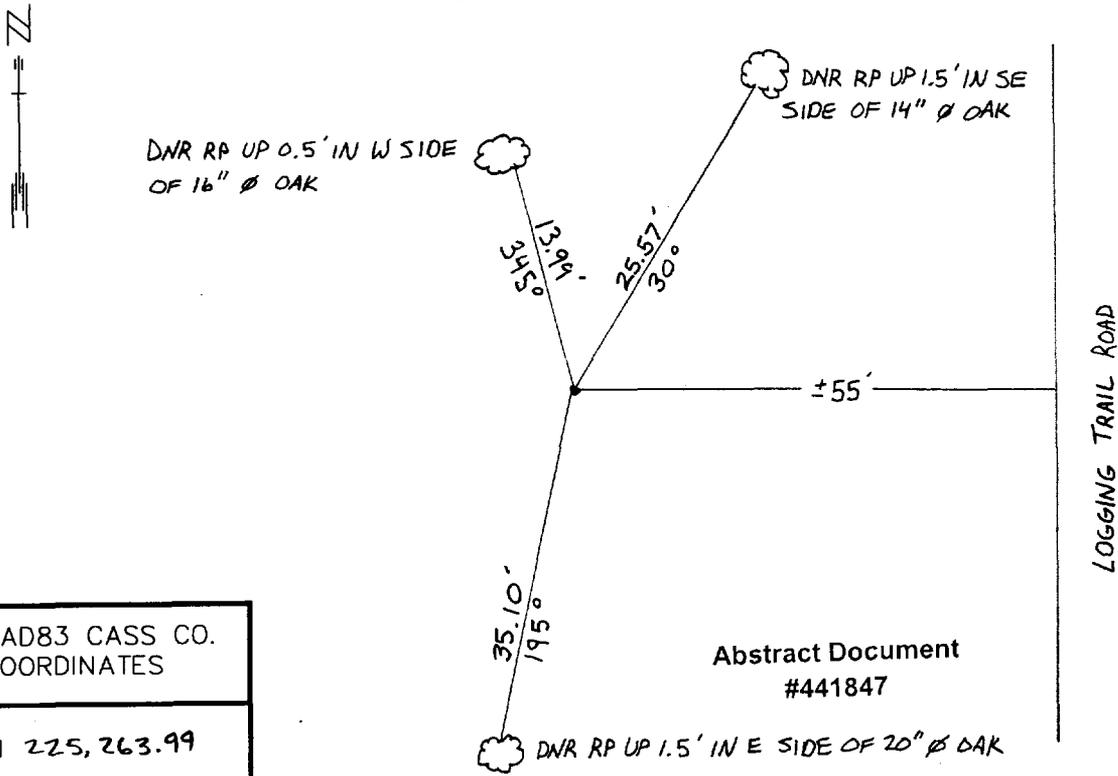

NAD83 CASS CO. COORDINATES  
 N 225,263.99  
 E 486,754.70

Abstract Document #441847

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page. DATE FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 5/31/01  
SIGNATURE DATE

License Number 16098

Land Surveyor,       Professional Engineer  
 County Surveyor,       County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:34 P.M. on the 16th day of Oct. A.D., 2001

County Recorder Kathryn M. Nolley  
 By John F. Maeder, Deputy  
 DOCUMENT NO. 441847

**Northeast Corner Section 24, Township 135 North, Range 31 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying

1858 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Maple 10" S 25° E 10 links  
Elm 10" N 71° E 28 links  
Pine 30" S 81° W 67 links  
Pine 36" N 20° W 75 links

1920 Lincoln Mackey surveyed the Rainbow Trail through this township. He found all four of the original tie trees and set a 2" x 48" iron monument. He took the following new ties:

Poplar 7" N 1° 24' W 29.5'  
Oak 12" S 33° 30' E 135.5'  
Poplar 6" N 59° 56' W 53.1'

1923 On roll 115, book 94, page 151, a county surveyor measured 10700' between the northeast corner of sections 12 and 24. He states there is an I.M. at this corner.

1971 Donald Coulter worked on sections 10 - 15 for a plat of Wilderness Park. He found a 2" iron pipe and Mackey's tie trees for the corner and took new ties to four oak trees.

1998 The DNR survey crew found a 2" iron pipe and three of the new tie trees taken by Coulter. The iron pipe was accepted as marking the original location of the corner.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425