

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
TERRY L. FREEMAN

Date: 11/1/01 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 2:25 o'clock P.M. on the 1st day of Nov., 20 01 A.D.

County Recorder Kathryn M. Norbey

By: John F. Maeder, Deputy
DOCUMENT NO. 442507

EAST QUARTER Corner of Section 22, Township 141, Range 31, 5TH P.M.

On 8/22/01 found a 1/2" IRON PIPE MARKED RLS #21367

left monument as found, lowered monument, removed monument (explain)


On 8/22/01 placed a 2" X 48" IRON PIPE WITH STAMPED BRASS CAP UP 12"

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

LAT. 47° 01' 03.2037"
LONG. 94° 34' 36.8744"
NAD 83 (1996)

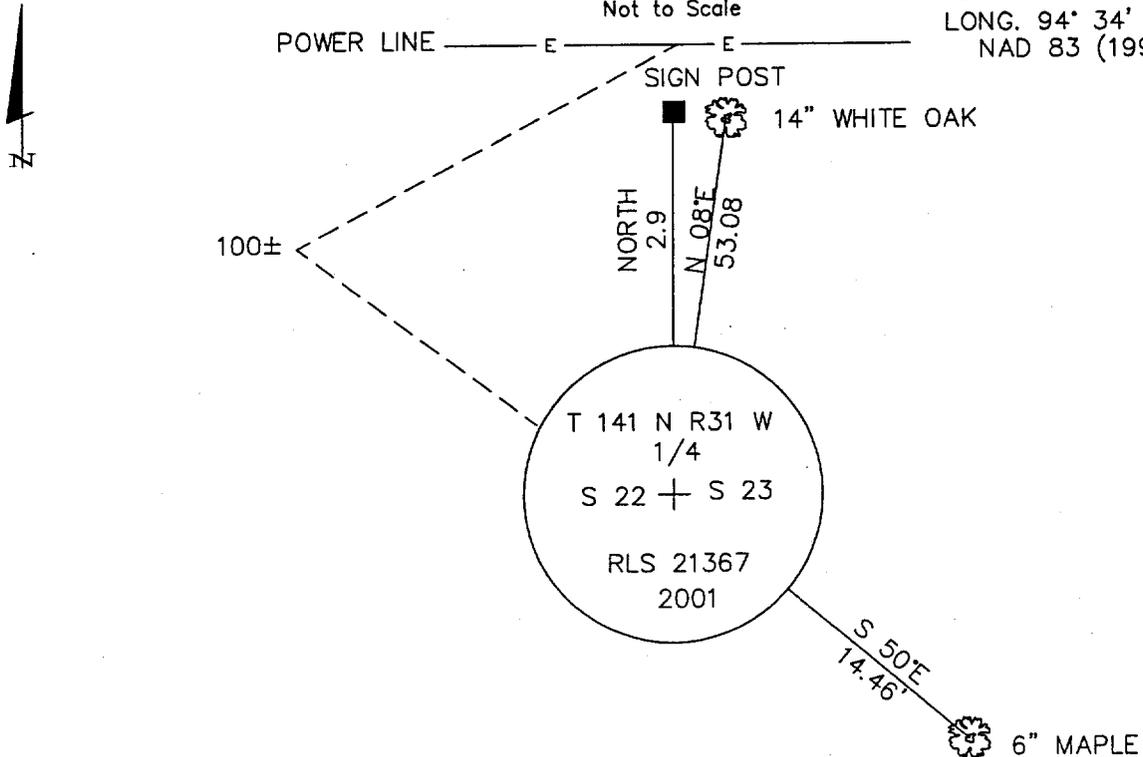

THE BEARING TREES ARE SCRIBED, PAINTED WITH RED ENAMEL AND MARKED WITH BT TAGS.

ALL DISTANCES ARE HORIZONTAL TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. P - 17

East Quarter corner, Section 22, Township 141 North,
Range 31 West, Cass County, Minnesota

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 31 West. A wood post was set to mark the corner position with the following witnesses: A 3" Poplar, North 29 degrees West, 13 links; a 3" Poplar, North 71 degrees East, 10 links. Notes on file in the Secretary of State's office with a copy in the County Surveyor's office.

1936 Civilian Conservation Corps (CCC), Book #87, Page 1. They ran the line between Sections 22 & 23. Finding no evidence of the corner, they set a 3" Cedar stake at midpoint of section line. Notes on file in the U.S.F.S. Supervisor's office in Cass Lake.

1999 September, a Landecker & Associates, Inc. survey crew traversed the east line of Section 22. No evidence of original corner or of 1936 CCC Survey. They set a 1/2" iron monument marked by License #21367 at the midpoint between the recovered SE and calculated NE corners of Section 22. Notes on file in the Walker office of Landecker & Associates, Inc.

2000 October 31, Rob Main, U.S.F.S. Surveyor found a 1/2" iron pipe with orange plastic cap marked RLS #21367 in an Aspen stand 100 feet south of the south edge of powerline clearing. Notes on file in Book 1 of 5, Township 141 North, Range 31 West, page 34 in the U.S.F.S. Supervisor's office in Cass Lake.

2001 August 22, a Landecker & Associates, Inc. survey crew found the 1/2" iron pipe marked by License #21367 as set in 1999. The iron pipe was replaced with a 2" x 48" galv. iron pipe with stamped brass cap from which the following witnesses: A 14" White Oak, North 8 degrees East, 53.55 feet; a 6" Maple, South 50 degrees East, 14.46 feet. This position is accepted as set in the lost position for the corner.