


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.


TERRY L. FREEMAN

Date: 9/30/03 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 11:55 o'clock A.M. on the 7th day of Oct, 20 03 A.D.

County Recorder Kathryn M. Morby

By: de, Deputy
DOCUMENT NO. 474530

NORTH QUARTER Corner of Section 28, Township 140, Range 26, 5TH P.M.

On 9/16/03 found a 3/4" IP WITH PLASTIC CAP MARKED RLS 9672


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

decl: 5' EAST (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

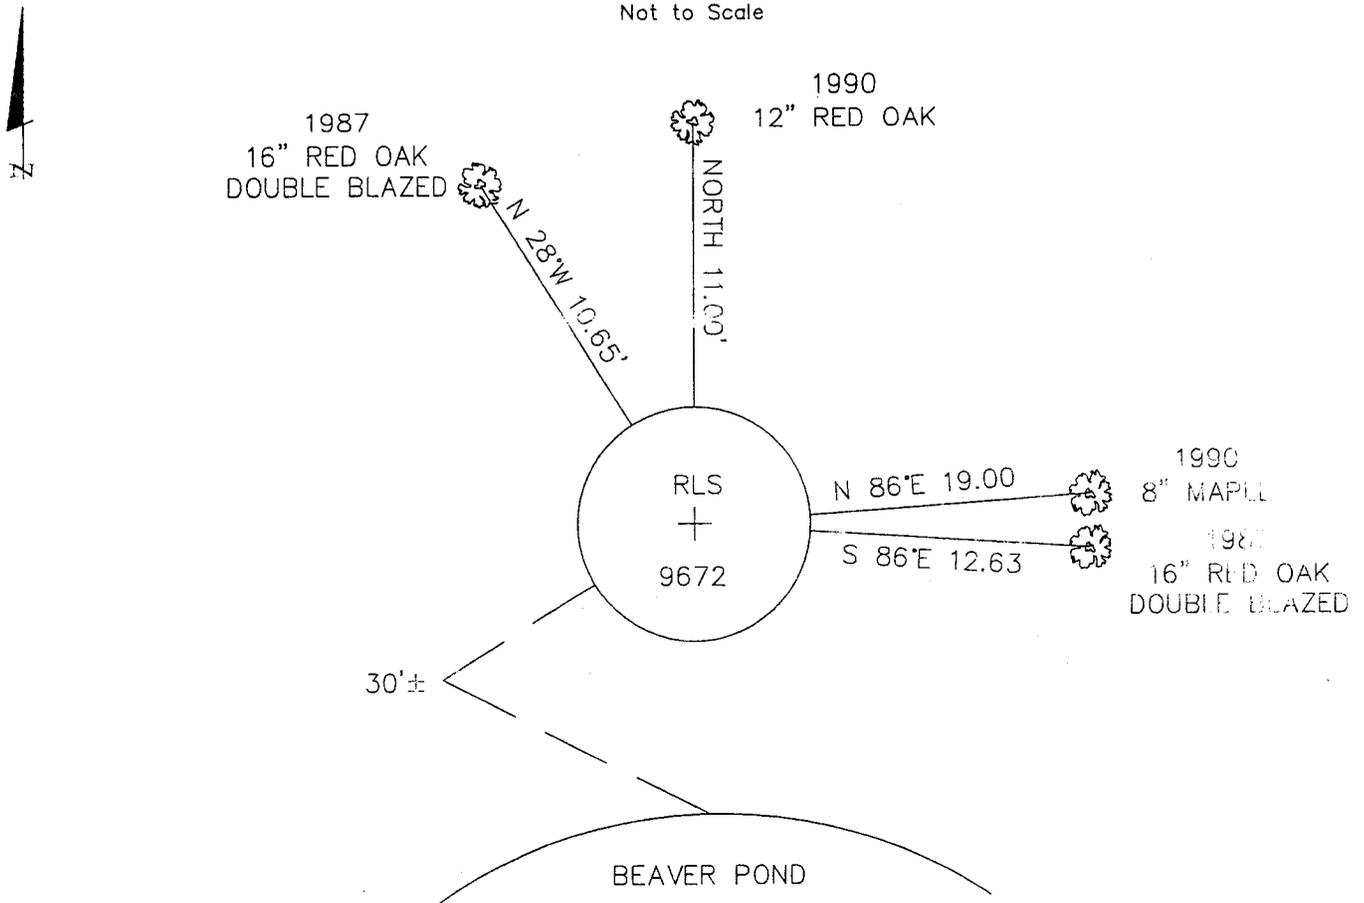

ALL DISTANCES ON DOUBLE BLAZED TREES ARE TO FACE OF BOTTOM BLAZE

Statement of evidence for this corner position is on the back of this page

North Quarter, Section 28, Township 140 North,
Range 26 West, Cass County, Minnesota

- 1871 Walker, Allen, & Putnam, U.S. Deputy Surveyors, originally established this corner while surveying the subdivision and meander lines of Township 140 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses: A 12 inch Oak, South 49 degrees East, 28 links; A 8 inch Oak, North 64 degrees West, 75 links.
- 1987 Wallace F. Buckler, Registered Land Surveyor, set a ¾ inch iron pipe at the lost position with the following accessories: A 16 inch Red Oak, North 28 degrees West, 10.65 feet; A 16 inch Red Oak, South 86 degrees East, 12.63 feet.
- 1999 Cass County Land Department crew found a ¾ inch iron pipe with plastic cap marked RLS 9672 and found the following accessories: A 8 inch Maple, North 86 degrees East, 19.00 feet; A 12 inch Red Oak, North, 11 feet established by RLS 11946 in August, 1990. Line has been cut East and North.
- 2003 September 16, a Landecker & Associates, Inc. survey crew found a ¾ inch iron pipe and accepts the corner as the North Quarter corner.