

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 29, Township 138, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


On 10-10-95 found a 3/4" IRON ROD (DOWN 0.3') IN CENTER LINE N-S ROAD
DATE

left monument as found, lowered monument, removed monument (explain)

On Placed a
DATE

SKETCH OF REFERENCE TIES

NOTE: TOOK TIES ON 3-20-97

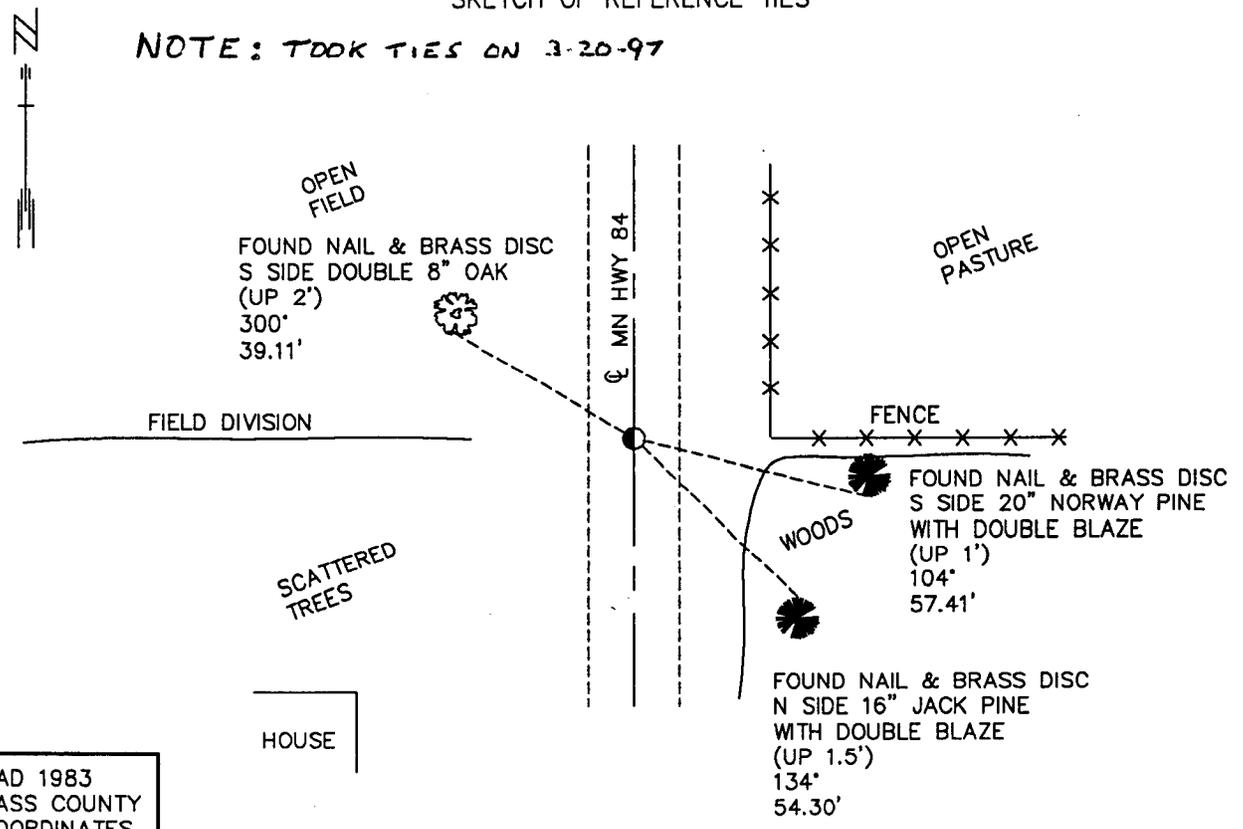

NAD 1983
CASS COUNTY
COORDINATES
N 315660.01
E 525481.61

NOT TO SCALE
AZIMUTHS OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page.

APRIL '97
FOM01854

I hereby certify that this document and the data contained herein was prepared by me or under

my direct supervision.
Jerald D. Walker 4/24/97
SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of

I hereby certify that this document was filed in the Co. recorders office at .M. on the day of A.D., 19

County Recorder
By , Deputy

DOCUMENT NO.

Northeast Corner Section 29, Township 138 North, Range 29 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
 Cass County Surveyor
 Widseth, Smith and Nolting of Brainerd
 Landecker and Associates of Pequot Lakes
 Landecker and Associates of Walker
 Comstock and Davis of Brainerd

1865 The U.S. General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees are marked:

N. Pine 14" N 48° E 84 links (55.44')
 N. Pine 16" N 24° W 65 links (42.9')
 N. Pine 16 " S 55° W 34 links (22.44')
 N. Pine 16" S 41° E 61 links (40.26')

1911 A.W. Moulster found a stake set by Curo from all old Govt.. Bts for this corner. He set a 2"x 48" iron pipe in concrete. He shows the following ties:

N. Pine Stump N 23° W 40.10'
 N. Pine Stump S 51° 44' E 28.70'

This is recorded on the county land corner record.

1920? County Highway Department show an iron monument at the corner. 3" concrete and steel monuments were NE and SE of the corner at 30'. This is recorded on the county land corner record.

1995 The DNR survey crew found a 3/4" iron rod down 0.3' in centerline of the road. The iron is in line with a fence line east and a field division west. The position of the monument was located with GPS equipment for a survey of section 23 of this township and range in Crow Wing County.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 500 Lafayette Road, St. Paul, MN 55155-4029.

A000515670

OFFICE OF COUNTY RECORDER
 CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
 RECORDED ON
 07/24/2006 09:43:44AM

AS DOC #: A000515670
 PAGES: 3
 REC FEES: \$0.00

KATHRYN M. NORBY
 COUNTY RECORDER