

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 TERRY L. FREEMAN

Date: 8/26/05 License No: 21367

OFFICE OF THE COUNTY RECORDER,
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
 DOCUMENT NO. _____

NORTH QUARTER Corner of Section 9, Township 139, Range 30, 5TH P.M.

On 3/28/05 found a RAILROAD SPIKE DOWN ±1 FOOT

left monument as found, lowered monument, removed monument (explain)


On _____ placed a _____

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

INDEX NO. E-11

Not to Scale

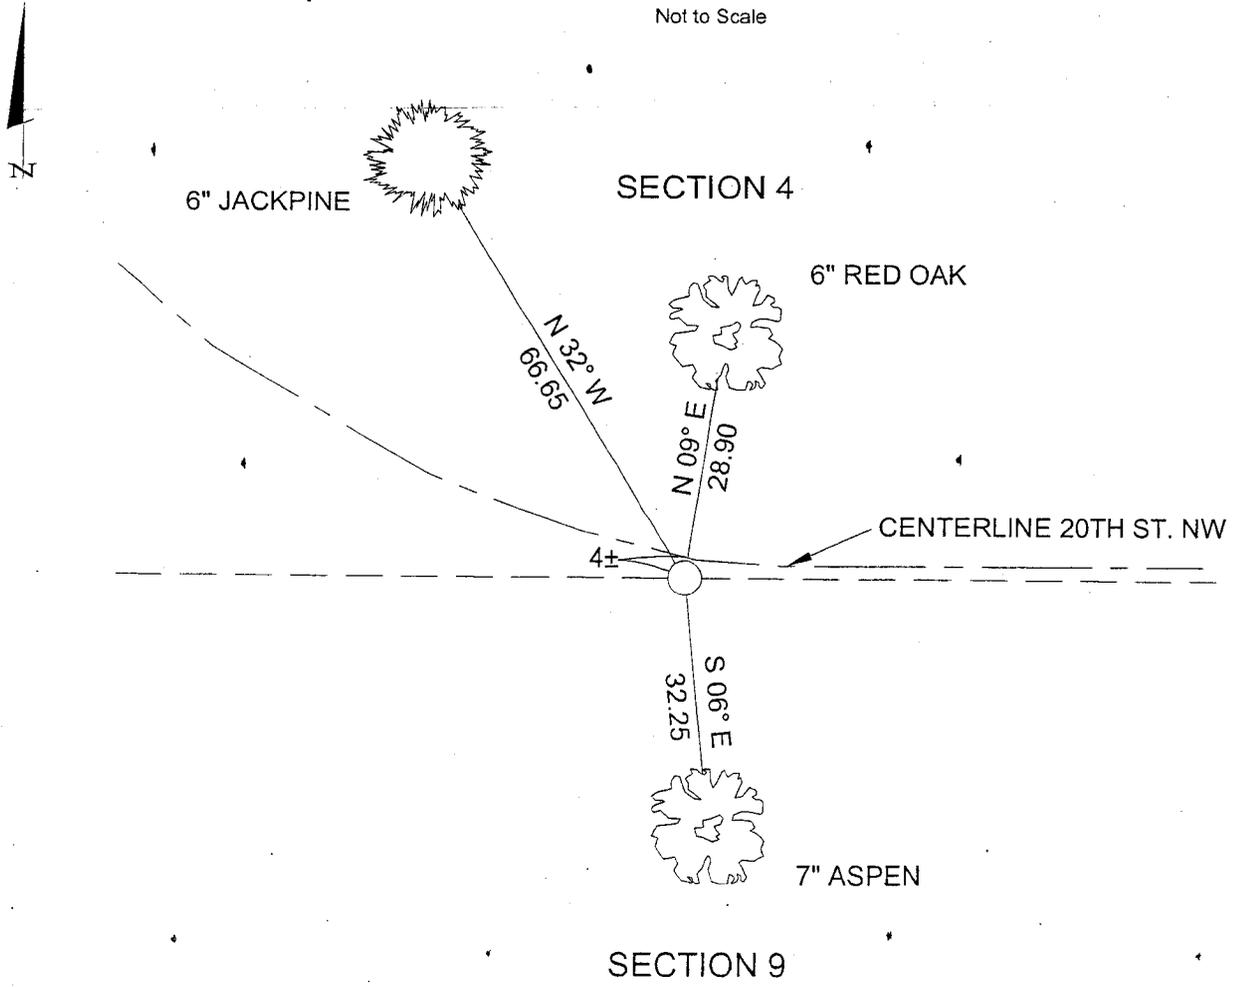

ALL DISTANCES ARE HORIZONTAL TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. E - 11

North Quarter Corner, Section 9, Township
139 North, Range 30 West, Cass County,
Minnesota

- 1865 George B. Wright and Thomas B. Walker, U.S. Deputy Surveyors, originally established this corner position while surveying the subdivisions and meanders in Township 139 North, Range 30 West. A wood post was set for the corner position with the following witnesses: An 8 inch Black Pine, North 46 degrees West, 100 links; A 10 inch Black Pine, South 75 degrees West, 150 links.

- 1911 Garmen, microfilm roll 11 S, Book 92, page 22, found both old bearing trees.

- 1914 Harry Todd, Deputy County Surveyor, set a stake for the true corner position. County Survey Record Book "A", pp. 373-377.

- 2001 Cass County Surveyor's office found a railroad spike down 1 foot ~~and accepted it as the corner position~~. The railroad spike was found \pm 4 feet south of the road centerline and on fence lines north and south. The following witnesses were established: A 10 inch Jackpine, South 28 degrees West, 25.92 feet; A 4 inch Jackpine, North 32 degrees West, 66.69 feet; A 4 inch Red Oak, North 9 degrees East, 28.93 feet.

- 2005 A Landecker and Associates, Inc. survey crew found the railroad spike down \pm 1 foot along with the Northwest and Northeast County bearing trees. The railroad spike was accepted for the corner position and the following witness established: A 7 inch Popple, South 6 degrees East, 32.25 feet.

A000515676

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON

07/24/2006 09:43:50AM

AS DOC #: A000515676
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby
#V DEPUTY