

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

David S. Landecker

 DAVID S. LANDECKER

Date: 4/21/06 License No: 17008
 17008

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
 DOCUMENT NO. _____

EAST MEANDER Corner of Section 17, Township 139, Range 26, 5 P.M.

On 03/02/05 found a 2" IRON PIPE FLUSH W/ GROUND; ALSO FOUND 2 EXISTING TIES
& SET 1 NEW TIE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: K-L-9

Not to Scale

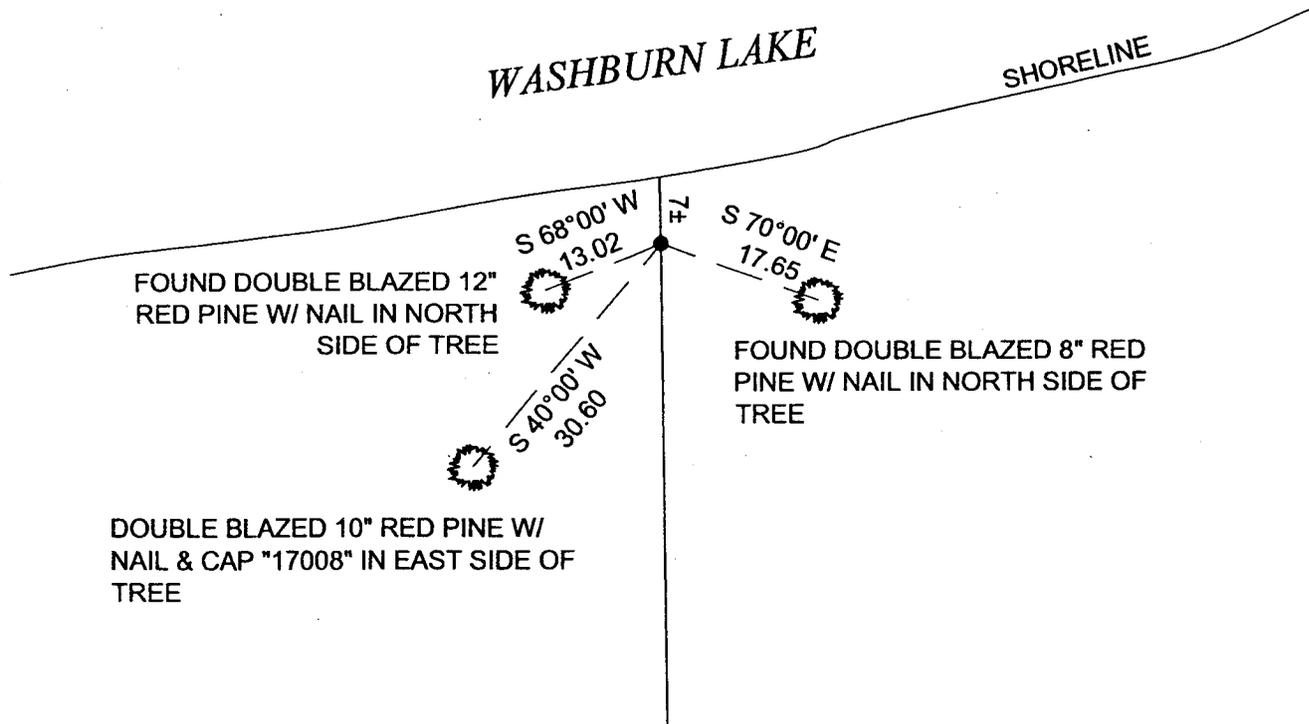

Statement of evidence for this corner position is on the back of this page

Statement of Evidence (K-L-9)

Meander Corner common to Sections 16 and 17, Township 139 North, Range 26 West, Cass County, Minnesota.

1863 - Gates A. Johnson and Alonzo L. Thorton, deputy U. S. Surveyors, in accordance with U. S. Government contract, surveyed the boundaries and subdivided Township 139 North, Range 26 West, 5th Principle Meridian, and was subsequently approved by the U. S. Surveyor General, whereby the referenced Government Corner post was set from which:

18" Norway Pine	S 40° E	327.36 feet (496 Lks)
18" Norway Pine	S 50° W	190.74 feet (289 Lks)

2005 - Landecker & Associates, Inc. surveyors, under the direction of David S. Landecker, Licensed Professional Land Surveyor No. 17008, searched extensively for evidence of the original corner and bearing trees for said corner. A 2" iron pipe was found near the location searched which, when tested with other related corners and section lines, was accepted as the perpetuation of the original meander corner and the following witnesses were established:

12" Red Pine Existing double blazed with nail	S 68° W	13.02 feet
8" Red Pine Existing double blazed with nail	S 70° E	17.65 feet
10" Red Pine Double blazed with nail and cap #17008	S 40° W	30.60 feet
South shore of Washburn Lake	North	7 +/- feet

A000515680

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
07/24/2006 09:43:54AM

AS DOC #: A000515680
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby
DEPUTY