



8 0 1 0 1 8 8
Tx:4007179

A000562187

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
07/28/2010 08:52:29 AM
AS DOC #: A000562187
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER**


Index No E - 5

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 7, Township 134, Range 30
5 TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 3/25/08 found a 2 1/2" x 48" iron pipe with a 3" threaded cap, lying on the
DATE side. Straightened monument and pounded down. Left up 1'
- left monument as found, lowered monument, removed monument (explain)
- On _____ Placed a _____
DATE

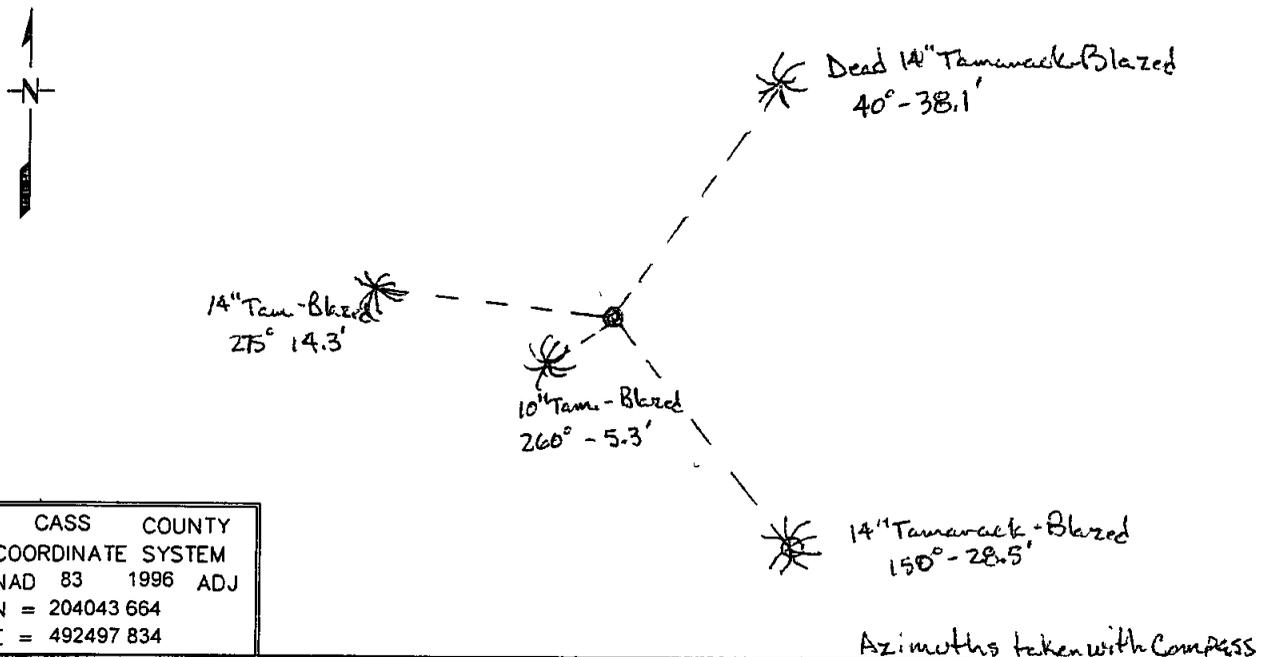

CASS COUNTY
COORDINATE SYSTEM
NAD 83 1996 ADJ
N = 204043 664
E = 492497 834

Statement of evidence for this corner location is on back of this page

SFT00039
JDW 3/25/08

I certify that this document was researched and prepared by me or under my direct supervision

SIGNATURE John D. Delk DATE 10/8/08 License Number 16098

Title Land Surveyor Professional Engineer County Surveyor County Engineer

Northeast Corner Section 7, Township 134 North, Range 30 West

The Department of Natural Resources, Division of Lands and Minerals, contacted the following office for information regarding this corner:

MN Secretary of State
 Cass County Surveyor's Office
 Kramer Leas DeLeo
 Westwood Professional Services
 Widseth Smith Nolting & Associates
 Landecker and Associates

1868 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post in a tamarac swamp and following bearing trees were marked:

Tamarac 8" N 12° E 17 links (11.22')
 Tamarac 7" N 59°W 22 links (14.52')
 Tamarac 6" S 62° E 23 links (15.18')
 Tamarac 7" S 67° W 22 links (14.52')

1916 E.B.Horst set a 2 ½" x 48" iron monument in place of stub of old post. The old post was found from the stumps of the original bearing trees. This is recorded in County Record Book C on page 90. A distance of 5334' is measured to the NE corner section 8 and 5699.6' is measured to the NW corner section 7. The following ties were taken:

Tam. Snag 6" N45°E 32.3'
 Tam. 8" N32°30'W 47.0'
 Tam. Stake S45°W 46.7'
 Tam. Stake S45°E 46.7'

2008 On March 25th, a DNR survey crew went to search for this corner after hearing from the foresters that the corner had been found. The foresters had flagged up the area near the corner and a 2 ½" x 48" iron pipe with a 3" threaded cap was found lying on the side mostly out of the ground. The bottom was about 1' lower than the top. The monument was chipped out of the frozen ground, stood up and pounded down. The monument went down very easy, probably into the same hole the frost had pushed it out of. The crew didn't have the original notes or the resurvey notes with them to check for ties. The logging road used to drive in to look for the corner wasn't very stable and not safe to drive back to look for the ties. The NE corner section 8 bears N89°58'29"E 5330.78', the NE corner section 18 bears S00°24'33"E 5276.75' and the NW corner section 7 (as established by doubling over the line and distance between NW and N Quarter corners section 12, T134, R31) bears N89°06'58"W 5697.83'. Iron pipe was accepted as marking the location of the original corner.

For more information on our survey in this area, please contact MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401