

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST-1/4 Corner of Section 7, Township 136, Range 30, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found _____
- left monument as found, lowered monument, removed monument (explain)
- On 11/15/10 PLACED 1/2" x 16" Iron pipe capped #44530
DATE DOWN 0.5'



SKETCH OF REFERENCE TIES

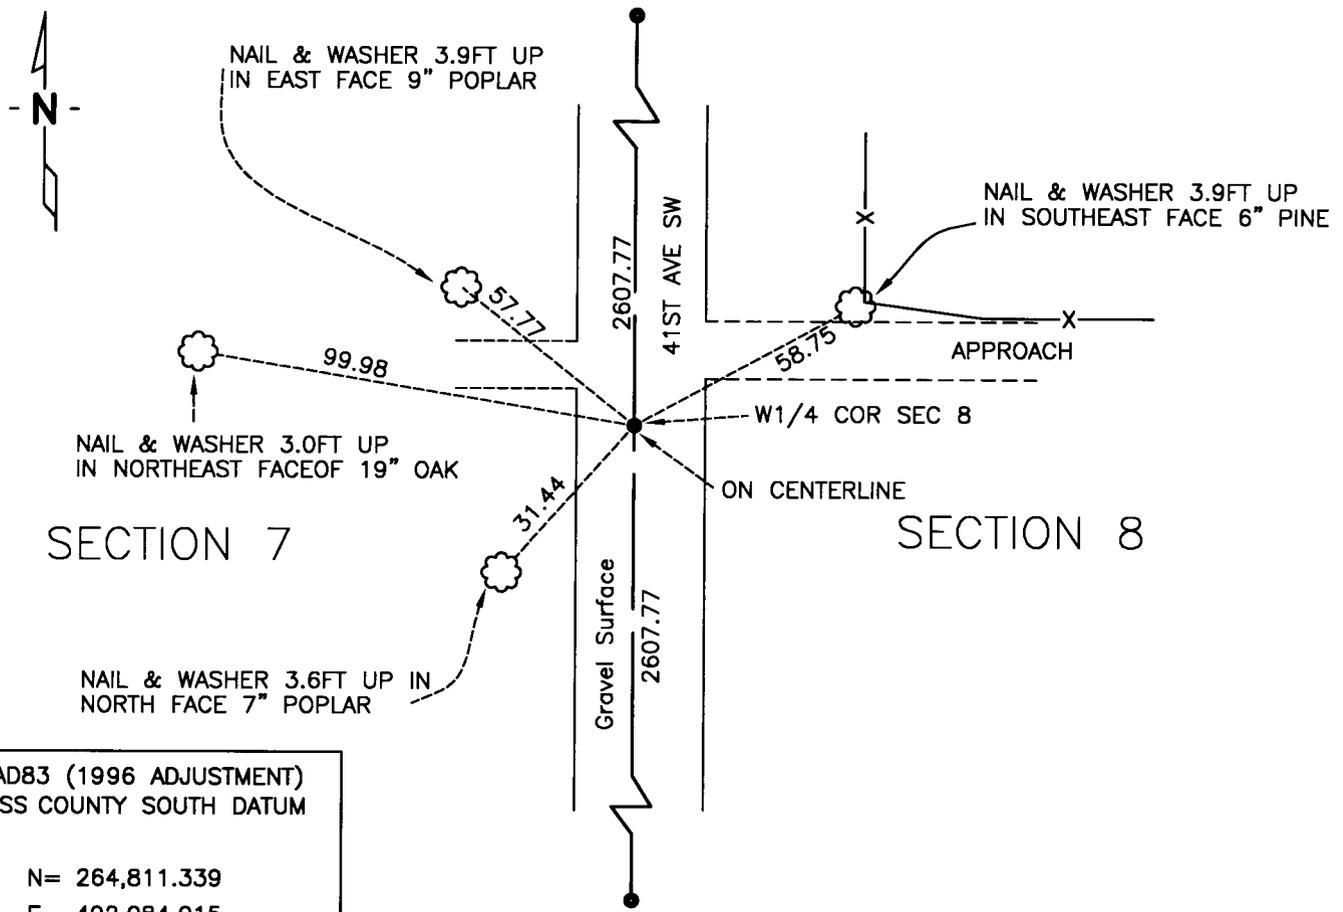

NAD83 (1996 ADJUSTMENT)
 CASS COUNTY SOUTH DATUM

 N= 264,811.339
 E= 492,084.015

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 2/10/11
 SURVEYOR DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:**East Quarter corner of Section 7, Township 136 North, Range 30 West**

Oct. 1870 R. Cronk, GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:

7" J. PineN57°E 31 links (20.46 feet)
8" J. PineS60°W 6 links (3.96 feet)

Nov. 1933 Township Road Order shows no survey.

Nov. 2010 Craig E. Johnson, LS, CFedS, set a 1/2 iron pipe capped No. 44530, 0.5 feet below the surface of the gravel road. The corner was established by single proportion on line and mid way between the NW and SW corners of Section 8. The set pipe was accepted as the corner and ties were taken as depicted on the face of this certificate.

A000568462
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:52:50 AM
AS DOC #: A000568462
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER