

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 31, Township 136, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 11/02/10 found 1/2" IRON PIPE WITH RLS#17008, INSIDE OF 2" IRON PIPE
FLUSH WITH GROUND

left monument as found, lowered monument, removed monument (explain)

On _____ PLACED _____
DATE

SKETCH OF REFERENCE TIES

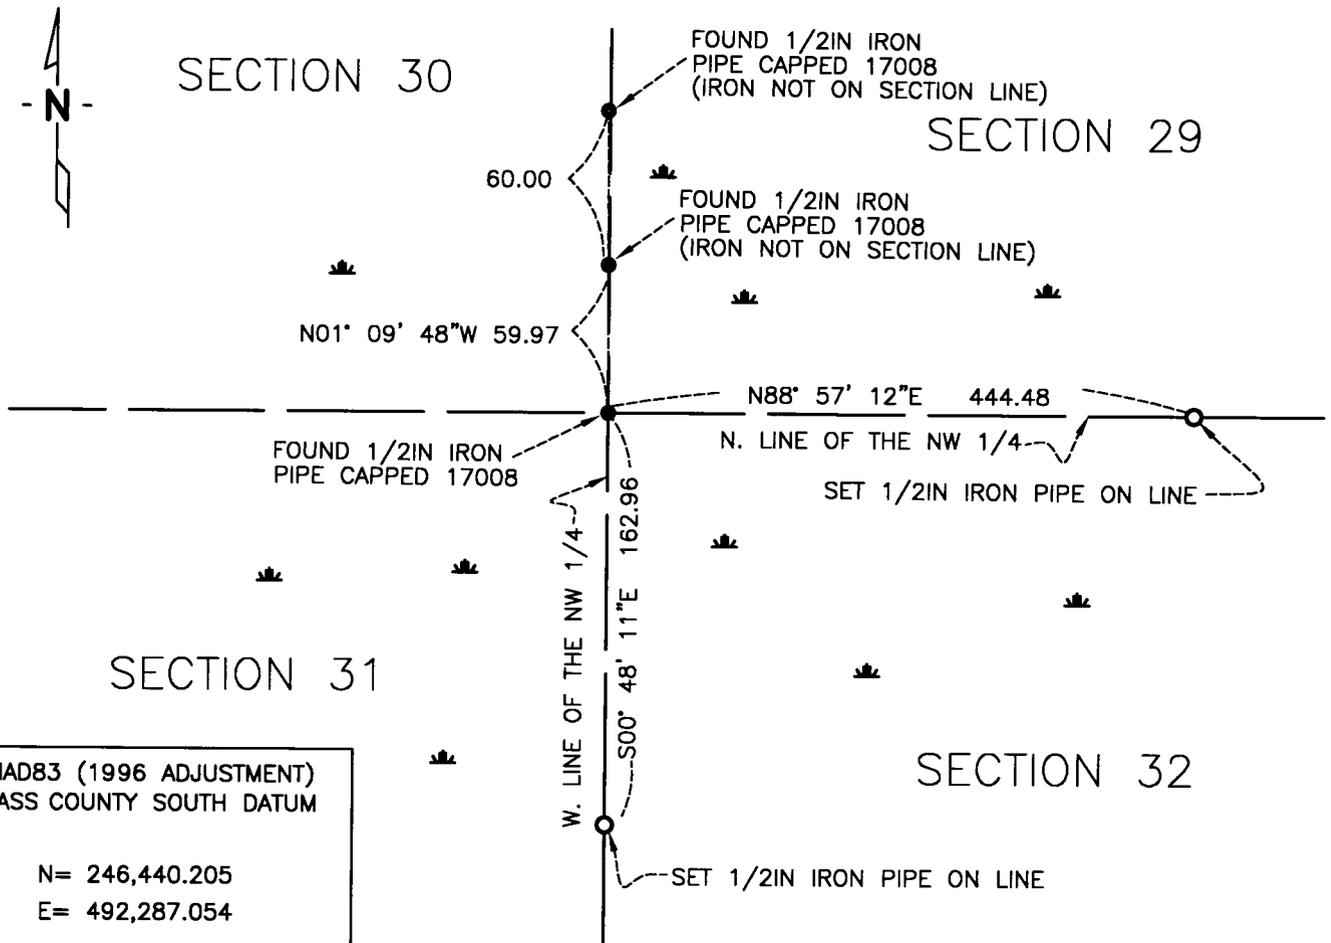

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Chris... SURVEYOR 2/10/11 DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____M. on the _____ day of _____ A.D., 20__

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____



Statement of Evidence:**Northeast corner of Section 31, Township 136 North, Range 30 West**

Oct. 1870 R. Cronk, GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:

| | | |
|----------|-------|-----------------------|
| 12" Tam. | N35°E | 30 links (19.80 feet) |
| 10" Tam. | N21°W | 20 links (13.20 feet) |
| 5" Tam. | S70°E | 40 links (26.40 feet) |
| 6" Tam. | S20°W | 25 links (16.50 feet) |

June 1911 W. H. Luffman prepared a plat of Ferguson's Cartway. He identified the location of the cartway and noted various distances on his sketch and cartway description. Said survey occurred in Section 30 and identifies the East line of said Section 30.

2001 James Nielsen, LS 11865, while surveying in Section 29, computed this corner in the obliterated position using evidence of the existing roadway, occupation and topography along the West line of said Section 29.

April 2002 David S. Landecker, LS 17008, while surveying in Section 31, agreed with the Nielson's analysis and theory for establishing this corner. Landecker accepted this corner to be a perpetuation of the original corner and set a 2" iron pipe over a 1/2" pipe capped 17008, Landecker set two reference irons pipe 60 and 120.00 feet northerly of said corner, (Landecker Project No. 011193).

Jan. 2004 John Walker, LS 18098, used Nielsen's computed position for the SW corner of Section 29 during a survey of the Stoney Brook Fisheries Management Area for the Minnesota DNR, (DNR file no. FMA00508).

Nov. 2010 Craig E. Johnson, LS, CFedS, 44530, while surveying in Section 32, found Landecker's 1/2" pipe capped 17008, inside of a 2" pipe, Johnson accepted Landecker's pipe as the Section corner and set additional reference irons on the section lines East and South of said corner as depicted on the face of this certificate.

A000568468
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:52:56 AM
AS DOC #: A000568468
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER