

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Trottier*

Patrick A. Trottier

Date: 2-14-2011 License No: 41002  
41002

**A000568495**

**OFFICE OF COUNTY RECORDER  
 CASS COUNTY MINNESOTA  
 CERTIFIED, FILED, AND/OR  
 RECORDED ON  
 02/23/2011 07:53:23 AM  
 AS DOC #: A000568495  
 PAGES: 2 REC FEES: 0.00  
 KATHRYN M. NORBY  
 COUNTY RECORDER**

NORTH QUARTER Corner of Section 30, Township 138, Range 30, 5th P.M.

On 11-22-2010 found a 1/2"Ø IRON PIPE W/ CAP #17253


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

## SKETCH OF REFERENCE TIES

Corner Index: **R-3**

Not to Scale

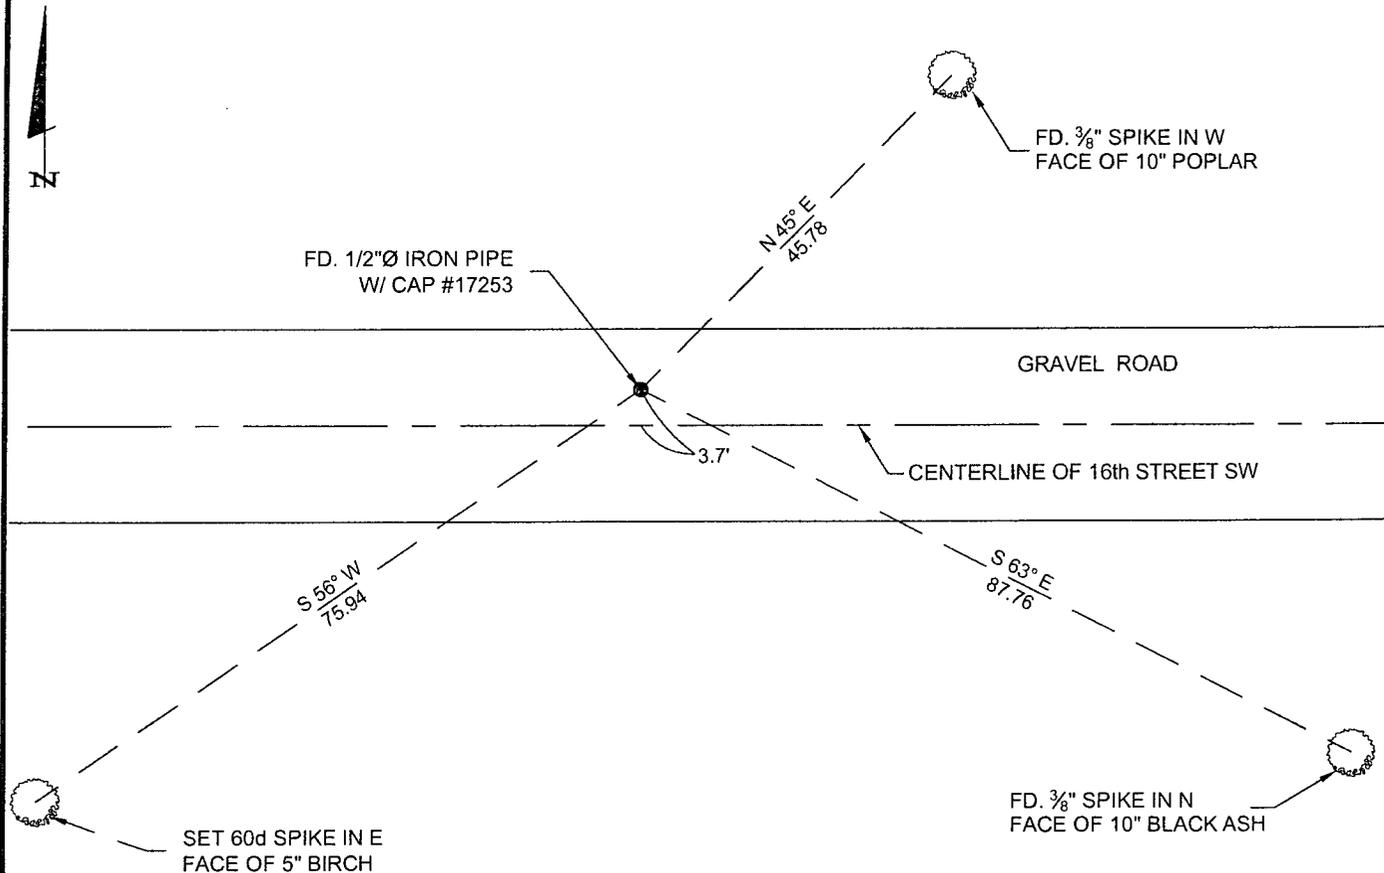

Statement of evidence for this corner position is on the back of this page



**Statement of Evidence**

**North quarter corner, Section 30, Township 138 North, Range  
30 West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1865 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

7" Fir	S 7° W	16 links
8" Bl. Ash	N 45° W	9 links

1914 – John Curo performed a survey of the north line of Section 30 as recorded in County Survey Record Book "B", pages 108-114, Survey Record No. 265, and in Curo book 90, page 22. Curo searched for and found no evidence of this corner. Curo set a 2" x 48" galvanized iron pipe by proportional method at this corner from which the following witnesses were recorded:

7" J. Pine	N 47°30' E	267.70 feet
4" Oak	N 66°30' W	82.30 feet

2005 – Bruce Grivna, RLS 17253, performed an extensive survey in Section 19. The South quarter corner of Section 19 was treated as a lost corner and its position established by single proportion method utilizing the found and accepted SE and SW corners of Section 19. A ½" iron with plastic cap stamped "RLS 17253" was placed at the position.

2010 – Patrick Trottier, PLS 41002, reviewed and agreed with the 2003 proration, found and accepted the ½" iron with plastic cap stamped "RLS 17253" set as North quarter corner of Section 30, from which the following witnesses were established:

10" Poplar	N 45° E	45.78 feet
5" Birch	S 56° W	75.94 feet
10" Black Ash	S 63° E	87.76 feet