

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

A000568496
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:53:24 AM
AS DOC #: A000568496
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER

Patrick A. Trottier

Patrick A. Trottier

Date: 2-14-2011 License No: 41002
41002




_____NORTHEAST____ Corner of Section 30, Township 138, Range 30, 5th P.M.

- On 11-22-2010 found a 1/2"Ø IRON PIPE W/CAP #17768
- left monument as found,
 lowered monument,
 removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: **R-5**

Not to Scale

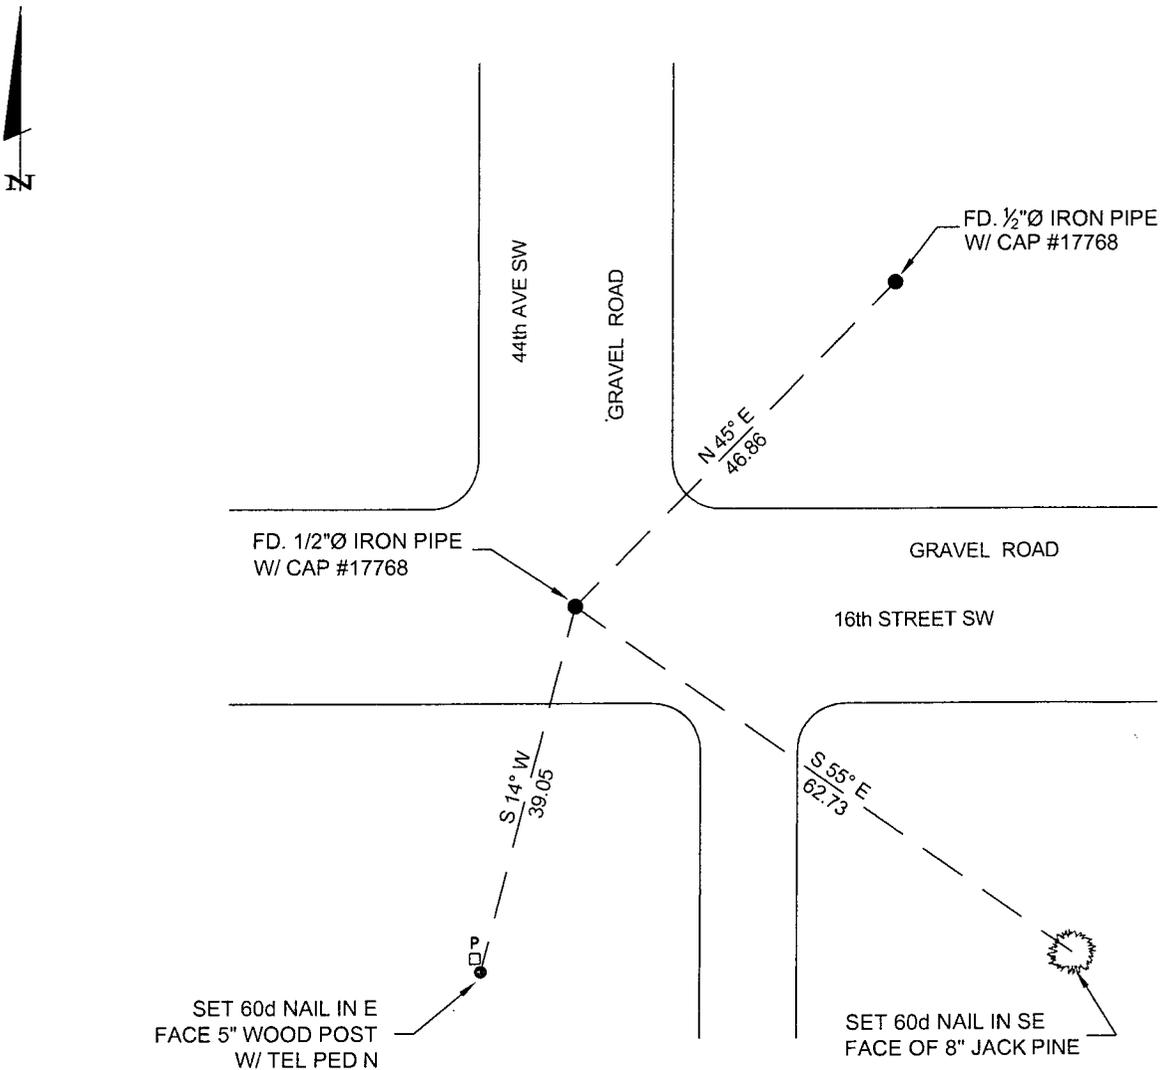

Statement of evidence for this corner position is on the back of this page

Statement of Evidence

**Northeast corner, Section 30, Township 138 North, Range 30
West, 5th Principal Meridian, Cass County, Minnesota**

1865 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

8" Bl. Pine	N 5° E	77 links
10" Bl. Pine	N 52° W	60 links
9" Bl. Pine	S 47° E	30 links
14" Bl. Pine	S 54° W	96 links

1914 – John Curo performed a survey as recorded in County Survey Record Book "B", pages 30-31, and Survey Record No. 242. Curo found stumps of the four witnesses listed above and set a 1 $\frac{3}{4}$ " x 48" galvanized iron as the corner from which the following witnesses were established:

12" J. Pine	S 20°30' W	43.78 feet
9" J. Pine	S 83° W	47.34 feet
3" J. Pine	N 34° W	40.76 feet

1915 – Gorman found iron as noted in Curo book 90, page 12.

1920 – Lincoln Mackey found iron as part of survey as recorded in County Survey Record Book "C", page 363, and Survey Record No. 440.

2005 – Bruce Grivna, RLS 17253, performed an extensive survey in Section 19. Notes reflect a found 3/8" rebar at this corner.

2007 - Bruce W. Skipton, RLS 17768, performed a survey in Section 20 of said township. Certificate of Survey signed by Skipton and dated 7-27-07 shows a 1/2" x 14" iron pipe set and marked with RLS 17768 cap as corner. Position of corner coincides with mathematical calls for produced corner from Grivna notes.

2010 – Patrick Trottier, PLS 41002, found and accepted the 1/2" iron with plastic cap stamped "RLS 17768" set as corner, from which the following witnesses were recorded:

1/2" iron pipe	N 45° E	46.86 feet
5" wood post	S 14° W	39.05 feet
8" Jack Pine	S 55° E	62.73 feet