

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast corner of Section 36, Township 145 N., Range 31 W., 5th P.M.  
 State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 05-04-2011 found a 6" diameter concrete cylinder with a 3.5" diameter GLO brass cap,  
flush with the surface grade.


left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

8 0 3 2 9 2 3  
 TX: 4023348



## SKETCH OF REFERENCE TIES (NOT TO SCALE)

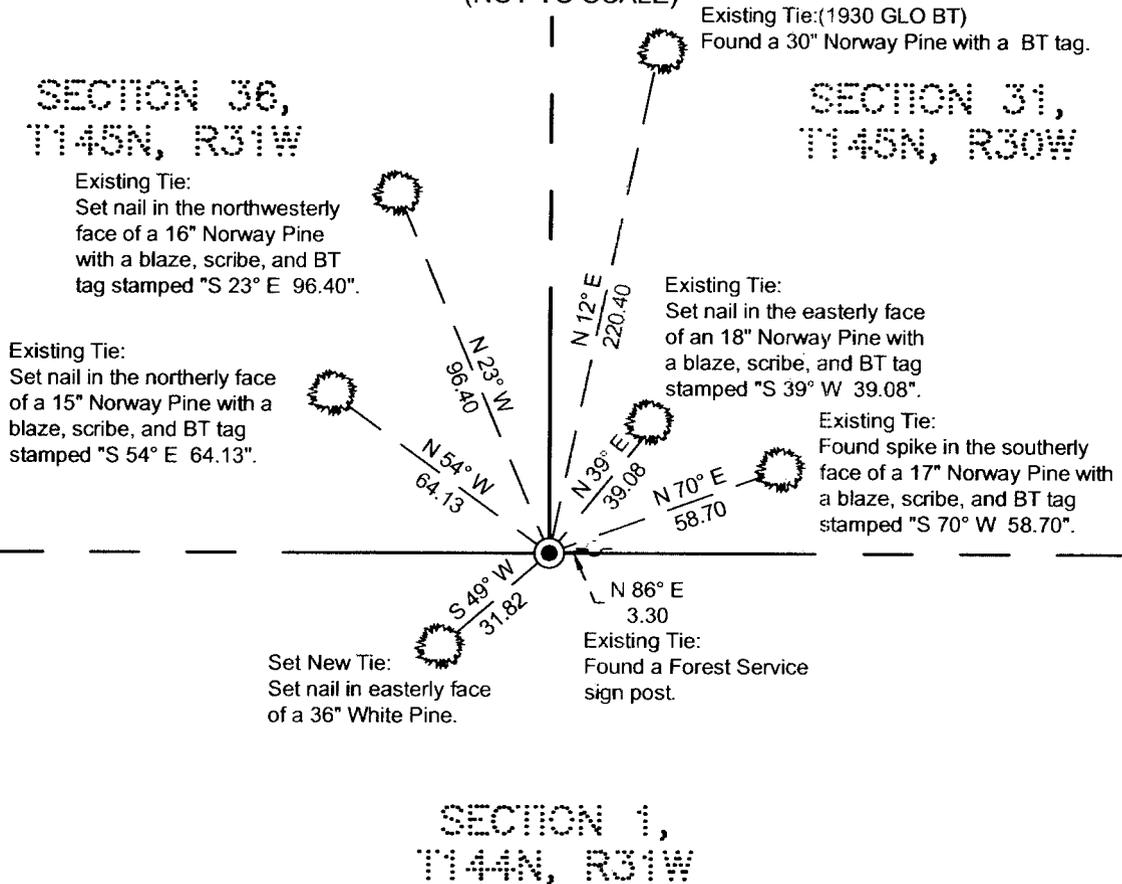

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman, Land Surveyor

Date 12/13/11

MN License No. 21367

**A000578288**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**03/01/2012 2:29:24 PM**  
**AS DOC #: A000578288**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**

Index No.     Z.0 - 25.0    

**STATEMENT ON EVIDENCE**

**Standard Southeast Corner of Section 36, Township 145 North, Range 31 West of the 5th Principal Meridian.**

**In 1871**, G.R. Stuntz, U.S. Deputy Surveyor, set a wood post in place to mark the location of this corner and established bearing trees as follows: a 25" Yellow Pine, N20°E 53 links; a 20" Yellow Pine, N46°W 87 links.

**In 1930**, H. Craig, United States Surveyor, made a dependent resurvey part of the south boundary of Township 145 North, and found the original BTs. He set a 6" x 26" concrete monument with brass cap, and recorded two new BTs: a 14" Norway Pine, N12 1/4°E 334 links; a 4" Jack Pine, N31 1/2°W 303 links. Information on file in the Cass County Surveyors office.

**On November 23, 1983**, Curt Krause and Gary Brama, U.S.F.S. personnel found the brass cap in concrete and the 1930 GLO northeast BT and stump of northwest BT. They marked new BT's: 11" Norway Pine, N54°W, 64.13 feet; 11" Norway Pine, N23°W, 96.40 feet; 15" Norway Pine, N39°E, 39.08 feet; and a 15" Norway Pine, N70°E, 58.70 feet. Information on file in the U.S.F.S. Cass Lake office T145N R31W Book 1, page 22.

**On May 4, 2011**, a Northern Engineering & Consulting survey crew found a 6" concrete cylinder, with a 3/4" GLO brass cap, flush to surface grade. The northeast 1933 BT was found, all four 1983 ties were found, and one new tie was set as shown on the front page of this certificate. The found concrete cylinder with brass cap is accepted as a perpetuation of the original corner.

**Minnesota State Plane (Central Zone)**

Northing 1175491.816  
Easting 2551697.341

**County Coordinates (Cass County North)**

Northing 289750.395  
Easting 418763.175

