

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 24

Township 145 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, COUNTY OF CASS.

**A000581293**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**06/12/2012 11:25:31 AM**  
**AS DOC #: A000581293**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**

037289  
Tx: 4026798

On 3-24-11, found a(n): 2 1/2" galvanized pipe  
DATE  
 with a cap leaning to the west. Located position at base  
 of pipe.


- left monument as found       lowered monument  
 removed monument (explain)       raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_  
DATE

(reserved for recording data)

See "Statement of Evidence" for further details (on back)


GPS I.D.: \_\_\_\_\_ Co. Proj. No.: \_\_\_\_\_

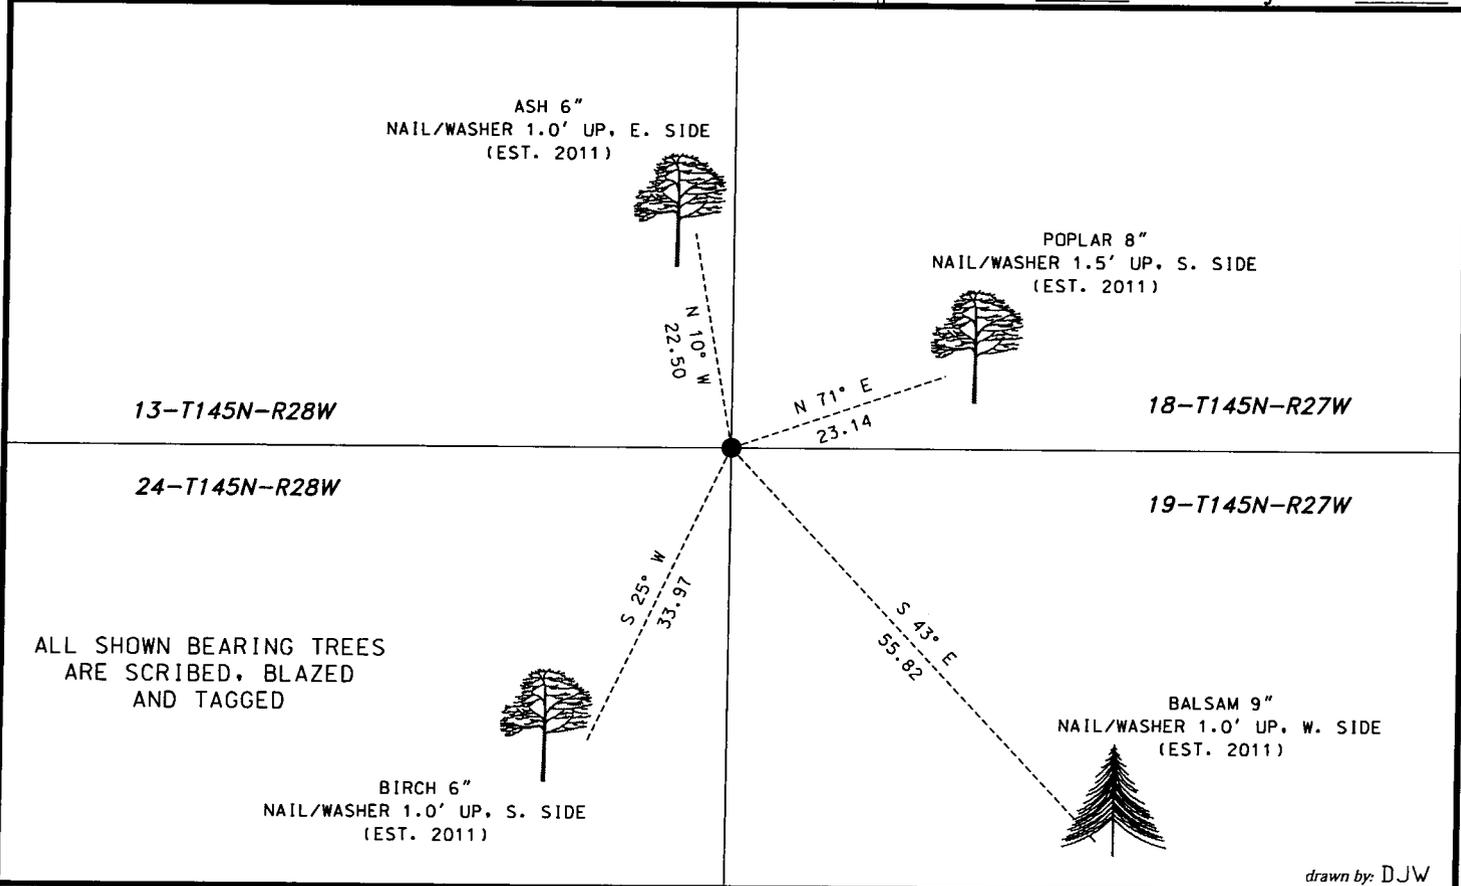

drawn by: DJW

## "SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

NAD 83 Latitude (N):	47°22'09.960"
Longitude (W):	94°09'47.691"
CCNZC 83 Northing:	306395.33
Easting:	513238.26
NAD 83 S.P. Northing:	1192178.77
(Central) Easting:	2646165.88

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Dennis J. Warner*  
signature

5/10/2012  
date

License No. 42656

Printed Name: Dennis J. Warner

County Surveyor       Land Surveyor

STATEMENT OF EVIDENCE: Northeast Corner of Section 24, T145N, R28 West of the 5<sup>th</sup> Principal Meridian.

1873 This corner was established by P.H. Conger, Deputy Surveyor, in the township boundary survey. His notes indicate a post was placed at the Section Corner and established witnesses as follows:

Cedar	8"	N42E	26 links	(17.16 feet)
Yellow Pine	18"	S23W	60 links	(39.6 feet)
Balsam		N40W	11 links	(7.26 feet)
Poplar	14"	S28 1/2 E	32 links	(21.12 feet)

1900 The U.S. Army Corps of Engineers Lake Winnibigoshish Reservoir map indicates the corner to be a known section corner. Map on file with the USFS office in Cass Lake.

1912 John Curo, Cass County Surveyor, Book A, pages 544-550, visited the corner and found the following:

Gov't Cedar windfall with scribe visible		N42E	17.16 feet	
Gov't Pine	18"	S23W	39.60 feet	scribe visible
Gov't Balsam windfall with scribe visible		N40W	7.26 feet	
Gov't Poplar stump		S28 30'E	21.12 feet	

Mr. Curo set a 2 1/2" x 48" iron pipe with a 3" cap and anchor rod through the bottom and makes note of the following witnesses:

Poplar	10"	N56W	29.20 feet
Orig. Y. Pine	18"	S23W	39.60 feet
N. Pine	24"	S51E	36.93 feet
Birch	4"	N47E	10.26 feet

1928 D.F. Kirkmire, USFS personnel, Book 1, 145-28, on file in Cass Lake, visited the corner and states that he found the 2 1/2" iron pipe set by Curo and makes note of the following:

Found Aspen (dead)	10"	N60W	42 links	(27.72 feet)	scribed
Found Norway Pine windfall	19"	S50E	63 links	(41.58 feet)	scribed
Set a FSLP on Aspen	5"	N60W	3 links	(1.98 feet)	on SE side

1955 Curo, Book 245, Page 37, sketch showing iron monument in place.

2011 Personnel from Short Elliott Hendrickson found the 1912 monument set by Curo but were not able to locate any witnesses. Witnesses were established as shown on the face of this certificate. An analysis of the record information and field evidence supports this monument as the best evidence of the corner position.