



A000583775

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/6/2012 8:42:10 AM

AS DOC #: A000583775

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER  
BY SR \_\_\_\_\_ Dep


Index Number Z-25

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 36, Township 137, Range 32  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 5-16-11 found a 2.5" IP with plumbers cap up 1.2'
- left monument as found
- lowered monument
- removed monument (explain)
- On 5-16-11 placed an Rebar with 3.5" brass cap. Stamped Cass Cty RLS 43932. Moved 2.5" IP 0.5' East. Set Flash.

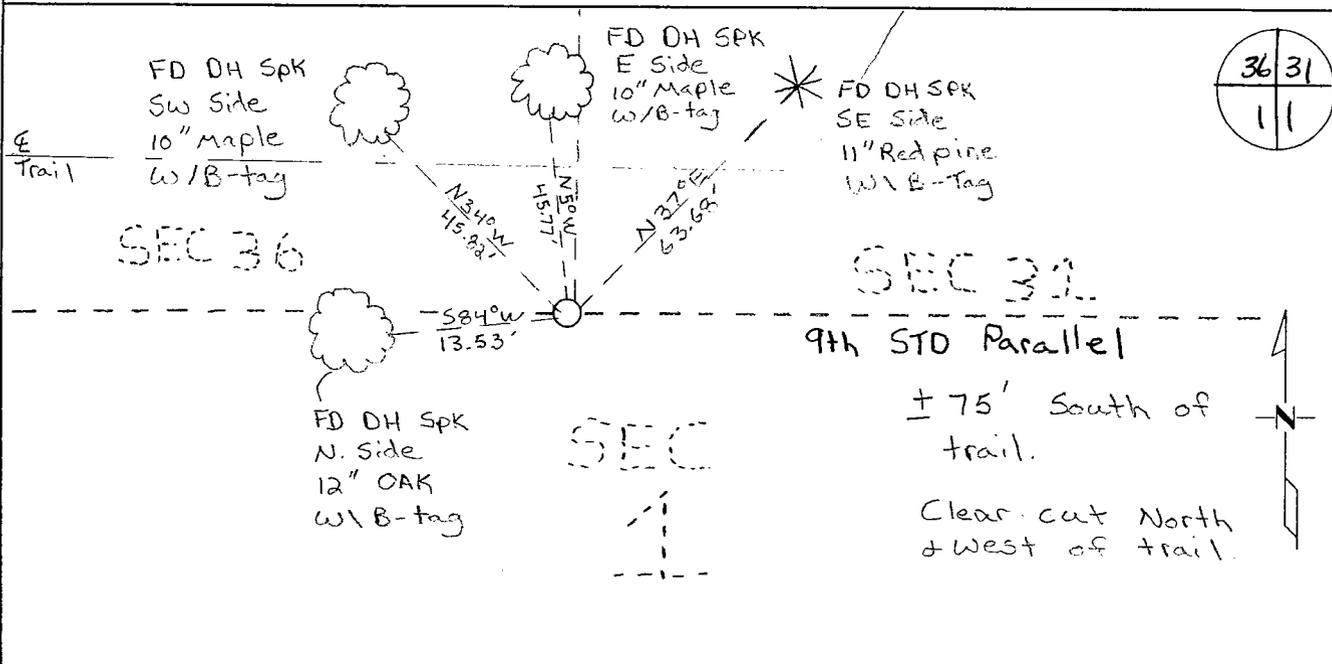

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature \_\_\_\_\_

Chris Hoglund, PS  
License No. 43932

Date: 6/13/12





**Statement of Evidence:**

Standard Southeast Corner of Section 36, Township 137 North, Range 32 West, Ansel Township, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota.

1858 Original US General Land Office survey by H. Mellen, set wood post.

15" Aspen	N56°15'E	19 links
11" W Birch	N20°W	69 links

1913 John Curo, County Surveyor, found a stake with nail he set 8 years prior from original bearing trees. Removed stake and replaced with 2 ½ x 48" galv. iron pipe w/cap. Survey is filed in County Survey Record Book "A", page 592-604. He noted ties:

Pine Stump	N 22°15' E	56.80 feet
6" Poplar	N 15° W	62.10 feet

1917 E.B Horst found the Curo monument and original bearing tree in place. Survey filed in Curo Book 076, Page 45.

2003 Cass County Surveyors Office found 2 ½" ODIP with plumber cap, up 1.2 feet, 75 feet +/- south of trail. Reference ties:

8" Maple	N 34° W	45.82 feet
8" Maple	N 5° W	45.77 feet
9" Pine	N 37° E	63.66 feet
8" White Oak	S 84° W	13.53 feet

2011 Westwood Professional Services, Inc. found 2 ½" x 48" iron pipe with cap and all four 2003 Cass County reference ties. Set a 5/8"x24" rebar with 3.5" cap in the same location as found pipe, leaving found pipe as memorial next to set monument. Accepted found monument as being the 1913 Curo Monument, which was a perpetuation of the original GLO Survey. Located set monument with VRS GPS observation, coordinates agree with 2003 Cass County data. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument found by Westwood Professional Services, Inc is the correct perpetuation of this corner.

Cass County Coordinates South Zone obtained by static GPS (NAD 83, 1996 Adj.)  
 N: 272866.05  
 E: 451317.94

Central State Plane Coordinate  
 N: 922811.96  
 E: 2521558.46