



A000583778

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2012 8:42:13 AM

AS DOC #: A000583778

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


Index Number 2-13

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 33, Township 137, Range 29
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 2/18/11 found a Telspar Monument (2" x 2" Alum)
- left monument as found
- lowered monument
- removed monument (explain)
- On 2/18/11 placed on 3.5" Brass Cap on a 2 Ft long rebar. Stamped CASS CTY RLS 43932

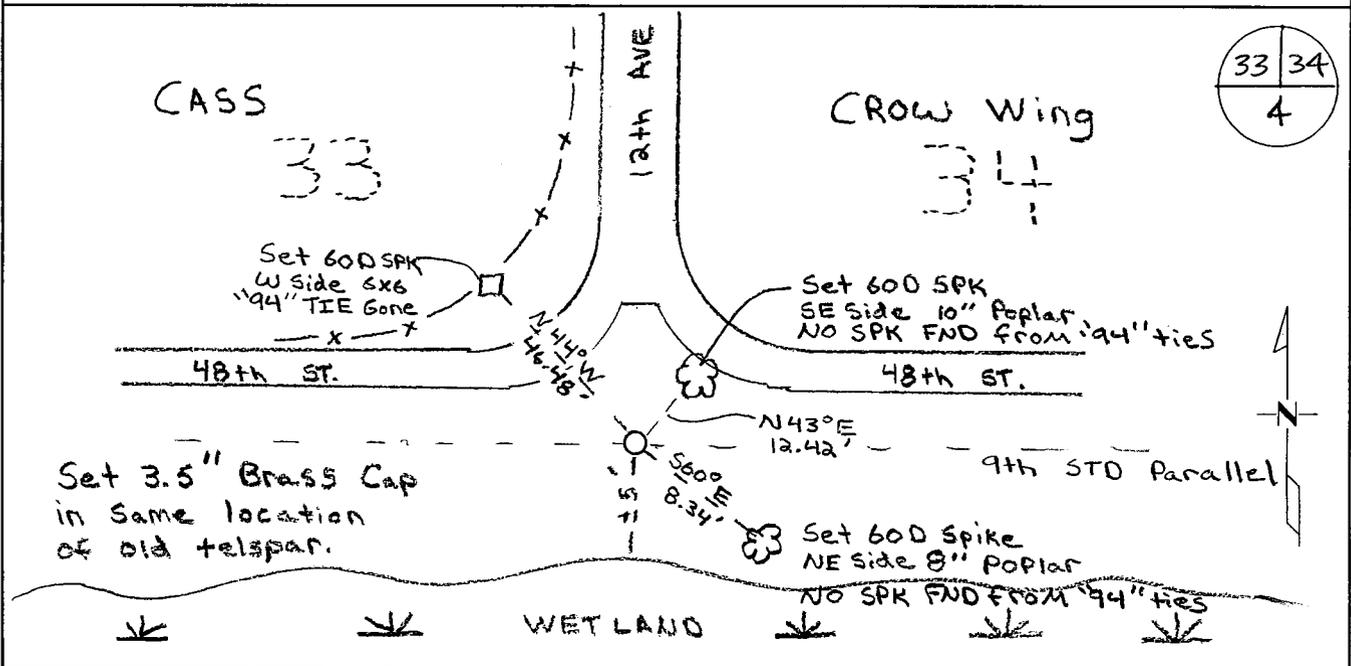

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature
Chris Hoglund, PS
License No. 43932

Date: 6/13/12





Statement of Evidence:

Southeast Corner of Section 33, Township 137 North, Range 29 West, Wilson Township, 5th Principal Meridian, Cass County, Minnesota.

1858 Original US General Land Office survey by T.B. Walker, set a wood post and bearing trees noted as:
 12" Pine N 65° E 230 links
 20" Pine N 11° W 643 links

1910 John Curo, Cass County Surveyor, refernces 8x8x36" cement post, referenced in County Survey Record Book "A", Page 318-328, Survey Record No. 156.

1916 E. B. Horst found corner set by Curo, referenced in Curo Book 76, Page 2.

1981 Myron Landecker, PS 7452, did not find a monument in place, filed in Crow Wing County Book S104, Page 68.

1989 Walt Curo, LS 11309, set monument for survey in Section 33, entry derived from document number 477948.

1994 T. Kerick, Crow Wing County Surveyor – no monument, found hole where monument was pulled out from at Walt Curo's position. Set 2"x36" Telspar with Alum. Cap, filed as Certificate Number 733, recorded as document number 477948. Reference ties:

6" Poplar	N 65° E	39.30 feet
3" Poplar	N 40° E	12.45 feet
4" Poplar	S 38° E	8.28 feet

1998 Cass County Surveyors Office found Alum. Cap monument and 1994 witnesses.

2002 Cass County Surveyors Office found Alum Cap, Telspar, up 0.6 near PI of road - located with GPS. Coordinates as follows from Cass County South 1996 adjustment:
 N: 273243.093 E: 530478.882

2008 Don Sigety, Crow Wing County Surveyor, found Crow Wing County Aluminum Capped Monument in Place, filed in Book 128, Page 37. Coordinates as follows from Crow Wing County 1986 adjustment.
 N: 273242.542 E: 530479.637

2011 Westwood Professional Services, Inc. found a Telspar Monument and 2 1994 Kerick Ties. Accepted found Monument as the best available evidence for corner. Set 24" rebar with 3.5" brass cap and buried Telspar Monument. Located set monument with a 20 minutes static GPS shot and verified coordinates with VRS GPS observation. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument found by Westwood Professional Services, Inc, is the best available evidence for this corner.

Cass County Coordinates South Zone obtained by static GPS (NAD 83, 1996 Adj)
 N: 273243.17
 E: 530478.84

Central State Plane Coordinate:
 N: 922972.61
 E: 2600710.34