




That in order to make the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER a matter of public record and locatable by legal description, Affiant does herewith attach said document to this affidavit and requests the Cass County Recorder to record same at her earliest opportunity.

FURTHER, Affiant sayeth not.



Robert Kovanen, Cass County Surveyor

Subscribed and sworn to before me
this 27 day of February, 2013.



Notary Public



This instrument was drafted by:

Robert Kovanen
Cass County Surveyor
P.O. Box 579
Walker, MN 56484

AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER

Corner to Sec. 7-8-17-18 T. 145 N R. 29 W No. 30

State of Minnesota, }
County of Cass } ss.

Peter J. Meyer, being first duly sworn, deposes and says:
That I reside at Cass Lake, Minnesota, and am registered as a Land Surveyor under the laws of the State of Minnesota, having Surveyor's Registration Certificate No. 3628
I further depose and say that on the 5th day of August, 1958,
I found the section corner of sections 7-8-17-18
which was evidenced by two remaining scribed bearing trees of the Government Survey of 1874.
(a) 12 inch White Pine (now 16 inch stump with scribing S17 visible) S 21° E, 38 links or 25.1 feet.
(b) 10 inch White Pine (now 15 inch stump with scribing visible) N 5° E, 16 links or 10.6 feet. NOTE: This bearing tree tipped and moved about 5 feet from original standing location by bulldozer clearing road. Monument placed on bearing and distance from bearing tree "a" above.

and that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of a 2 inch inside diameter, 5 foot long galvanized, wrought iron pipe filled with concrete and capped with a 3 inch diameter bronze tablet stamped:

T 145 N R 29 W
S 7 : S 8
S 18 : S 17

1958 R.L.S. No. 3628

from which reference or witness monuments are located in the manner following:

16 inch Red Pine	N 89 $\frac{1}{2}$ ° W	40.7 feet	marked T145, R29, S 7	B.T.
12 inch Jack Pine	N 18° W	67.4 feet	marked T145, R29, S 7	B.T.
6 inch Jack Pine	N 13° E	49.3 feet	marked T145, R29, S 8	B.T.
7 inch White Pine	S 89 $\frac{1}{2}$ ° E	65.9 feet	marked T145, R29, S17	B.T.

All reference bearings are true bearings.

Peter J. Meyer
(Surveyor's Signature)

In the Presence of:

Beulah Devaier
L. P. Peterson

Subscribed and sworn to before me at

Walker, Minnesota

the 11th day of June, 1960

Beulah Devaier

Notary Public

Deputy Register of Deeds

OFFICE OF REGISTER OF DEEDS

County of Cass


I hereby certify that the within instrument was filed in this office for record on the 11th day of June A.D., 1960 at 9 o'clock A.M.

Leonard P. Peterson
Register of Deeds

By Deputy



SECTION _____ TOWNSHIP _____ RANGE _____ P.M. _____

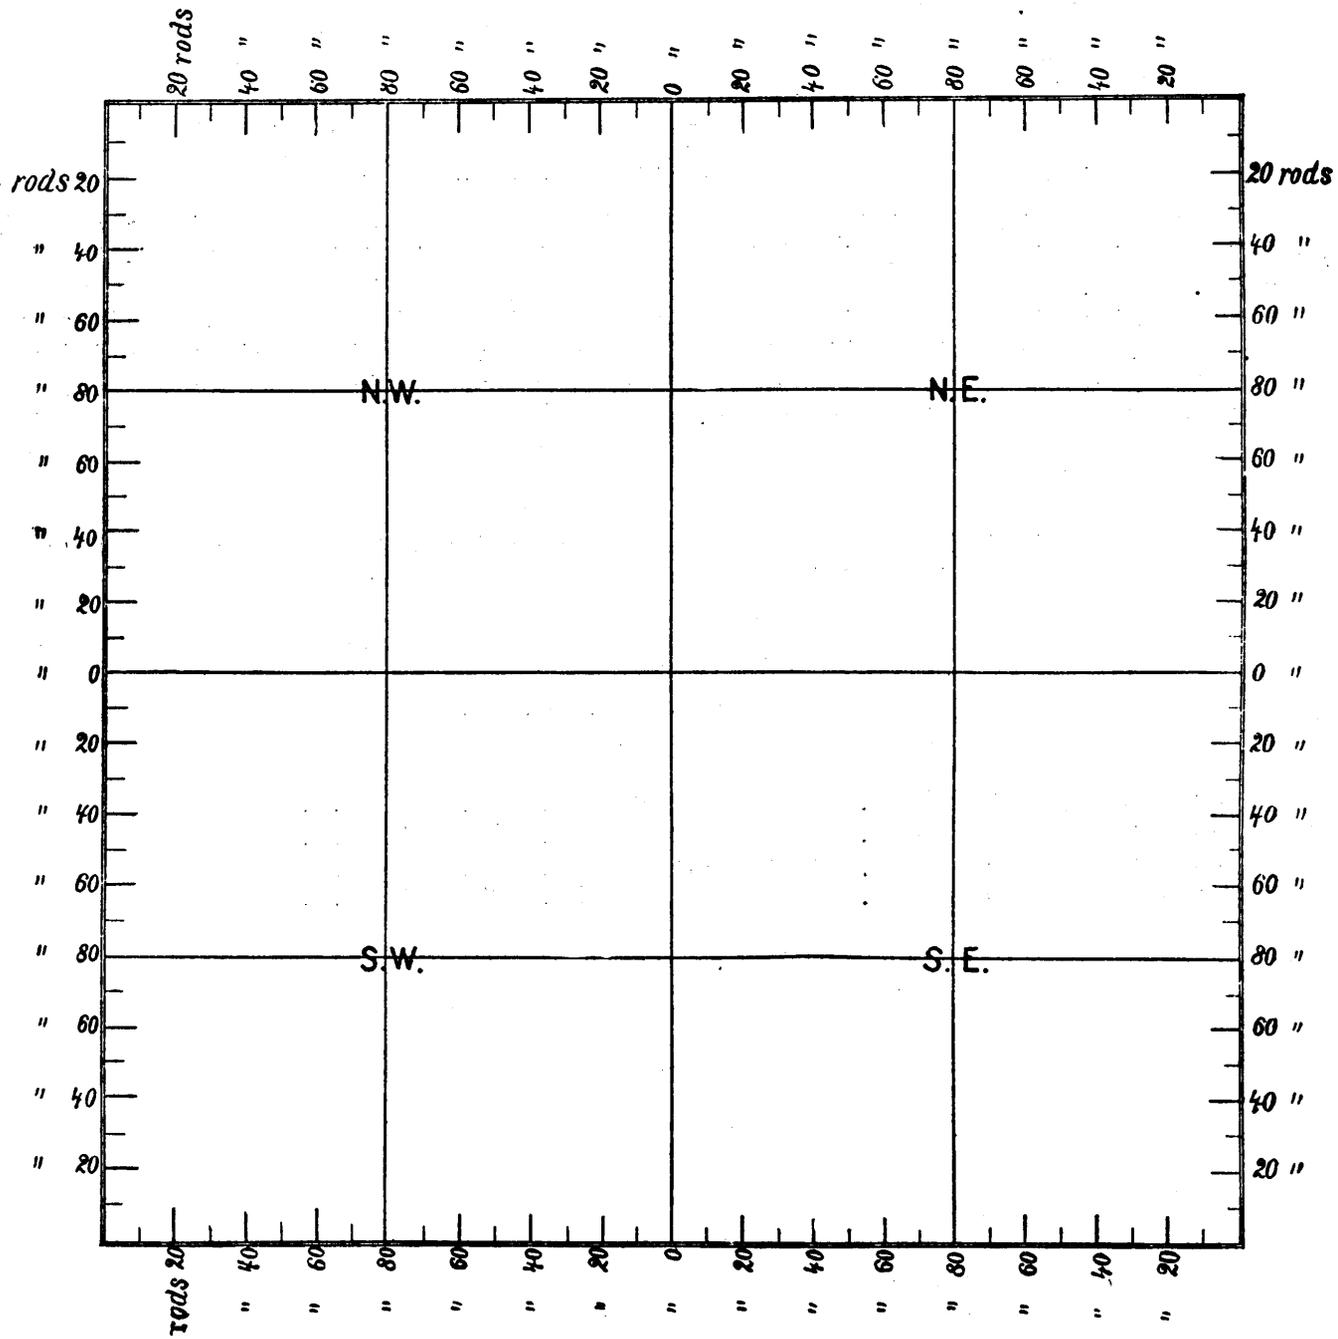

5
5

5
5