

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 32
 Township 139 N, Range 28 W, 5th P.M.
 STATE OF MINNESOTA, COUNTY OF Cass



A000591550

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

4/15/2013 10:53:20 AM

AS DOC #: A000591550

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR Dep


On 12/5/2012, found a(n): 2" Square Iron Monument Down
0.3' and 2'± South of C.

- left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

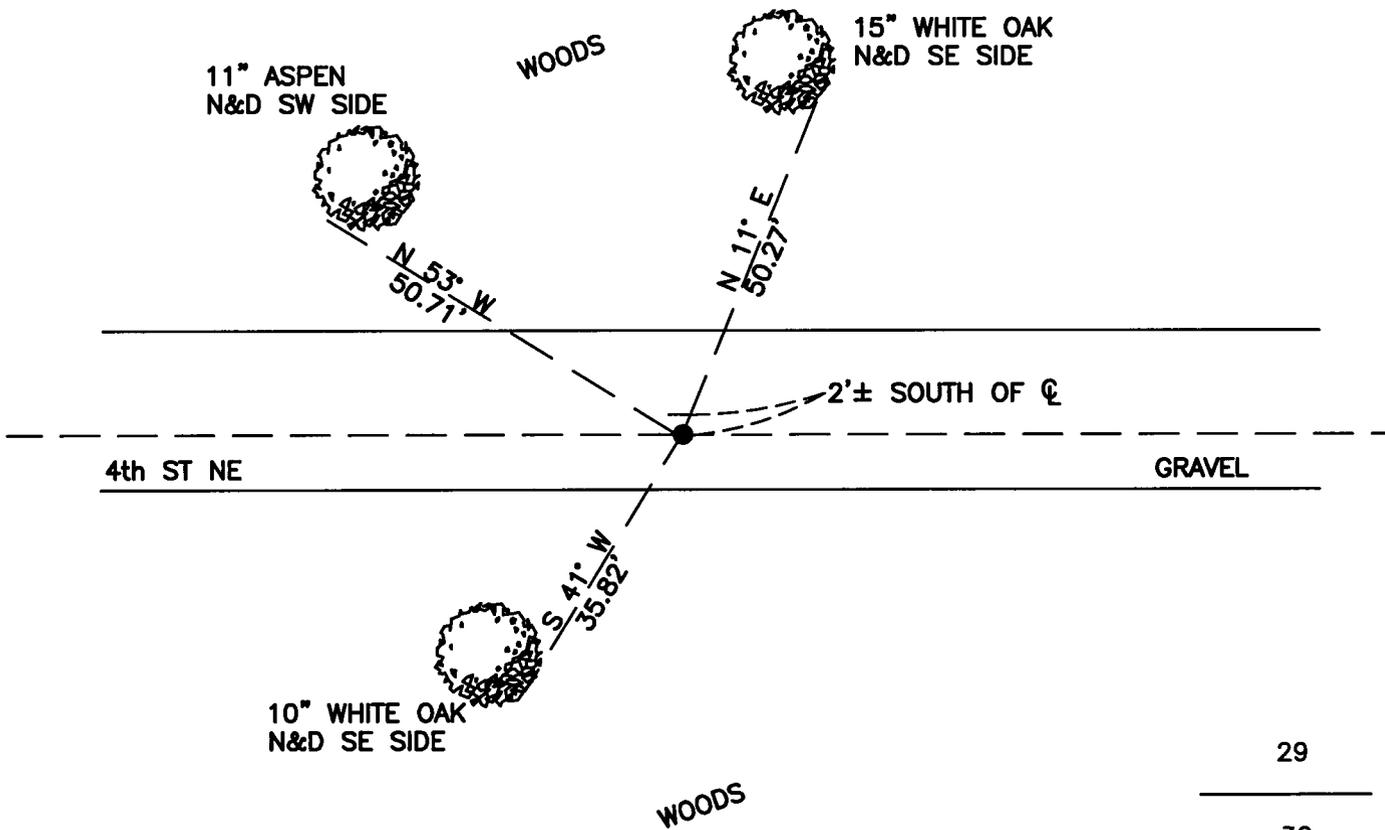

29

32

"SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 341928.027

Easting: 554508.301

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

3-21-13
 date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000591550

Statement of Evidence

North Quarter corner of Section 32, Township 139 North, Range 28 West, 5th Principal Meridian.

- 1864 The US General Land Office, in the notes of the subdivision of Township 139 North, Range 29 West set a post for the original corner and referenced it as follows:
15" Aspen N 50° E 21 links 12" Aspen S 21° E 11 links
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- 1918 Ben Clark, RLS 231, Survey Record 434, Book C, Page 304, on file in the CCSO, indicates finding the corner and is witnessed by the following:
8" J. Pine 67° W 37.6 feet 6" Poplar N 24° W 20.9 feet
- 1919 Ben Clark, RLS 231, Survey Record 434, Book C, Page 336, on file in the CCSO, indicates an IP was set, stating, "then set an iron pipe 4 ft long 2 in. diam."
- 1939 The corner card for this corner on file at the CCSO, indicates the CCC Washburn Lake field book no. 12, page 33 set an approximate corner, stating, "at 2640' from W – set approx. cor." KLJ attempts to locate the CCC field books or copies were unsuccessful.
- 2012 A KLJ survey crew found a 2" square iron monument, and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

