

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 32  
 Township 139 N , Range 28 W , 5th P.M.  
 STATE OF MINNESOTA, COUNTY OF Cass



**A000591557**

OFFICE OF THE COUNTY RECORDER  
 CASS COUNTY, MINNESOTA  
 CERTIFIED, FILED, AND/OR  
 RECORDED ON

4/15/2013 10:53:27 AM

AS DOC #: **A000591557**  
 PAGES: 2  
 REC FEES: 0.00

**KATHRYN M. NORBY**  
 CASS COUNTY RECORDER  
 BY SR Dep

On 12/14/2012, found a(n): 2 1/2" Capped Iron Pipe, up 0.2'  
DATE


- left monument as found       lowered monument  
 removed monument (explain)       raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_  
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

Page 1 of 2 A000591557

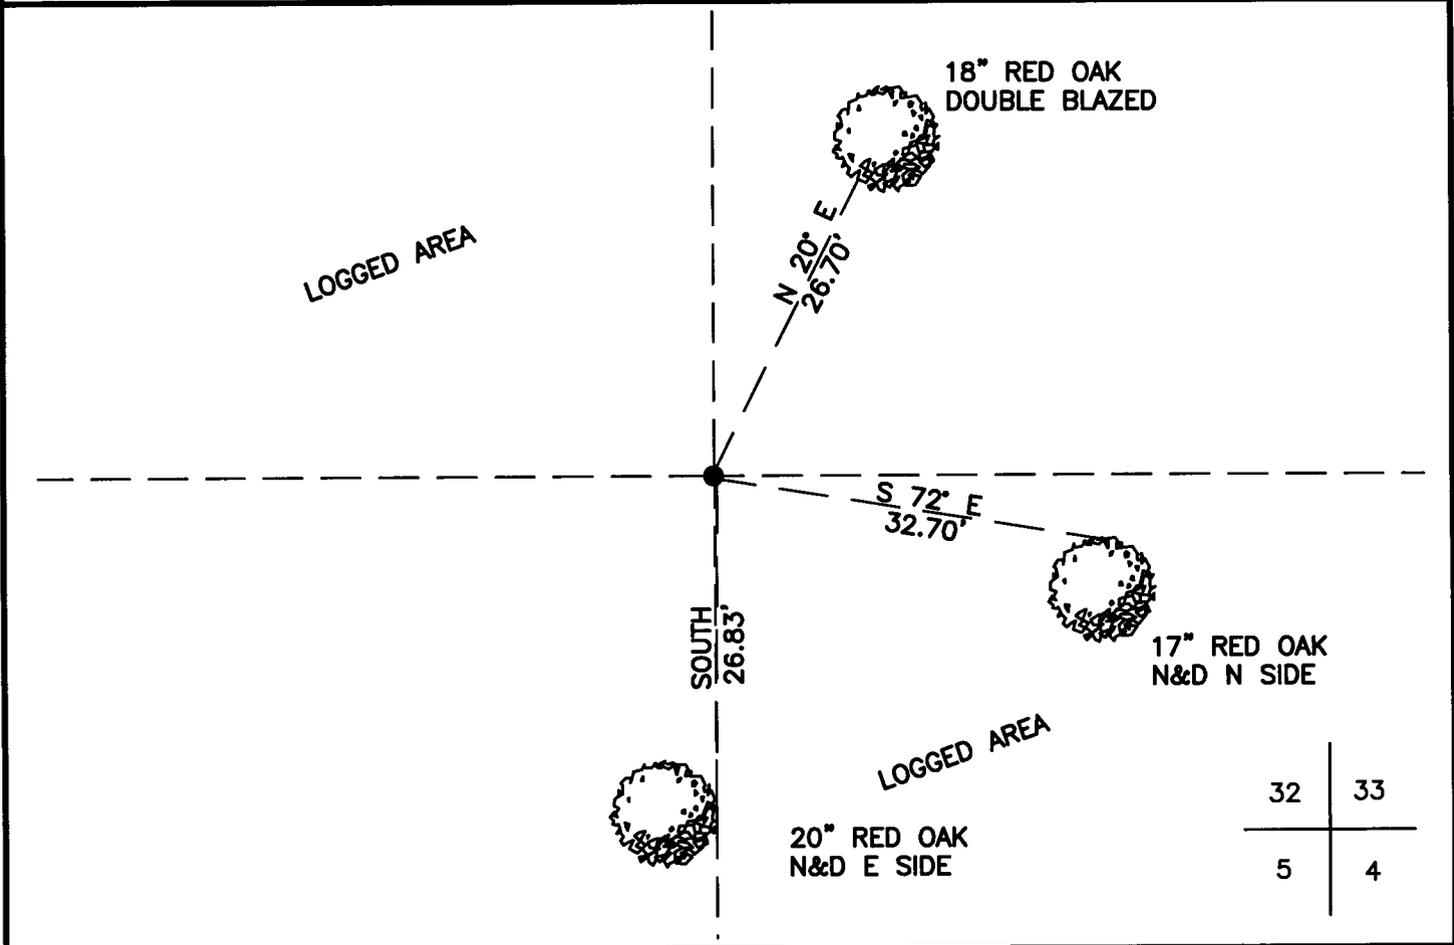

**"SKETCH OF REFERENCE TIES"**  
 (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

CASS COUNTY SOUTH COORDINATES

Northing: 336656.039  
 Easting: 557184.553

NAD 83/2007 Adjustment.  
 Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Jarrett M. Leas  
 signature

3-21-13  
 date

Jarrett M. Leas, Minnesota License No. 42619

Statement of Evidence

**Southeast corner of Section 32, Township 139 North, Range 28 West, 5th Principal Meridian.**

- 1863 The US General Land Office, in the notes of the subdivision of Township 139 North, Range 29 West set a post for the original corner and referenced it as follows:  
10" Aspen            N 72° E        17 links                    9" Bl. Oak    S 20° E        19 links  
7" Aspen            S 63° W        24 links                    14" Aspen    S 8° W        8 links  
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- 1918 Ben Clark, RLS 231, Survey Record 434, Book C, Page 296, on file in the CCSO, indicates a 4"X3' Popple post was set with a mound of stone around it.
- 1922 Ben Clark RLS 231, document no. 69796, on file at the CCSO, a county resurvey indicates an iron monument.
- 1939 The corner card for this corner on file at the CCSO, indicates the CCC Washburn Lake field book no. 13, page 43, finding the corner. KLJ attempts to locate the CCC field books or copies were unsuccessful.
- 1981 David Landecker, RLS 17008, according to the corresponding corner card located at the Crow Wing County Surveyors Office, indicates a search was made, and no evidence of the corner was found.
- 1989 Tony Kerick, RLS 12266, Crow Wing County Surveyor, corner record number 515, document number 419104, on file at the Crow Wing County Recorders Office, found a 2 1/2" capped galvanized iron pipe flush with the top of a small pile of rocks. Mr. Kerick marked the following bearing trees:  
10" Red Oak        N 20° E        26.70'                    6" Red Oak    N 52° W        46.13'  
8" Ash            S 27° E        44.39'                    8" Red Oak    S 20° W        14.73'
- 2012 A KLJ survey crew found a 2 1/2" capped iron pipe, and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

