

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 6
Township 138 N, Range 32 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000591921

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/26/2013 11:00:12 AM

AS DOC #: A000591921
PAGES: 2
REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER
BY SR Dep


On _____, found a(n): _____
DATE

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On 10/16/2012, set a(n): 5/8" X 24" Rebar with Plastic Cap Stamped "Leas MN 42619" 0.5' Below Surface, Monument was set on Road Centerline and Fence Line Heading East

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

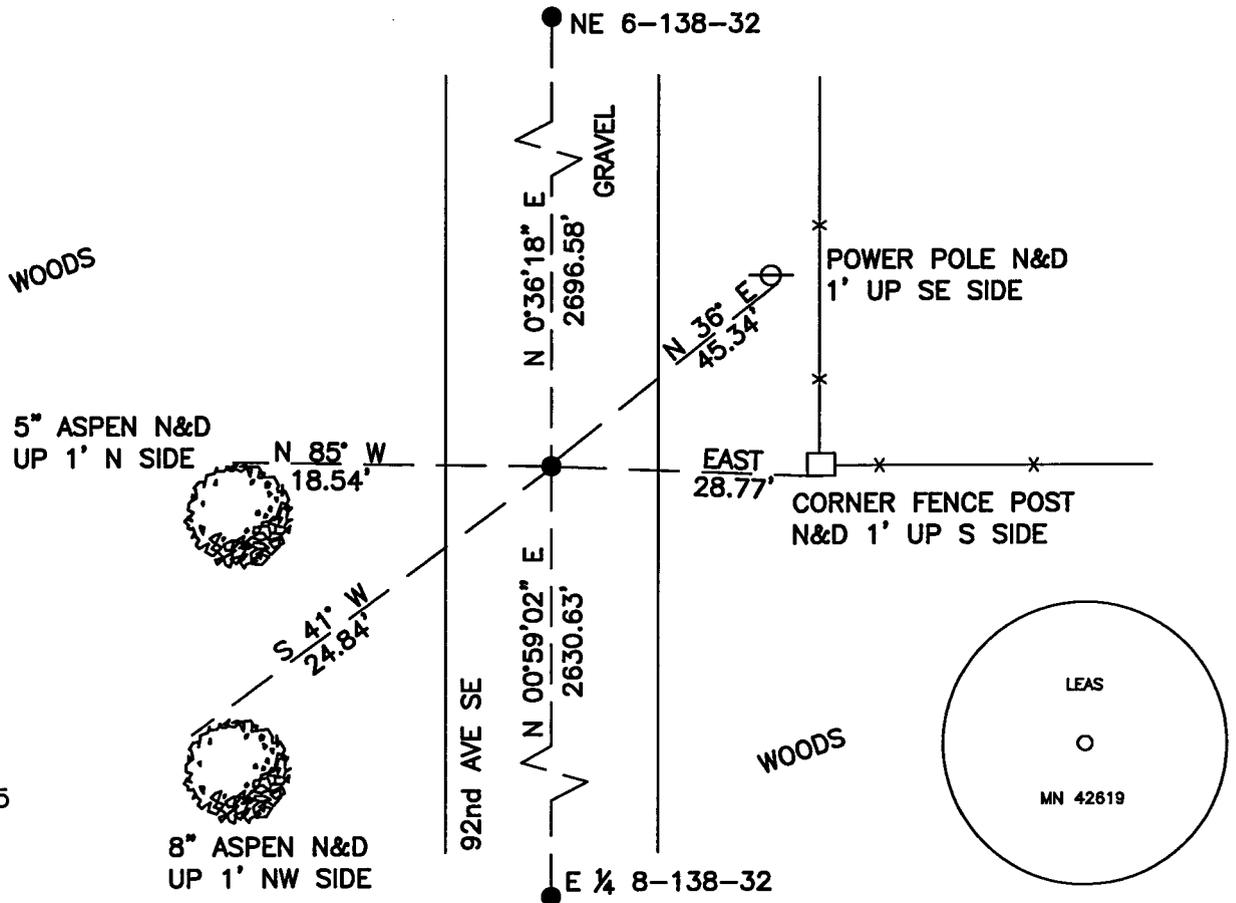

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 333627.72
Easting: 425086.87

NAD 83/2007 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

3-21-13
date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000591921



Statement of Evidence

East Quarter corner Section 6, Township 138 North, Range 32 West, Cass County Minnesota

- 1860 The Original Survey was run and a post was set to mark the corner with the following accessories: 6" Black Pine S 18 W 18 links and a 30" White Pine N 76 E 253 links.
- 1908 John Curo set a 4"x4"x40" post from old White Pine BT to mark the corner. County Survey Record Book A, page 418-424.
- 2012 Kadrmas Lee & Jackson field crews searched the area and found nothing. A 5/8" x 24" rebar with plastic cap stamped "Leas MN 42619" was set at the intersection of centerline and an old fence heading east. The following ties were made: Power pole N 36 E 45.34', corner fence post East 28.77', 8" Aspen S 41 W 24.84', and a 5" Aspen N 85 W 18.54'.
- 2012 Jarrett Leas, RLS 42619, after analysis of record and survey information accepts this monument as the true location of the corner.

Contacts pertaining to this corner are as follows:

- Cass County Surveyor's Office
- Cass County Recorder's Office
- Cass County Engineer's Office
- MN Department of Natural Resources
- MN Department of Transportation
- Bruce Skipton RLS 17768