


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 18, Township 139, Range 30, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 08-20-09 found a cast iron monument in gravel surface.
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_

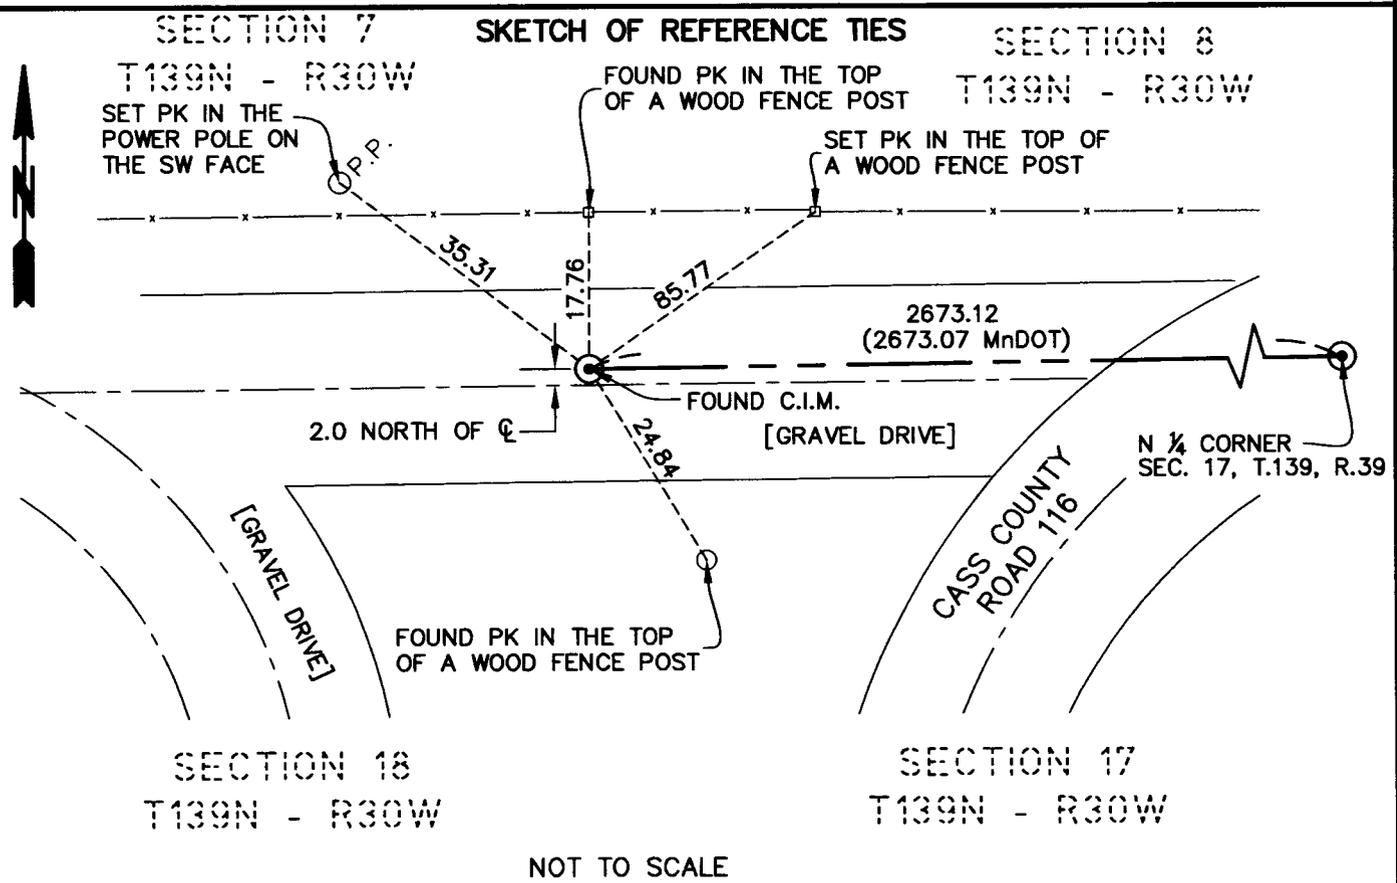

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Mary E. Carr*      11-6-09  
SIGNATURE      DATE

Registration No. 40035

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer



**A000592270**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

5/7/2013 10:39:32 AM

AS DOC #: A000592270

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY SR Dep

STATEMENT OF EVIDENCE

The Northeast Corner of Section 18, Township 139 North, Range 30 West of the 5th Principal Meridian.

This corner was originally a wood post set by the Government Land Office in 1865.

In 1907, Mr. John Curo, Cass County Surveyor, found evidence of the four original bearing trees and set a 8"X8"X36" concrete post. (Book D of Surveys page 260-261)

In 1941, Mr. Curo found his concrete post and set new ties.

In, 1967, County Surveyor R.F. Schneider found the concrete post and replaced it with a Cass County cast iron monument and recorded a Certificate of Location..

The Minnesota Department of Transportation's Right of Way Plat No. 11-3, recorded in 1983 under Doc. No. 270483, shows a Cass County cast iron monument at the corner with an azimuth and distance cited to the North Quarter corner of Section 17, Township 139 North, Range 30 West.

On 8-20-09, a survey crew from Ulteig Engineers found a cast iron monument at the correct distance stated on the aforementioned MnDOT plat. Ties were set as shown.

